

# EM120 Series

100BASE-FX Multi-Mode/Single-Mode to 100BASE-FX Single-Mode Fiber Media Converter



## Overview

The EM120 Series provides media conversion between 100BASE-FX Fiber and 100BASE-FX Fiber. Easy plug-and-play design facilitates network infrastructure construction. The EM120 series is designed for SC, ST and WDM fiber connection selections. The commercial grade media converter supports EtherWAN EMC1600 chassis system for easy group installation. The EM120 is the ideal media converter for enterprise environments.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### Plug-and-Play Media Converter

» Easy installation, plug-and-play without additional configuration, providing store-and-forward data transmission

### Fiber to Fiber Conversion

- » Supports single mode or multi-mode fiber connector
- » Supports SC/ST/WDM fiber connector

### Optional Chassis System

» Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

# Specifications

## Technology

### Standards

- IEEE 802.3u 100BASE-TX/FX

### Forward and Filtering Rate

- 148,810pps for 100Mbps
- 

## Power

### Input

- 12VDC

### Power Consumption

- 2.76W Max. 0.23A@12VDC
- 

## Mechanical

### Casing

- Aluminum Case

### Dimensions

- 80.3 x 109.2 x 23.8mm (W x D x H)  
(3.16" x 4.30" x 0.94")

### Weight

- 150g (0.33lb.)

### Installation

- Wall mounting or use with EMC1600 media converter chassis system
- 

## Interface

### Ethernet Port

- 100BASE-FX: 2 ports

### LED Indicators

- Per Unit: Power Status (Power), Link
-

## Environment

### Operating Temperature

- 0 to 45°C (32 to 113°F)

### Storage Temperature

- -10 to 70°C (14 to 158°F)

### Ambient Relative Humidity

- 5% to 95% (non-condensing)

## Regulatory Approvals

### ISO


- Manufactured in an ISO 9001 facility

### Emission Compliances


CE Mark Class A

FCC Part 15B Class A

## Application

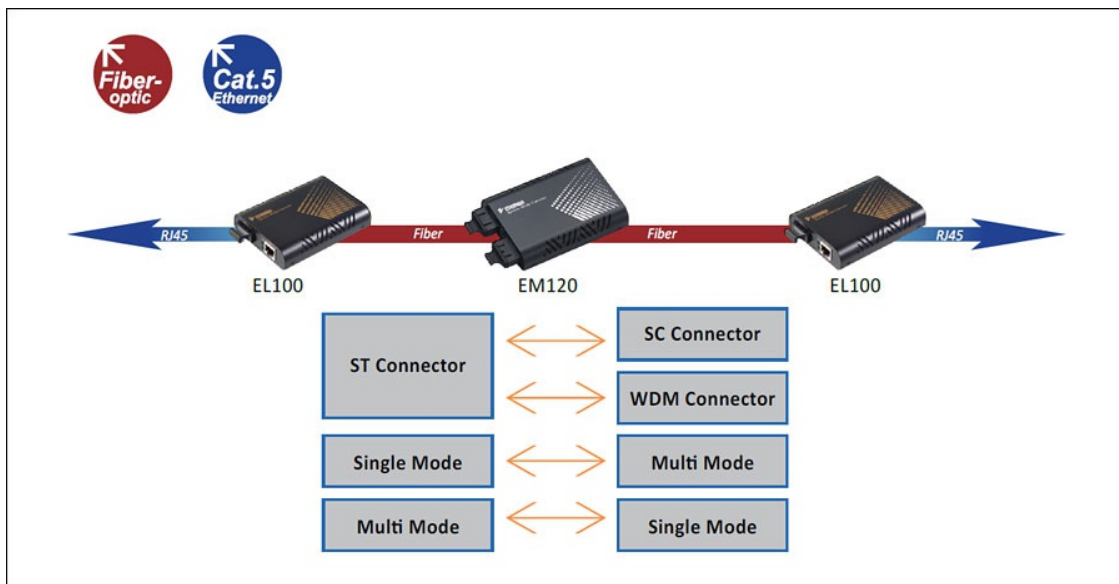

## Dimensions

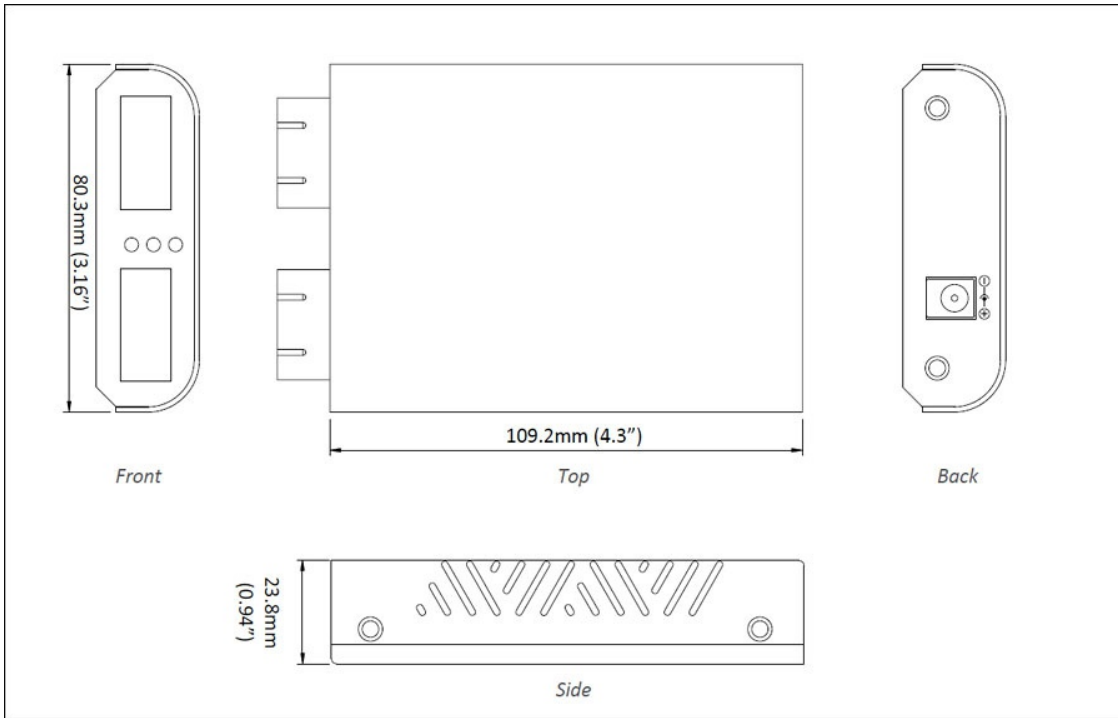

## Ordering Info

### Model

<b>EM120MCC-15</b>	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (SC) - 15Km Media Converter (1310nm)
<b>EM120MCC-40</b>	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (SC) - 40Km Media Converter (1310nm)
<b>EM120MTC-40</b>	100BASE-FX MultiMode (ST) to 100BASE-FX Single Mode (SC) - 40Km Media Converter (1310nm)
<b>EM120MCT-20</b>	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (ST) - 20Km Media Converter (1310nm)
<b>EM120MTT-20</b>	100BASE-FX MultiMode (ST) to 100BASE-FX Single Mode (ST) - 20Km Media Converter (1310nm)
<b>EM120MCCA-20</b>	100BASE-BX MultiMode (SC) to 100BASE-FX Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km Media Converter
<b>EM120MCCB-20</b>	100BASE-BX MultiMode (SC) to 100BASE-FX Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km Media Converter
<b>EM120MTCA-20</b>	100BASE-BX MultiMode (ST) to 100BASE-FX Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km Media Converter
<b>EM120MTCB-20</b>	100BASE-BX MultiMode (ST) to 100BASE-FX Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km Media Converter

#### Notes:

- \* Single Mode to Single Mode version converters are also available.
- \* EMC1600, proprietary 19" chassis system, can house up to 16 x EM120 Series Converters.
- \* EMC1600 Chassis System is available separately.
- \* More 100FX fiber options are also available upon request.

