

EM120 Series

Multi Mode Fiber to Single Mode Fiber Media Converter



Overview

The EM120 Series provides media conversion between 100BASE-FX Fiber and 100BASE-FX Fiber. Easy plug-and-play design facilitates network infrastructure construction. The EM120 series is designed for SC, ST and WDM fiber connection selections. The commercial grade media converter supports EtherWAN EMC1600 chassis system for easy group installation. The EM120 is the ideal media converter for enterprise environments.

EtherWAN — "When Connectivity is Crucial."

Spotlight

Plug-and-Play Media Converter

» Easy installation, plug-and-play without additional configuration, providing store-and-forward data transmission

Fiber to Fiber Conversion

- » Supports single mode or multi-mode fiber connector
- » Supports SC/ST/WDM fiber connector

Optional Chassis System

» Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

Specifications

Technology

Standards

- IEEE 802.3u 100BASE-TX/FX

Forward and Filtering Rate

- 148,810pps for 100Mbps
-

Power

Input

- 12VDC

Power Consumption

- 2.76W Max. 0.23A@12VDC
-

Mechanical

Casing

- Aluminum Case

Dimensions

- 80.3 x 109.2 x 23.8mm (W x D x H)
(3.16" x 4.30" x 0.94")

Weight

- 150g (0.33lb.)

Installation

- Wall mounting or use with EMC1600 media converter chassis system
-

Interface

Ethernet Port

- 100BASE-FX: 2 ports

LED Indicators

- Per Unit: Power Status (Power), Link
-

Environment

Operating Temperature

- 0 to 45°C (32 to 113°F)

Storage Temperature

- -10 to 70°C (14 to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO


- Manufactured in an ISO 9001 facility

Emission Compliances


CE Mark Class A

FCC Part 15B Class A

Application

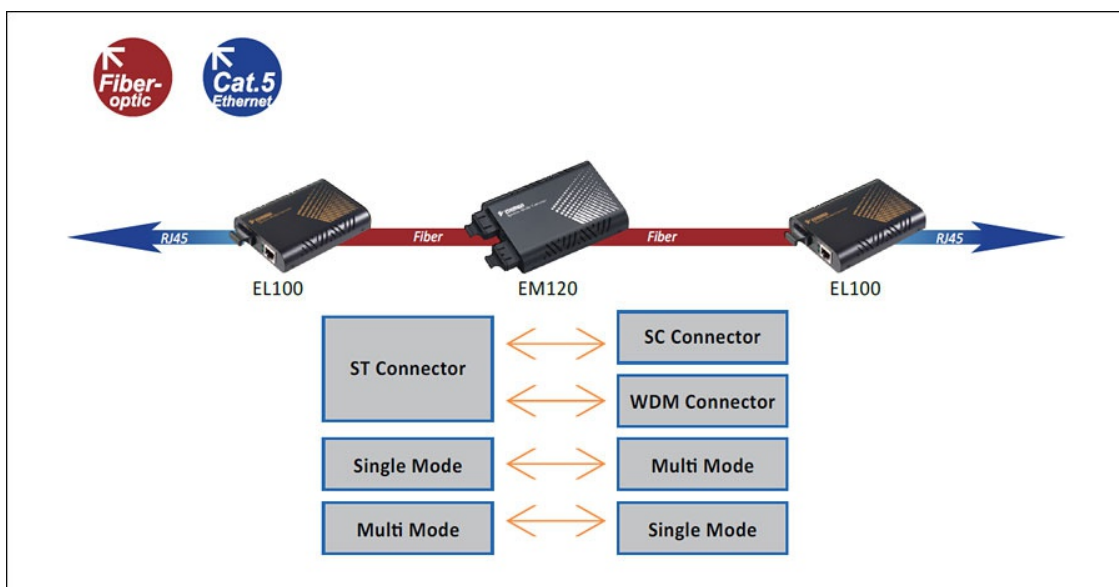

Dimensions

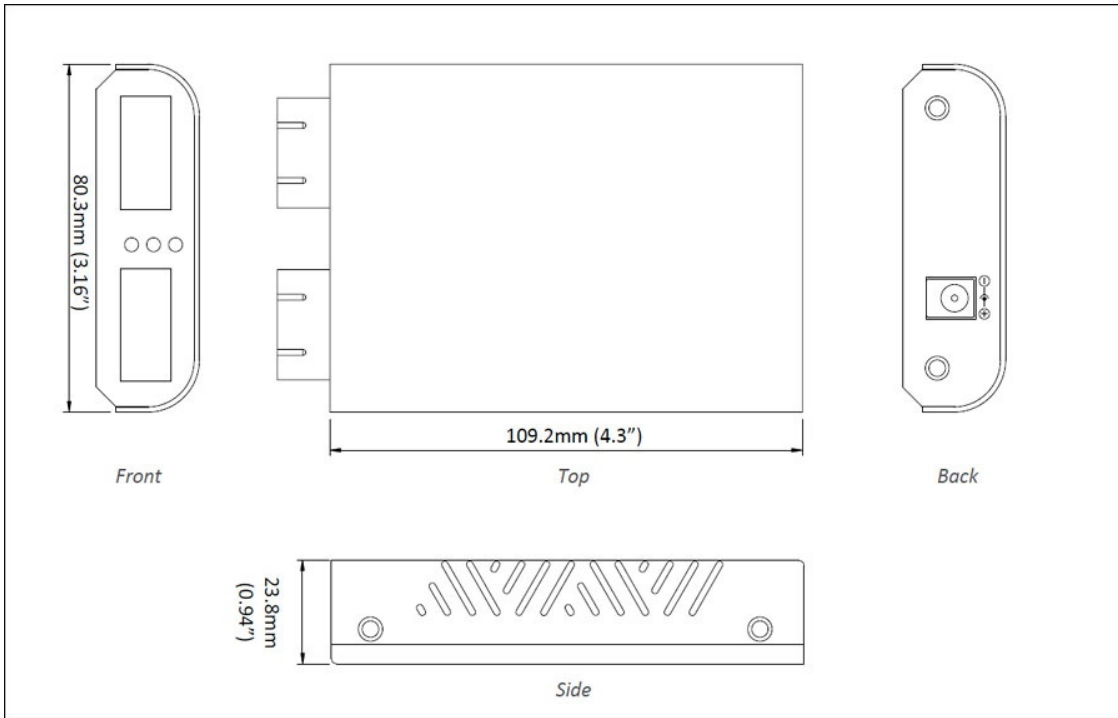

Ordering Info

Model

EM120MCC-15	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (SC) - 15Km Media Converter (1310nm)
EM120MCC-40	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (SC) - 40Km Media Converter (1310nm)
EM120MTC-40	100BASE-FX MultiMode (ST) to 100BASE-FX Single Mode (SC) - 40Km Media Converter (1310nm)
EM120MCT-20	100BASE-FX MultiMode (SC) to 100BASE-FX Single Mode (ST) - 20Km Media Converter (1310nm)
EM120MTT-20	100BASE-FX MultiMode (ST) to 100BASE-FX Single Mode (ST) - 20Km Media Converter (1310nm)
EM120MCCA-20	100BASE-BX MultiMode (SC) to 100BASE-FX Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km Media Converter
EM120MCCB-20	100BASE-BX MultiMode (SC) to 100BASE-FX Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km Media Converter
EM120MTCA-20	100BASE-BX MultiMode (ST) to 100BASE-FX Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km Media Converter
EM120MTCB-20	100BASE-BX MultiMode (ST) to 100BASE-FX Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km Media Converter

Notes:

- * Single Mode to Single Mode version converters are also available.
- * EMC1600, proprietary 19" chassis system, can house up to 16 x EM120 Series Converters.
- * EMC1600 Chassis System is available separately.
- * More 100FX fiber options are also available upon request.

