

## EX73000 シリーズ

広範囲動作温度対応産業用/管理型 16ポート 10/100BASE +2ポート ギガビット コンボ イーサネット スイッチ



## 特長

### + Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)  
Fanless operation  
High impact, thermal shock, and electrical noise resistance

### + Compliance

EN 50121-4 certified for railway applications  
NEMA TS2 rated  
UL certified for safety

### + Management/Security Features

Port control  
802.1x port-based network access control and remote authentication through RADIUS and TACACS+  
Configure and monitor with eVue™ and eLite™

### + Support

Complimentary Technical Support  
Free Firmware Upgrades  
Limited Lifetime Warranty

## 概要

EtherWAN の EX73000 シリーズは広範囲動作温度対応/管理型 最大18ポート運用が可能なイーサネットスイッチです。通信の安定性が不可欠な過酷な環境に対応する堅牢な管理機能を備えたハイパフォーマンスな製品です。

EX73000 シリーズは 10/100BASE ファスト イーサネット16ポートを装備し、ギガビット SX/LX/BX/WDM 光コンボ ポート2個を選択できます。DIN レールに対応した EX73000 シリーズはリング構成の1ルートが遮断されても 15ms 以内で自動復帰するAlpha-Ring という独自リングプロトコルを搭載していて、高度な接続信頼性が必要な環境に柔軟に対応します。

ポート セキュリティやIGMP、VLAN、GARP プロトコル、LACP、などの管理機能はブラウザ経由で設定可能です。Telnet、SSH、SNMP、RMON、TFTP、RS-232 コンソール接続などにも対応します。

EtherWAN — "When Connectivity is Crucial."

## 機能

### + Interface

CLI, Telnet, Web Browser  
SNMP v1/v2c/v3

### + Management

Firmware upgrade  
Configuration backup via TFTP  
DHCP Server/Client  
RMON (Remote Monitoring): group 1, 2, 3, 9  
Port Mirroring: TX/RX and both  
NTP (Network Time Protocol) synchronization  
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)  
IPv4/IPv6

### + Security

MAC Address Filtering  
Enable/Disable port  
Storm control (Broadcast and multicast types)  
IEEE 802.1x LAN Access Control  
Remote authentication through RADIUS  
SSH for CLI and Telnet security  
SSL for web security  
System log (Remote/Local)  
Multi-level user account/password against unauthorized configuration

### + Quality of Service (QoS)

Priority Queues: 4 queues per port  
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode  
Rate Limiting (Ingress/Egress)

### + Layer 2 Features

**Auto-negotiation for port speed and duplex**  
Flow Control  
IEEE 802.3x Full duplex mode  
Back-Pressure half duplex mode

#### Redundant Protocols

IEEE 802.1D STP  
IEEE 802.1w RSTP  
IEEE 802.1s MSTP  
EtherWAN's Alpha-Ring network fault recovery (<15ms)

#### VLANs

Port-based VLANs  
IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)  
GVRP  
GMRP

#### Link Aggregation

Static Trunk (2 groups, support MAC base)  
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

### + Performance

**Switching Capability**  
7.2Gbps

## 仕様

### + Interface

#### Ethernet

16 x 10/100BASE-T(X)

0, 1 or 2 x Gigabit

#### Console

1 x DB9 RS-232

#### Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

#### LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green: Copper, Orange: Fiber)

### + Technology

#### Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1x PNAC

#### Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

#### Packet Buffer Memory

12M bits

#### Processing Type

Store-and-Forward

Auto-negotiation

Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control

Auto MDI/MDIX

#### Address Table Size

16K MAC Addresses

### + Power

#### Input

12-48VDC Redundant (Terminal block)

#### Power Consumption

8.06W 0.336A@24VDC

Protection  
Reverse Polarity Protection

## + Physical

Casing Material  
Aluminum

IP Rating  
IP30

Dimensions  
60 x 125 x 145mm (W x D x H)  
2.56" x 4.92" x 5.71"

Weight  
1.19kg

Installation Type  
DIN-rail mounting

## + Environmental

**Operating Temp.**  
-40 to 75°C (-40 to 167°F)  
Tested @ -40 to 85°C (-40 to 185°F)

**Storage Temp.**  
-45 to 85°C (-49 to 185°F)

**Relative Humidity**  
5% to 95% (non-condensing)


## + Regulatory

**ISO**  
Manufactured in ISO-9001 facility

**EMI**  
FCC Part 15B Class A  
EN 61000-6-4  
EN 61000-3-2  
EN 61000-3-3

**EMS**  
EN 61000-6-2  
EN 61000-4-2 (ESD)  
EN 61000-4-3 (Radiated RFI)  
EN 61000-4-4 (Burst)  
EN 61000-4-5 (Surge)

## 寸法図

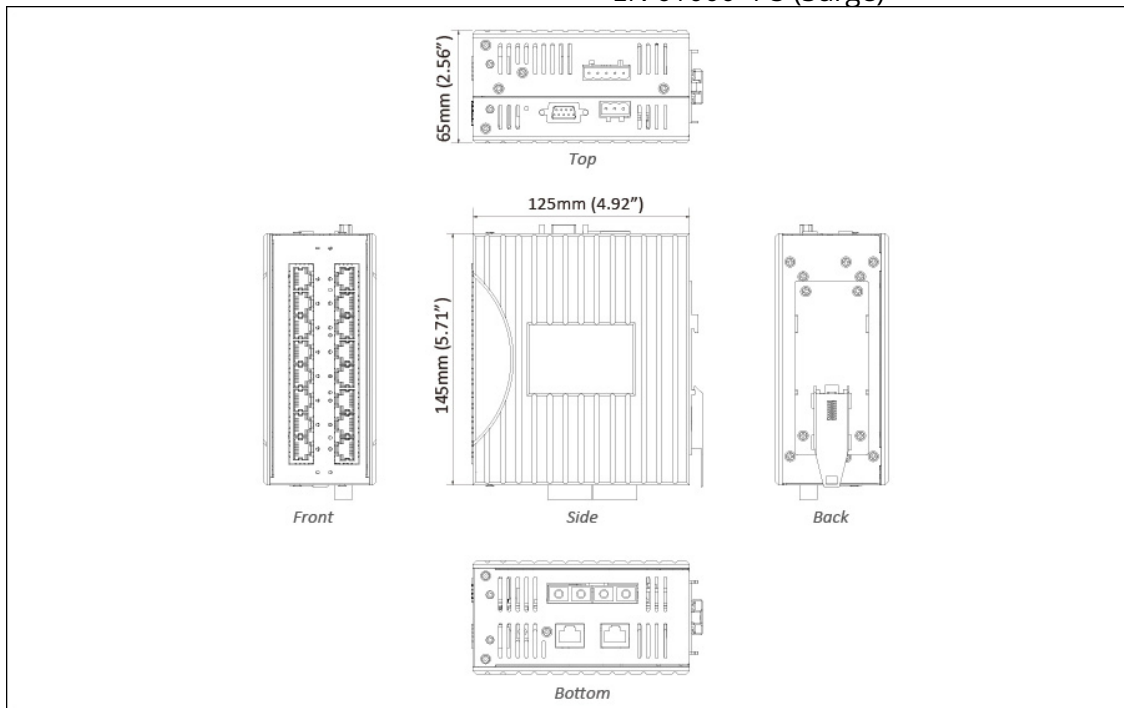

### Details


[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included

**Device**  
Ethernet Switch


**Documentation**  
Quick Install Guide

# 応用例

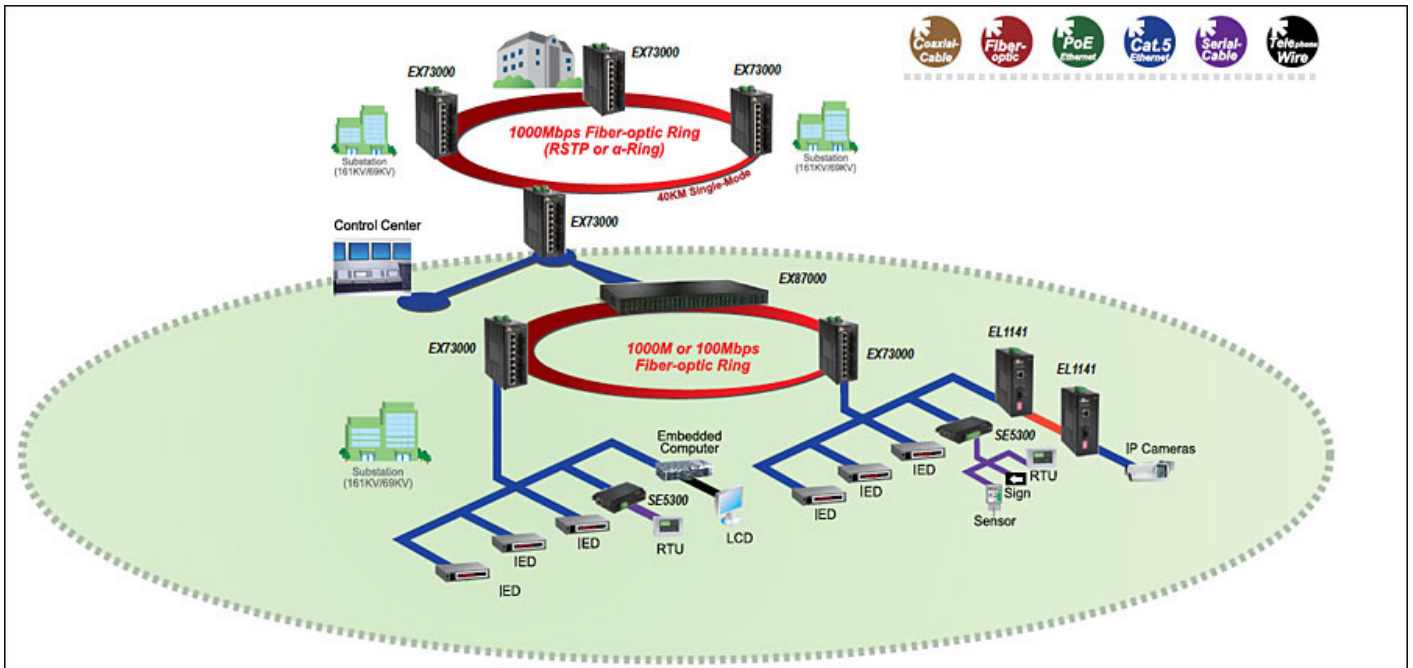

# ソフトウェア


Network Management [eVue™ Network Configuration and Monitoring Tool](#)  
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

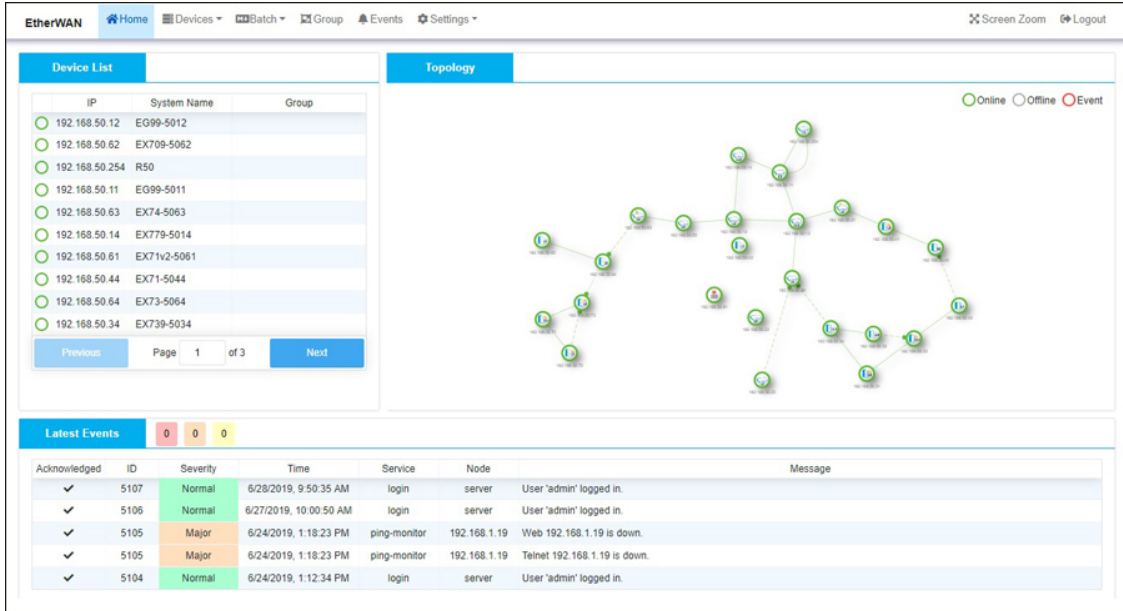

The screenshot shows the EtherWAN web interface. On the left, there is a 'Device List' table with columns for IP, System Name, and Group. The table contains 12 entries, all with green status indicators. On the right, there is a 'Topology' diagram showing a network of interconnected nodes, some green (Online) and some grey (Offline). Below these, there is a 'Latest Events' section with a table of recent events.

| IP             | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12  | EG99-5012   |       |
| 192.168.50.62  | EX709-5062  |       |
| 192.168.50.254 | R50         |       |
| 192.168.50.11  | EG99-5011   |       |
| 192.168.50.63  | EX74-5063   |       |
| 192.168.50.14  | EX779-5014  |       |
| 192.168.50.61  | EX71v2-5061 |       |
| 192.168.50.44  | EX71-5044   |       |
| 192.168.50.64  | EX73-5064   |       |
| 192.168.50.34  | EX739-5034  |       |

| Acknowledged | ID   | Severity | Time                   | Service      | Node         | Message                      |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓            | 5107 | Normal   | 6/28/2019, 9:50:35 AM  | login        | server       | User 'admin' logged in.      |
| ✓            | 5106 | Normal   | 6/27/2019, 10:00:50 AM | login        | server       | User 'admin' logged in.      |
| ✓            | 5105 | Major    | 6/24/2019, 1:18:23 PM  | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down.    |
| ✓            | 5105 | Major    | 6/24/2019, 1:18:23 PM  | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓            | 5104 | Normal   | 6/24/2019, 1:12:34 PM  | login        | server       | User 'admin' logged in.      |

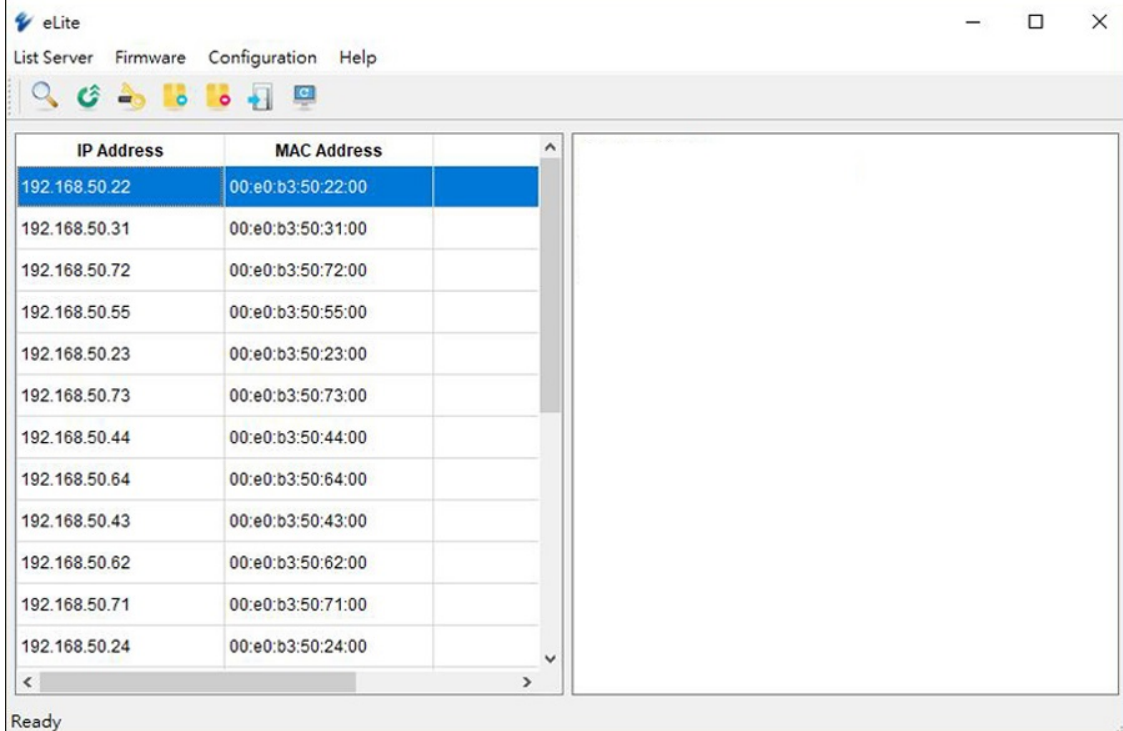

The screenshot shows the eLite application window. It has a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu is a toolbar with various icons. The main area contains a table with two columns: 'IP Address' and 'MAC Address'. The table lists 14 entries, each with an IP address and a corresponding MAC address.

| IP Address    | MAC Address       |
|---------------|-------------------|
| 192.168.50.22 | 00:e0:b3:50:22:00 |
| 192.168.50.31 | 00:e0:b3:50:31:00 |
| 192.168.50.72 | 00:e0:b3:50:72:00 |
| 192.168.50.55 | 00:e0:b3:50:55:00 |
| 192.168.50.23 | 00:e0:b3:50:23:00 |
| 192.168.50.73 | 00:e0:b3:50:73:00 |
| 192.168.50.44 | 00:e0:b3:50:44:00 |
| 192.168.50.64 | 00:e0:b3:50:64:00 |
| 192.168.50.43 | 00:e0:b3:50:43:00 |
| 192.168.50.62 | 00:e0:b3:50:62:00 |
| 192.168.50.71 | 00:e0:b3:50:71:00 |
| 192.168.50.24 | 00:e0:b3:50:24:00 |

## 製品型番

### + Model

EX73400-00B 16-port 10/100BASE-TX  
 EX73402-0YB 16-port 10/100BASE-TX + 2-port Gigabit (Combo)

\* DIN-Rail mounting kit included.

### + Gigabit Fiber Options (Y)

1 10/100/1000BASE-TX (No Gigabit Fiber port supported)  
 3 Combo port: 10/100/1000BASE-TX with 1000BASE-SX (SC) - 550m  
 4 Combo port: 10/100/1000BASE-TX with 1000BASE-SX (SC) - 2Km  
 5 Combo port: 10/100/1000BASE-TX with 1000BASE-SX (ST) - 550m  
 A Combo port: 10/100/1000BASE-TX with 1000BASE-LX (SC) - 10Km  
 B Combo port: 10/100/1000BASE-TX with 1000BASE-LX (SC) - 20Km

### + Accessories

|                                     |  |
|-------------------------------------|--|
| Hardened SFP Modules                | <a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>         |
| DIN-Rail Power Supplies             | <a href="http://www.etherwan.com/products/din-rail-power-supply">www.etherwan.com/products/din-rail-power-supply</a><br>(* ) |
| *Recommended Power Supply<br>EB-232 | HDR-30-24 30W 24VDC DIN-Rail Power Supply<br>Configuration Backup and Restoration Tool                                       |

