

EX71000 シリーズ

広範囲動作温度対応産業用/管理型 8ポート 10/100BASE +2ポート ギガビット 光オプションイーサネット スイッチ



特長

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ Compliance

EN 50121-4 certified for railway applications
NEMA TS2 rated
UL certified for safety

+ Management/Security Features

Port control
802.1x port-based network access control and remote authentication through RADIUS and TACACS+
Configure and monitor with eVue™ and eLite™

+ Support

Complimentary Technical Support
Free Firmware Upgrades
Limited Lifetime Warranty

概要

EtherWANのEX71000は8個の10/100BASEポートと2個のギガ光ポートを装備し、SX/LX/BX/WDM光ポートとSFPも選択できる産業用イーサネットスイッチです。

冗長化機能(STP/RSTP/MSTP)に対応し、リング構成の1ルートが遮断されても15ms以内で自動復帰するAlpha-RingというEtherWAN独自リングプロトコルを搭載。IPv4/IPv6プロトコルやポートセキュリティ、IGMPスヌーピング、VLANs、GARPプロトコルとLACPなどの管理機能をブラウザ経由で設定可能。

Telnet、SNMP、RMON、TFTP、RS-232コンソールなどにも接続できます。EX71000シリーズは堅牢で広温度範囲(-40~70°C)に対応し、過酷な環境でのご使用に最適な選択です。

EtherWAN — "When Connectivity is Crucial."

機能

+ Interface

CLI, Telnet, Web GUI
SNMP v1/v2c/v3

+ Management

Firmware upgrade
Configuration backup via TFTP
DHCP Server/Client
RMON (Remote Monitoring): group 1, 2, 3, 9
Port Mirroring: TX/RX and both
NTP (Network Time Protocol) synchronization
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
IPv4/IPv6

+ Security

MAC Address Filtering
Enable/Disable port
Storm control (Broadcast and multicast types)
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
SSH for CLI and Telnet security
SSL for web security
System log (Remote/Local)
Multi-level user account/password against unauthorized configuration

+ Quality of Service (QoS)

Priority Queues: 4 queues per port
Traffic classification based on IEEE 802.1p CoS,
DSCP, WRR and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-Pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery (<15ms)

VLANs

Port-based VLANs
IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
GVRP
GMRP

Link Aggregation

Static Trunk (2 groups, support MAC base)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

仕様

+ Interface

Ethernet

4, 6 or 8 x 10/100BASE-T(X)

0 or 4 x 100BASE-FX

0, 1 or 2 x Gigabit

Console

1 x DB9 RS-232

Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

LED Indicators

Per Unit: Power 1, Power 2, Alarm

Per Port: Link/Activity, Speed

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1x PNAC

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

Packet Buffer Memory

12M bits

Processing Type

Store-and-Forward

Auto-negotiation

Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control

Auto MDI/MDIX

Address Table Size

16K MAC Addresses

+ Power

Input

12-48VDC Redundant (Terminal block)

Power Consumption

7.5W Max. 0.31A@24VDC

Protection
Reverse Polarity Protection

+ Physical

Casing Material
Aluminum

IP Rating
IP30

Dimensions
60 x 125 x 145mm (W x D x H)
2.36" x 4.92" x 5.7"

Weight
1.05kg

Installation Type
DIN-rail mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)
Tested @ -40 to 85°C (-40 to 185°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
EN 55032
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic Field)

Safety
UL 61010
ISA 12.12.01

Vibration
IEC 60068-2-6 Fc

Shock
IEC 60068-2-27 Ea

Free Fall
FED STD 101C Method 5007.1

Industrial Compliance
NEMA TS2
EN 50121-4

+ Warranty

Length
Limited Lifetime


Details
www.etherwan.com/support/warranty-policy

+ What's Included


Device
Ethernet Switch

Cables
1 Console Cable
Documentation
Quick Install Guide

寸法図

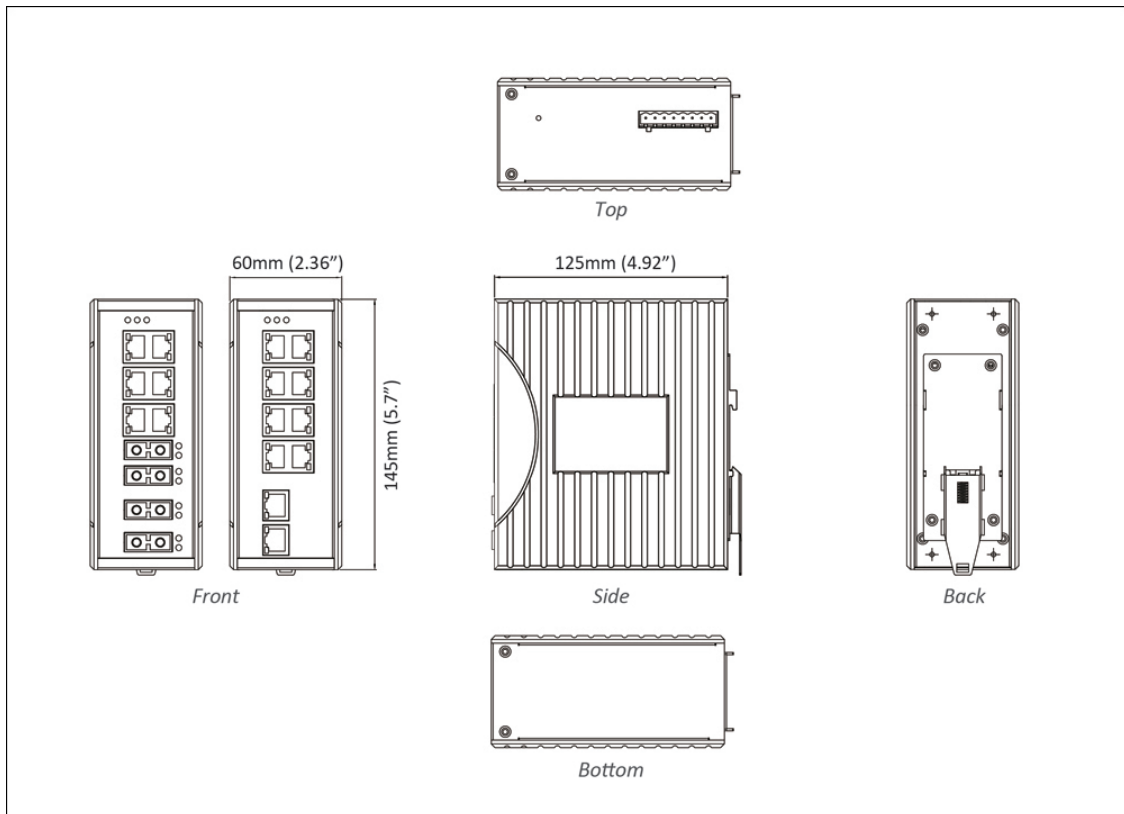


応用例

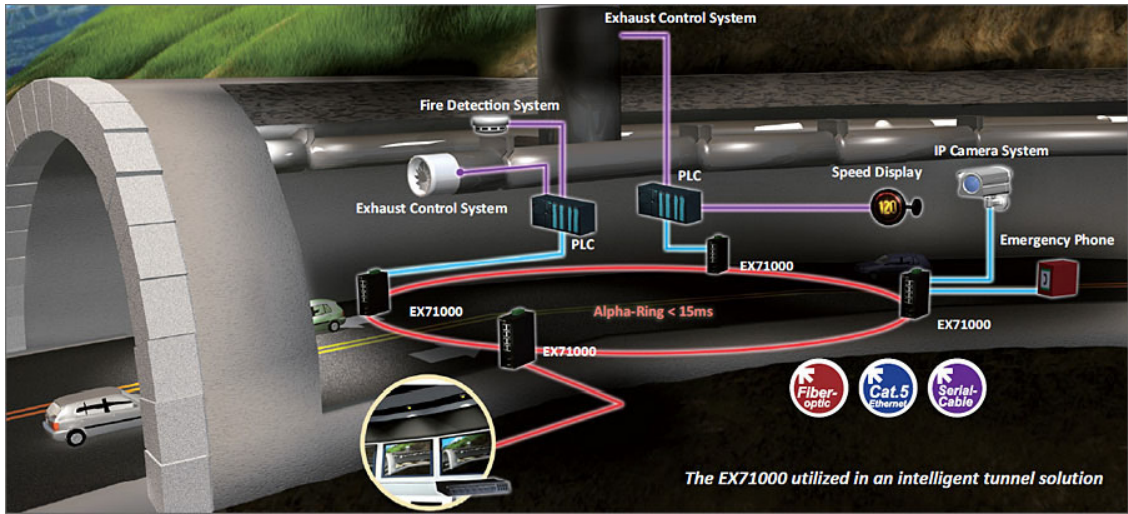

ソフトウェア

Network Management [eVue™ Network Configuration and Monitoring Tool](#)
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

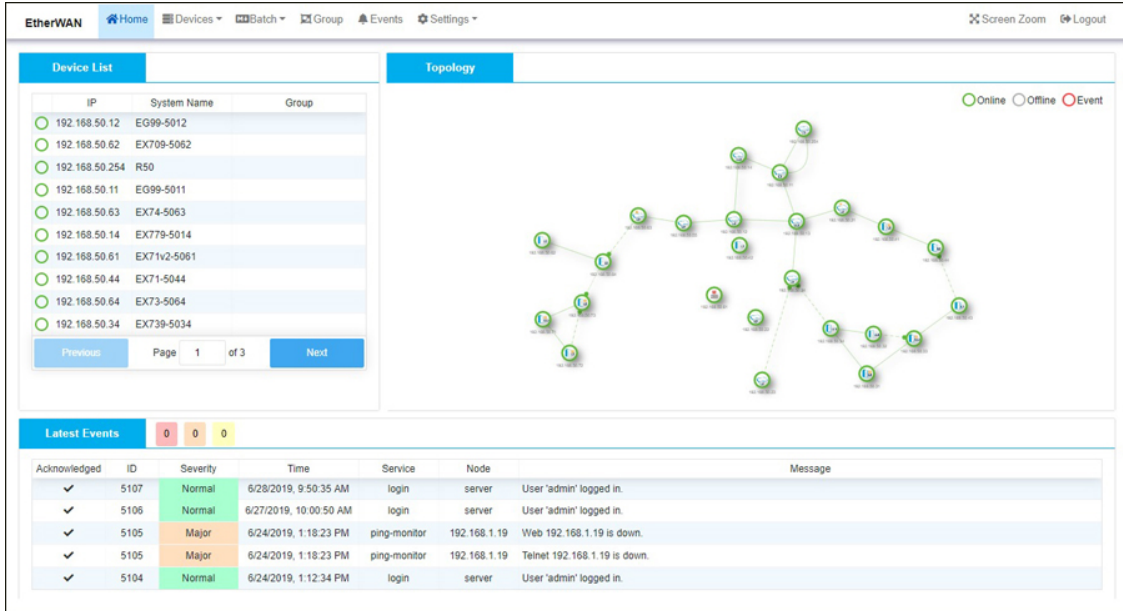

The screenshot shows the EtherWAN web interface. At the top, there are navigation tabs: Home, Devices, Batch, Group, Events, and Settings. The main content area is divided into two sections: 'Device List' and 'Topology'.


Device List: A table with columns for IP, System Name, and Group. It lists 12 devices, all with green status indicators.

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Topology: A network diagram showing various nodes connected in a mesh-like structure. A legend indicates Online (green circle), Offline (grey circle), and Event (red circle).

Latest Events: A table showing recent system events.

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Teinet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

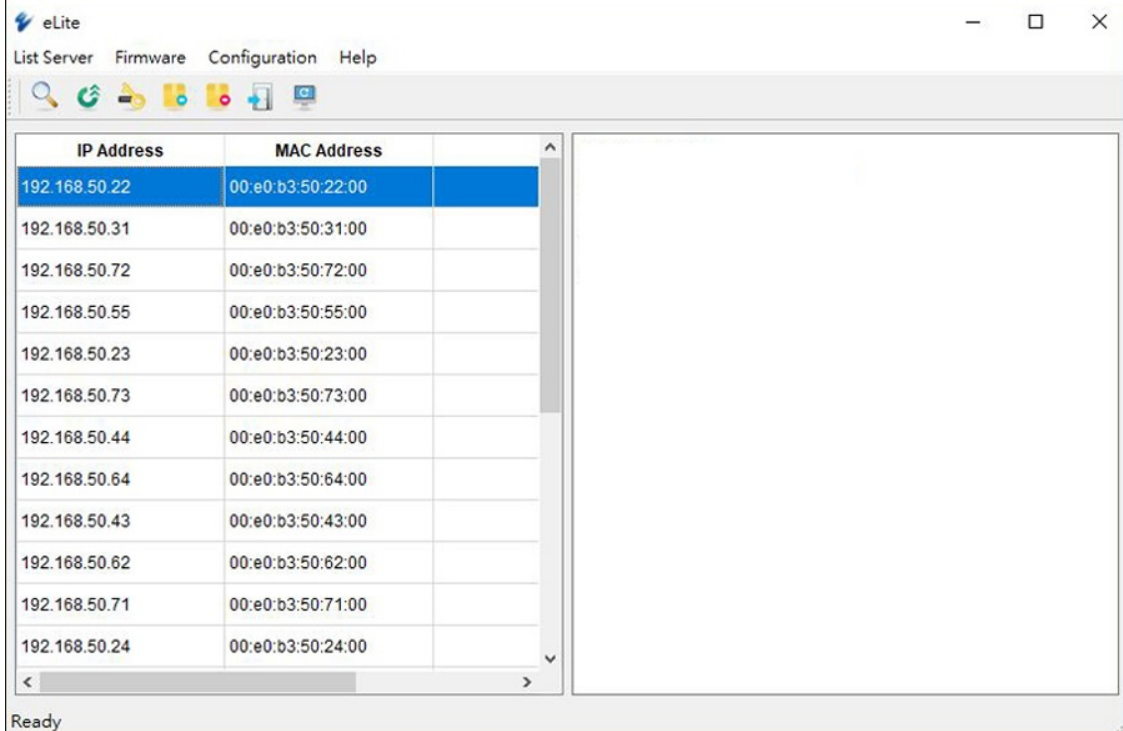

The screenshot shows the eLite application window. The title bar reads 'eLite'. The menu bar includes 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu bar is a toolbar with several icons. The main content area is a table with two columns: 'IP Address' and 'MAC Address'.

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

The status bar at the bottom left shows 'Ready'.

製品型番

+ Model

EX71802-0YB	8-port 10/100BASE-TX + 2-port Gigabit
EX71620-X0B	6-port 10/100BASE-TX + 2-port 100BASE-FX
EX71622-XYB	6-port 10/100BASE-TX + 2-port 100BASE-FX +2-port Gigabit
EX71440-X0B	4-port 10/100BASE-TX + 4-port 100BASE-FX

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
V	100BASE SFP (DDM)

* More 100FX Fiber options also available upon request.

+ Gigabit Port Options (Y)

1	10/100/1000BASE-TX
3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550m
A	1000BASE-LX (SC) - 10Km
B	1000BASE-LX (SC) - 20Km
R	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
S	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
V	100/1000BASE SFP (DDM)

* More Gigabit options also available upon request.

+ Accessories

Hardened SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply (*)
*Recommended Power Supply	HDR-30-24 30W 24VDC DIN-Rail Power Supply
EB-232	Configuration Backup and Restoration Tool

