


## IG5 Rack Series

IEC 61850-3/IEEE 1613 Lite L3 Hardened Managed 24-port Gigabit and 4-port 1G/10G SFP+ Ethernet Switch

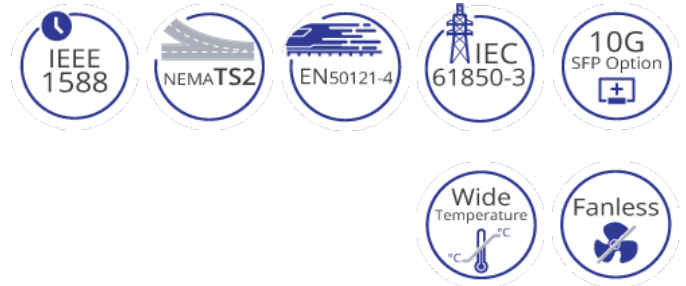

## Overview

EtherWAN's InfraGreEn IG5 Rack series managed switching platform that combines the advantages of Layer 3 routing protocols with robust management features and enhanced specifications. With support for static routing, Routing Information Protocol (RIP) v1/v2, OSPF and Virtual Router Redundancy Protocol (VRRP), these switches deliver outstanding flexibility and security in a high performance and cost-effective solution.

The IG5 Rack series providing effective modularity through a wide range of port combination options. Supports full 28 ports gigabit transmission, and supports SFP+ to achieve 10G speed. Mountable on a 1U rack, equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption, promote stronger communication networks.

EtherWAN — "When Connectivity is Crucial."

## Highlights

### + High Bandwidth and Versatility

24 full gigabit ports for high bandwidth connections  
4 x 1G/10G SFP+ uplink ports for fiber connections  
128 Gbps full duplex switching capacity  
Variant of optical and electrical port interface options

### + Time Stamped Supported

IEEE 1588v2  
- Available in all ports  
- Hardware-based time stamping  
- Operation as transparent clock

### + Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF  
Redundancy with VRRPv2  
Reduces amount of broadcast traffic

### + Flexible Rack Cabinet Installation

Dual LED Panel design, support rear and front display  
Concise communication status display  
Considerable ease of cabling management

## Features

### + Interface

CLI, Telnet, Web GUI

### + Management

Firmware Upgrade  
Configuration Backup  
DHCP Server/Client  
RMON (Remote Monitoring)  
Port Mirroring  
NTP (Network Time Protocol) Synchronization  
LLDP (Link Layer Discovery Protocol)  
IPv4/IPv6  
SNMP v1/v2c/v3  
Modbus

### + Security

MAC Address Filtering  
Enable/Disable Port  
Storm Control  
System Logging  
IEEE 802.1x LAN Access Control  
Remote Authentication through RADIUS and TACACS+  
Complex Password Support  
Multi-user Login and Privileged Access Management  
SSH for CLI and Telnet Security  
SSL and HTTPS for Web Security  
ACL (Access Control List, up to 4096 Entries)

### + Layer 2 Features

**Auto-negotiation for Port Speed and Duplex**  
Flow Control  
IEEE 802.3x full duplex mode  
Back-pressure half duplex mode

#### Redundant Protocols

IEEE 802.1D STP  
IEEE 802.1w RSTP  
IEEE 802.1s MSTP  
EtherWAN's Alpha-Ring network fault recovery

#### VLANs

IEEE 802.1Q Tag VLANs  
GVRP  
GMRP

#### Link Aggregation

Static Trunk (4 groups)  
IEEE 802.3ad LACP

#### IGMP Snooping v1/v2/v3

### + Layer 3 Features

#### IP Packet Routing

Maximum number of routes in hardware: 64 entries  
Static Routing  
RIP v1/v2  
OSPF v2

#### Routing Redundancy

VRRPv2

## + Quality of Service (QoS)

Priority Queues: 8 Queues Per Port  
Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode  
Rate Limiting (Ingress/Egress)

## + Software Properties and Performance

**Switching Fabric**  
128Gbps

**Forwarding Rate**  
95.23Mpps

**Max VLANs**  
256 (4096 VID)

**Jumbo Frame Size**  
9KB

**MAC Table Size**  
16K

**Packet Buffer Memory**  
12M bits

## Specifications

### + Interface

#### Ethernet

10/100/1000BASE-T(X): 0, 8, 16 or 24 ports

100/1000BASE SFP: 0, 8, 16 or 24 ports

1G/10G SFP+: 4 ports

#### Console

1 x RJ45

#### Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;  
Max input current: 8mA

Dry Contact: Logic Level 1–Close to GND; Logic  
Level 0-Open

#### Alarm Contact

2 x Relay output, current capacity  
0.6A/30VDC

#### LED Indicators

Per Unit: Power 1, (Single Power models)

Power 2 (Dual Power models) (Green)

Per Port: Link/Activity (Green)

Per Port: Alarm (Red)

### + Physical

#### Casing Material

Metal

#### IP Rating

IP40

#### Dimensions

442 x 325 x 44mm (W x D x H)

17.4" x 12.8" x 1.73"

#### Weight

4.6kg (10.14lbs) / 4.0kg (8.82lbs)

#### Installation Type

Rack mounting

### + Environmental

#### Operating Temp.

-40 to 75°C (-40 to 167°F)

(-40°C to 85°C for IEC 60068-2-2 Environmental 16  
hours)

#### Storage Temp.

-45 to 85°C (-49 to 185°F)

#### Relative Humidity

5% to 95% (non-condensing)

#### MTBF

446,556 hours

## + Technology

### Standards

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3ae 10Gigabit Ethernet  
IEEE 802.3ad link aggregation control  
IEEE 802.3z 1000BASE-SX/1000BASE-LX  
IEEE 802.3x full duplex and flow control  
IEEE 802.1D STP  
IEEE 802.1p QoS  
IEEE 802.1Q Tag VLANs  
IEEE 802.1s MSTP  
IEEE 802.1w RSTP  
IEEE 802.1x PNAC  
IEEE 802.1ab LLDP

### Forward/Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps  
14,881,000pps for 10Gbps

### Processing Type

Store-and-forward  
Auto-negotiation  
Half-duplex back-pressure and full-duplex flow control  
Auto MDI/MDIX

### System Memory

2Gb DDR3 SDRAM

### Flash Storage

1Gb

## + Regulatory

### ISO

Manufactured in ISO-9001 facility

### EMI

FCC Part 15B Class A  
VCCI Class A  
EN 61000-6-4

### EMS

EN 61000-6-2  
EN 61000-4-2 (ESD)  
EN 61000-4-3 (Radiated RFI)  
EN 61000-4-4 (Burst)  
EN 61000-4-5 (Surge)  
EN 61000-4-6 (Induced RFI)  
EN 61000-4-8 (Magnetic field)

### Safety

UL 62368-1

### Vibration

IEC 60068-2-6

### Shock

IEC 60068-2-27

### Free Fall

IEC 60068-2-31

### Industrial

EN 50121-4

### Power Substation

IEC 61850-3/IEEE 1613

## + Power

### Input

#### Dual Power

FTR: (Terminal Block)

24VDC to 48VDC (Nominal)

18 - 60VDC (Operational)

FWR: (Terminal Block)

100 - 250VDC or 100 - 240VAC (Nominal)

88 - 300VDC or 88 - 264VAC (Operational)

RCR: (AC Inlet)

100 - 240VAC

#### Single Power

FWS: (Terminal Block)

100 - 250VDC or 100 - 240VAC (Nominal)

88 - 300VDC or 88 - 264VAC (Operational)

RCS: (AC Inlet)

100 - 240VAC

#### Power Consumption

50W max.

#### Protection

Reverse Polarity Protection

## + Warranty

### Length

Limited Lifetime

### Details

[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included

### Device

Ethernet Switch

### Cables

1 Console Cable

### Installation

Mounting brackets, screws

### Documentation


Quick Install Guide

### Power

1 AC Power Cord (RCS models)


2 AC Power Cord (RCR models)

# Dimensions

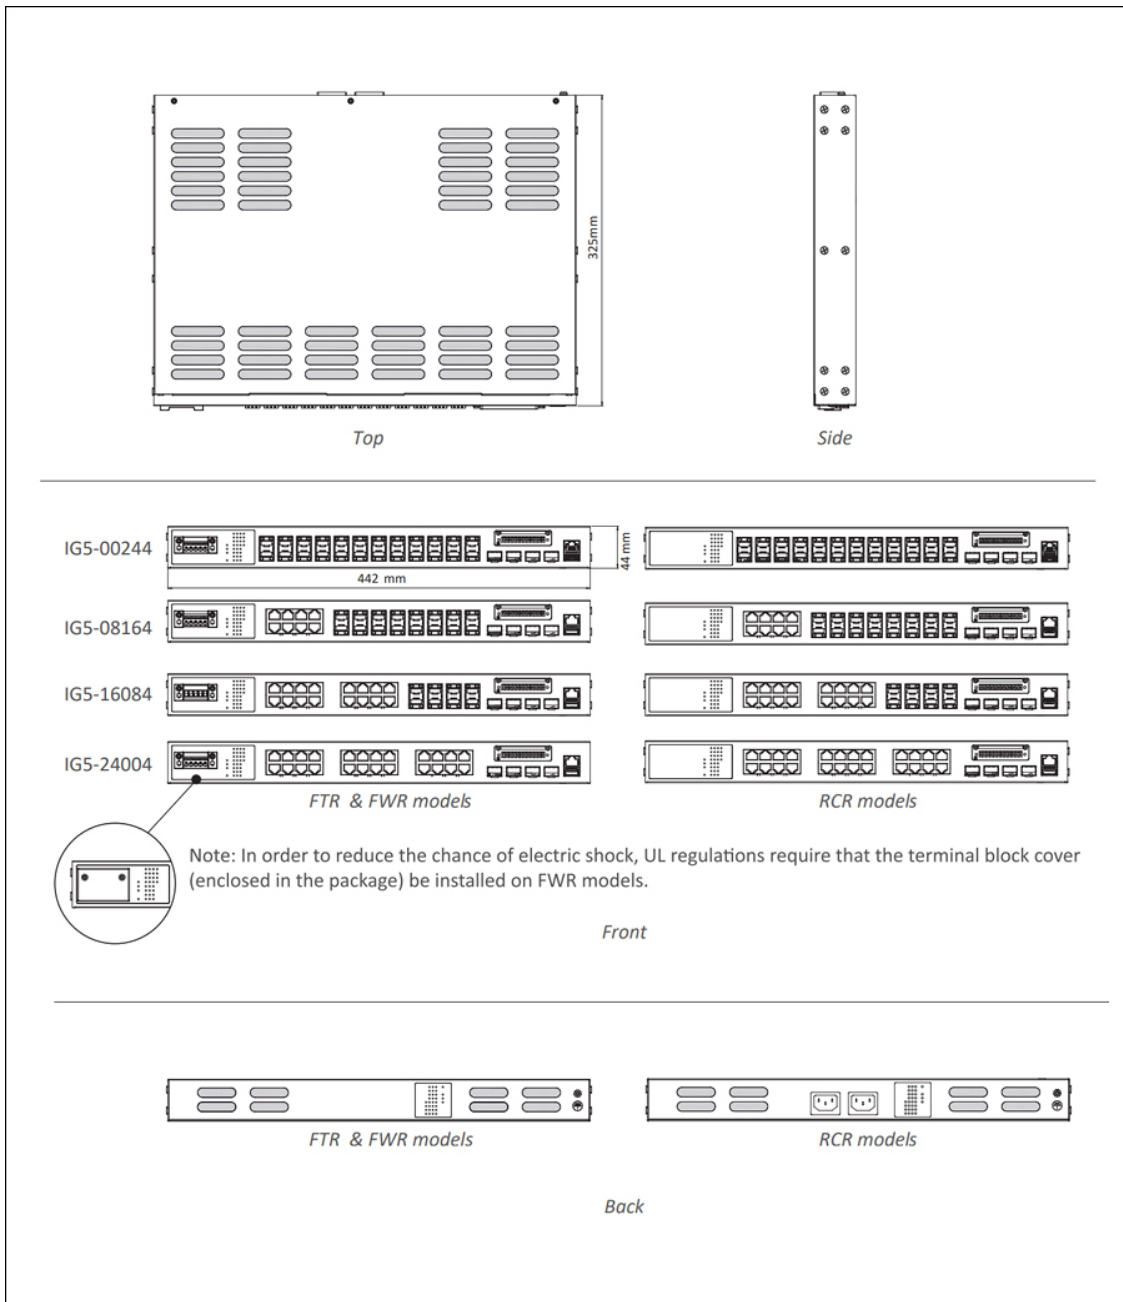




# Application

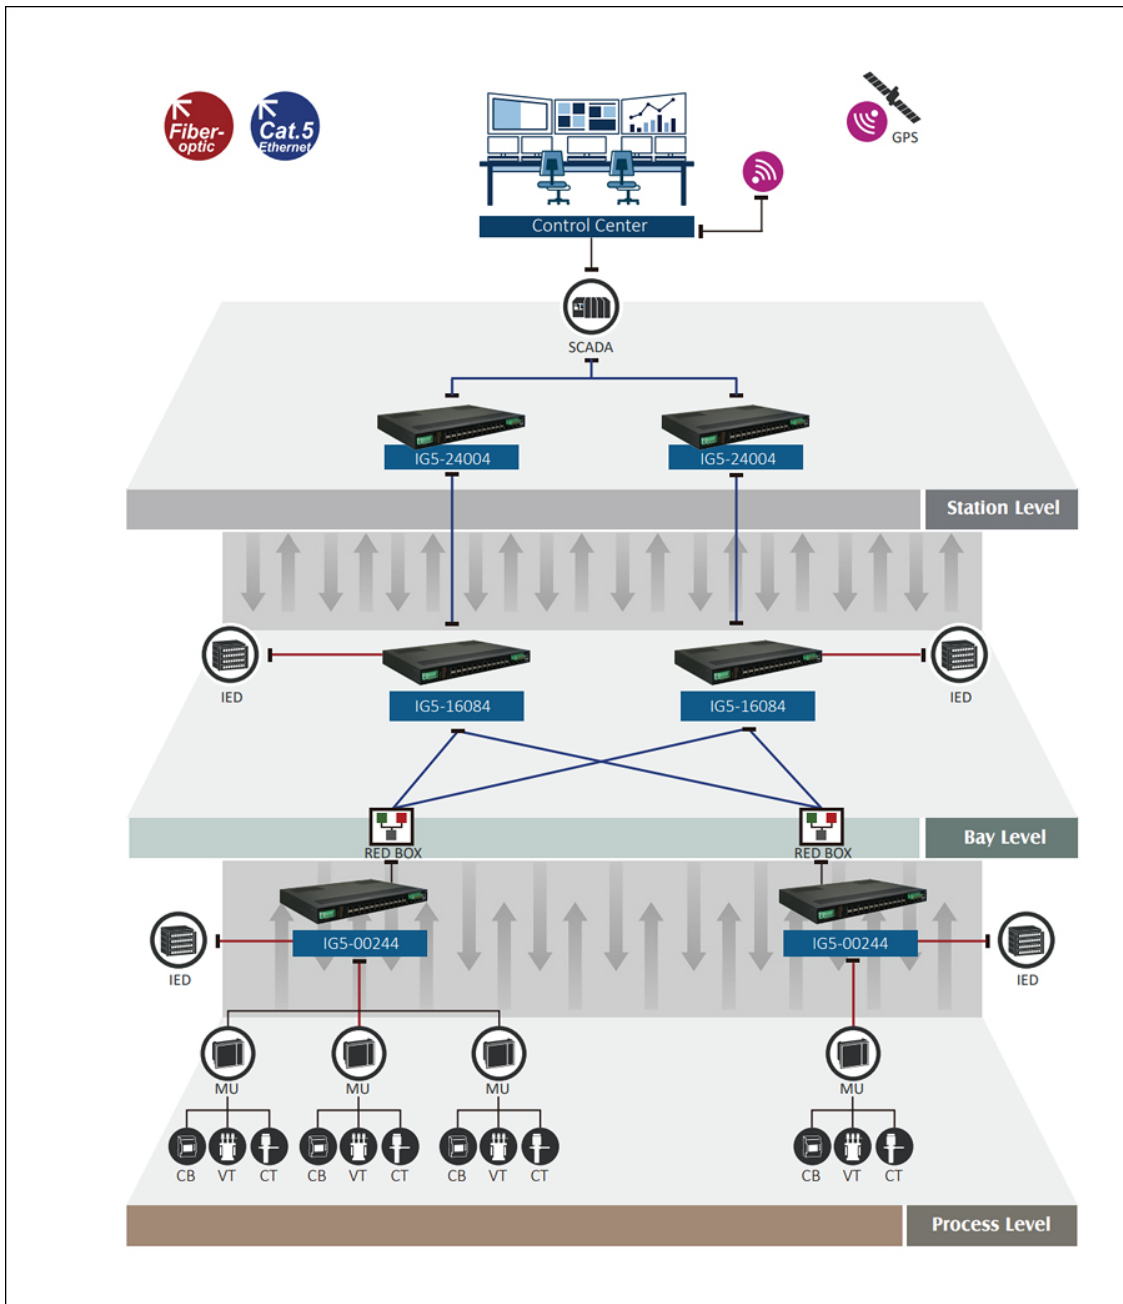

# Software

Network Management [eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

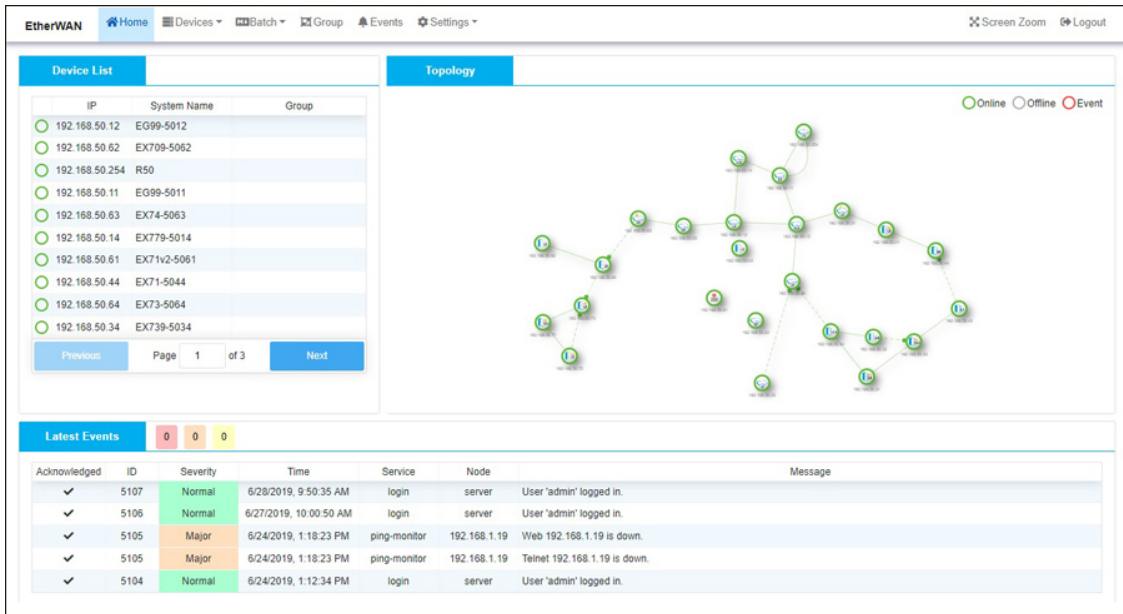

**Device List**


IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

**Topology**

Legend: ● Online ○ Offline ○ Event

**Latest Events**

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

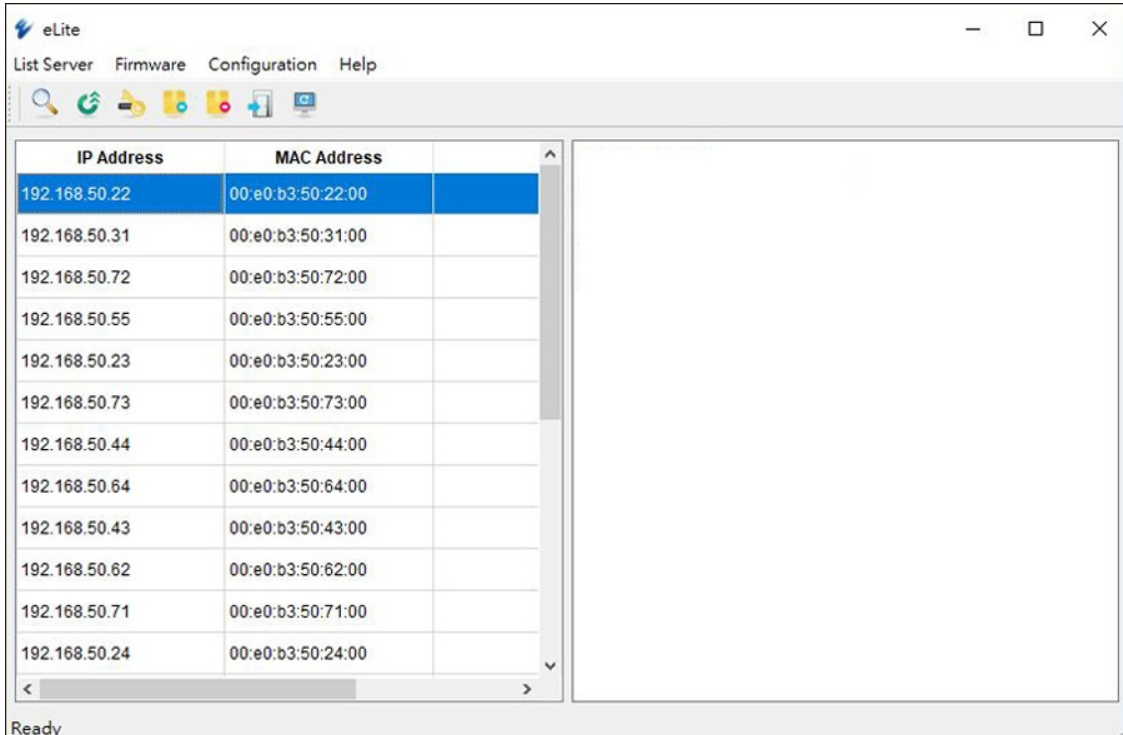

**eLite**

List Server Firmware Configuration Help

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ready

## Ordering Info

### + Model

IG5-24004YYY	24-port 10/100/1000BASE-T(X) + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-16084YYY	16-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-08164YYY	8-port 10/100/1000BASE-T(X) + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-00244YYY	24-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

### + Power Input & Operation Temp. (YYY)

FTR	24VDC to 48VDC Redundant (Terminal Block), Hardened Grade (-40 to 75°C)
FWR	88-300VDC or 100-240VAC Redundant (Terminal Block), Hardened Grade (-40 to 75°C)
RCR	100-240VAC Redundant (AC Inlet), Hardened Grade (-40 to 75°C)
FWS	88-300VDC or 100-240VAC (Terminal Block), Hardened Grade (-40 to 75°C)
RCS	100-240VAC (AC Inlet), Hardened Grade (-40 to 75°C)

### + Accessories

Part Number	Speed Info	Mode	Distance	Operating Temperature	Wavelength	DDM
EX-0155NSP-MB2L-A	100Mbps	Multi	2km	-40 to 85°C	1310nm	-
SFPMIS20M	100Mbps	Single	20km	-40 to 85°C	1310nm	✓
SFPGIM5AM	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✓
SFPGIM02M	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✓
SFPGIS10M	1000Mbps	Single	10km	-40 to 85°C	1310nm	✓
SFPTIM3AM	10Gbps	Multi	300m	-40 to 85°C	850nm	✓
SFPTIM3AM	10Gbps	Single	10km	-40 to 85°C	1310nm	✓

### + For more SFP, please visit website:

Hardened 100BASE SFP Modules	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>
Hardened Gigabit SFP Modules	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>
Hardened 10G SFP+ Modules	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>
DIN-Rail Power Supplies	<a href="http://www.etherwan.com/products/din-rail-power-supply">www.etherwan.com/products/din-rail-power-supply</a>



© EtherWAN Systems, Inc. All rights reserved. 20240607

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.