


IG5 Rack Series

IEC 61850-3/IEEE 1613 Lite L3 Hardened Managed 24-port Gigabit and 4-port 1G/10G SFP+ Ethernet Switch

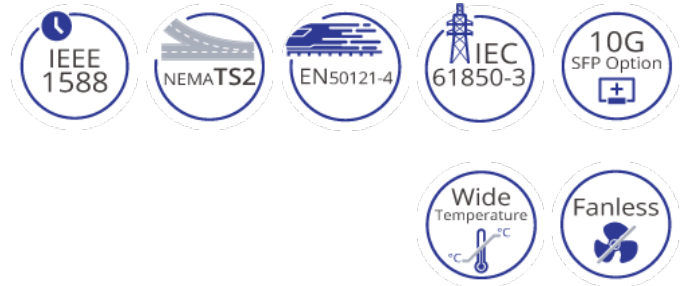

Overview

EtherWAN's InfraGreEn IG5 Rack series managed switching platform that combines the advantages of Layer 3 routing protocols with robust management features and enhanced specifications. With support for static routing, Routing Information Protocol (RIP) v1/v2, OSPF and Virtual Router Redundancy Protocol (VRRP), these switches deliver outstanding flexibility and security in a high performance and cost-effective solution.

The IG5 Rack series providing effective modularity through a wide range of port combination options. Supports full 28 ports gigabit transmission, and supports SFP+ to achieve 10G speed. Mountable on a 1U rack, equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption, promote stronger communication networks.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ High Bandwidth and Versatility

24 full gigabit ports for high bandwidth connections
4 x 1G/10G SFP+ uplink ports for fiber connections
128 Gbps full duplex switching capacity
Variant of optical and electrical port interface options

+ Time Stamped Supported

IEEE 1588v2
- Available in all ports
- Hardware-based time stamping
- Operation as transparent clock

+ Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
Redundancy with VRRPv2
Reduces amount of broadcast traffic

+ Flexible Rack Cabinet Installation

Dual LED Panel design, support rear and front display
Concise communication status display
Considerable ease of cabling management

Features

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware Upgrade
Configuration Backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) Synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3
Modbus

+ Security

MAC Address Filtering
Enable/Disable Port
Storm Control
System Logging
IEEE 802.1x LAN Access Control
Remote Authentication through RADIUS and TACACS+
Complex Password Support
Multi-user Login and Privileged Access Management
SSH for CLI and Telnet Security
SSL and HTTPS for Web Security
ACL (Access Control List, up to 4096 Entries)

+ Layer 2 Features

Auto-negotiation for Port Speed and Duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs

IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRPv2

+ Quality of Service (QoS)

Priority Queues: 8 Queues Per Port
Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode
Rate Limiting (Ingress/Egress)

+ Software Properties and Performance

Switching Fabric
128Gbps

Forwarding Rate
95.23Mpps

Max VLANs
256 (4096 VID)

Jumbo Frame Size
9KB

MAC Table Size
16K

Packet Buffer Memory
12M bits

Specifications

+ Interface

Ethernet

10/100/1000BASE-T(X): 0, 8, 16 or 24 ports

100/1000BASE SFP: 0, 8, 16 or 24 ports

1G/10G SFP+: 4 ports

Console

1 x RJ45

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;
Max input current: 8mA

Dry Contact: Logic Level 1-Close to GND; Logic
Level 0-Open

Alarm Contact

2 x Relay output, current capacity
0.6A/30VDC

LED Indicators

Per Unit: Power 1, (Single Power models)

Power 2 (Dual Power models) (Green)

Per Port: Link/Activity (Green)

Per Port: Alarm (Red)

+ Physical

Casing Material

Metal

IP Rating

IP40

Dimensions

442 x 325 x 44mm (W x D x H)

17.4" x 12.8" x 1.73"

Weight

4.6kg (10.14lbs) / 4.0kg (8.82lbs)

Installation Type

Rack mounting

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

(-40°C to 85°C for IEC 60068-2-2 Environmental 16
hours)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

446,556 hours

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3ae 10Gigabit Ethernet
IEEE 802.3ad link aggregation control
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x full duplex and flow control
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.1ab LLDP

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10Gbps

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory

2Gb DDR3 SDRAM

Flash Storage

1Gb

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A
VCCI Class A
EN 61000-6-4

EMS

EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety

UL 62368-1

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

IEC 60068-2-31

Industrial

EN 50121-4

Power Substation

IEC 61850-3/IEEE 1613

+ Power

Input

Dual Power

FTR: (Terminal Block)

24VDC to 48VDC (Nominal)

18 - 60VDC (Operational)

FWR: (Terminal Block)

100 - 250VDC or 100 - 240VAC (Nominal)

88 - 300VDC or 88 - 264VAC (Operational)

RCR: (AC Inlet)

100 - 240VAC

Single Power

FWS: (Terminal Block)

100 - 250VDC or 100 - 240VAC (Nominal)

88 - 300VDC or 88 - 264VAC (Operational)

RCS: (AC Inlet)

100 - 240VAC

Power Consumption

50W max.

Protection

Reverse Polarity Protection

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch

Cables

1 Console Cable

Installation

Mounting brackets, screws

Documentation


Quick Install Guide

Power


1 AC Power Cord (RCS models)

2 AC Power Cord (RCR models)

Dimensions

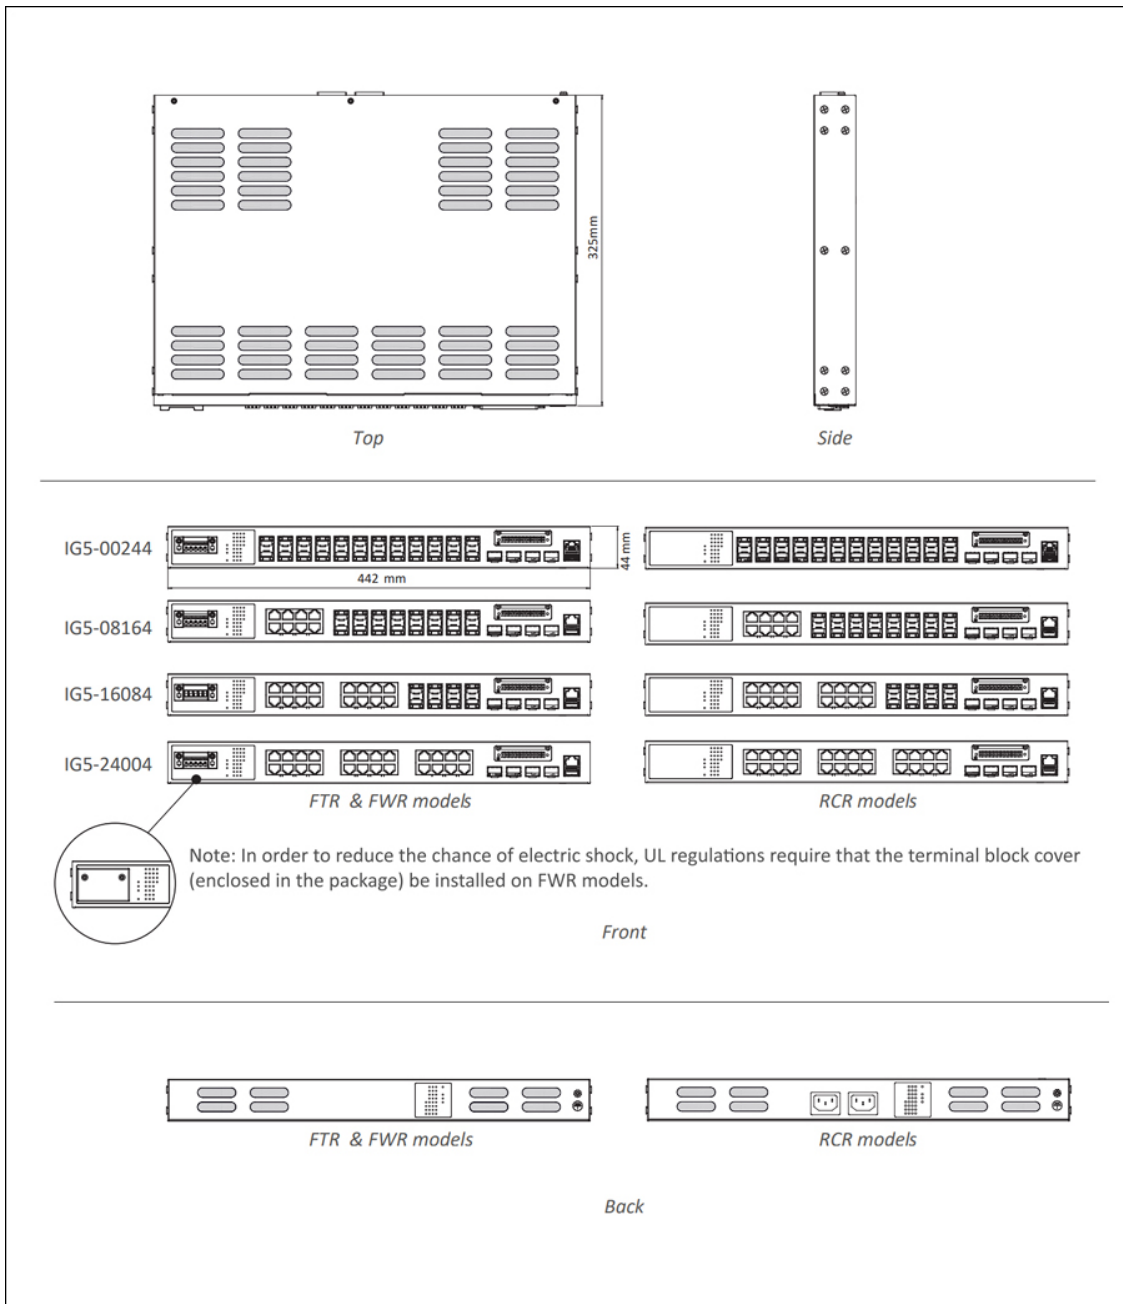


Application

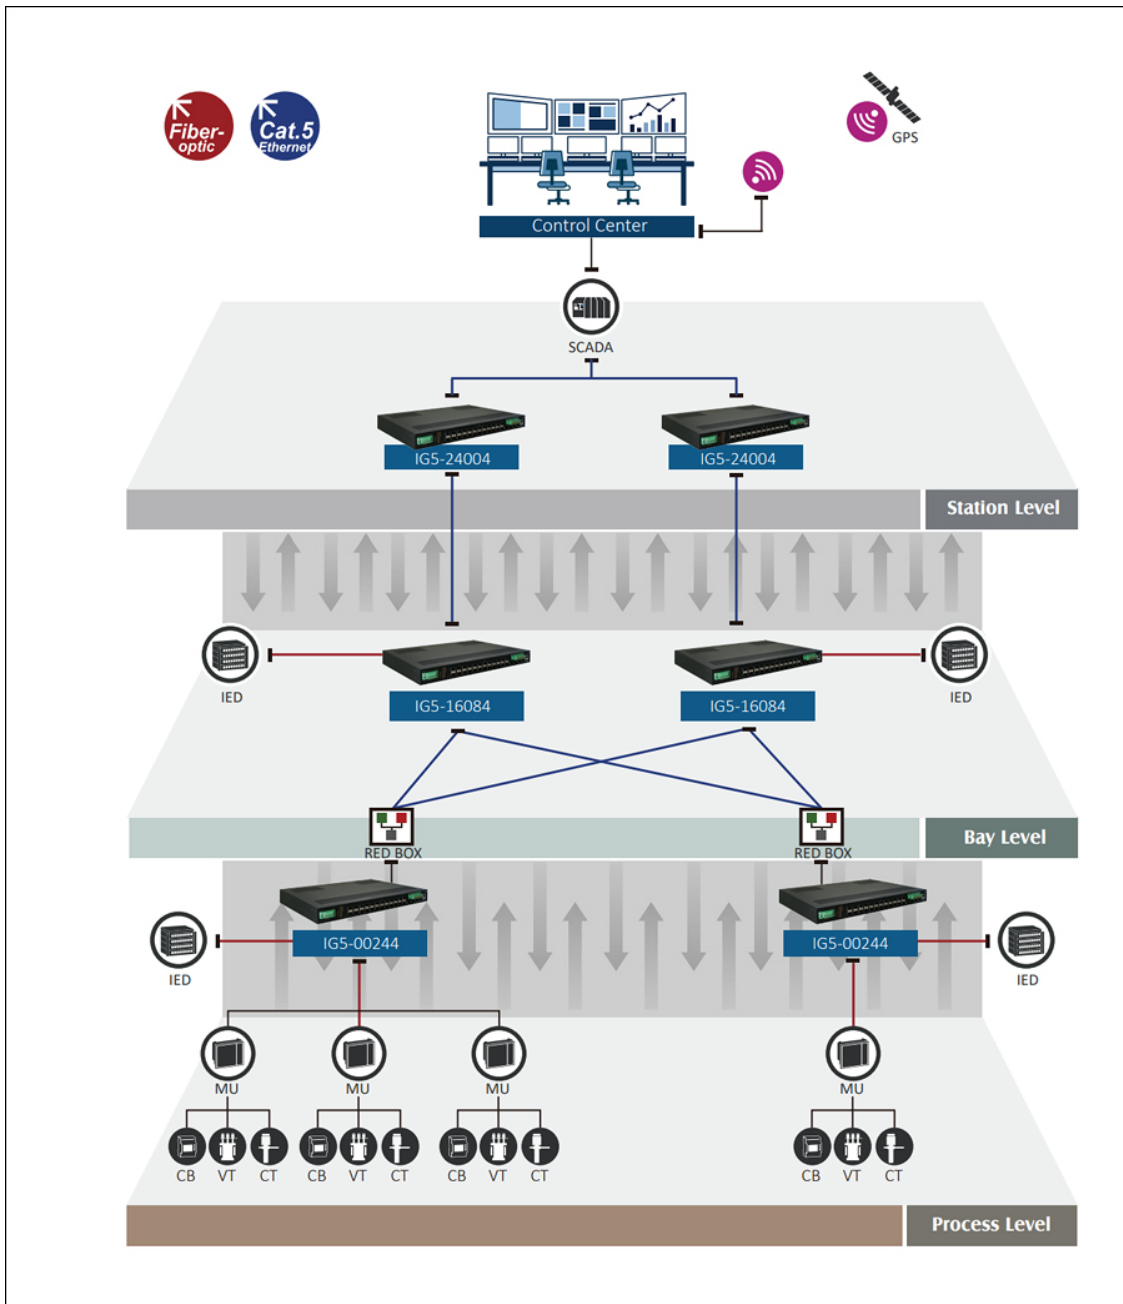

Software

Network Management [eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

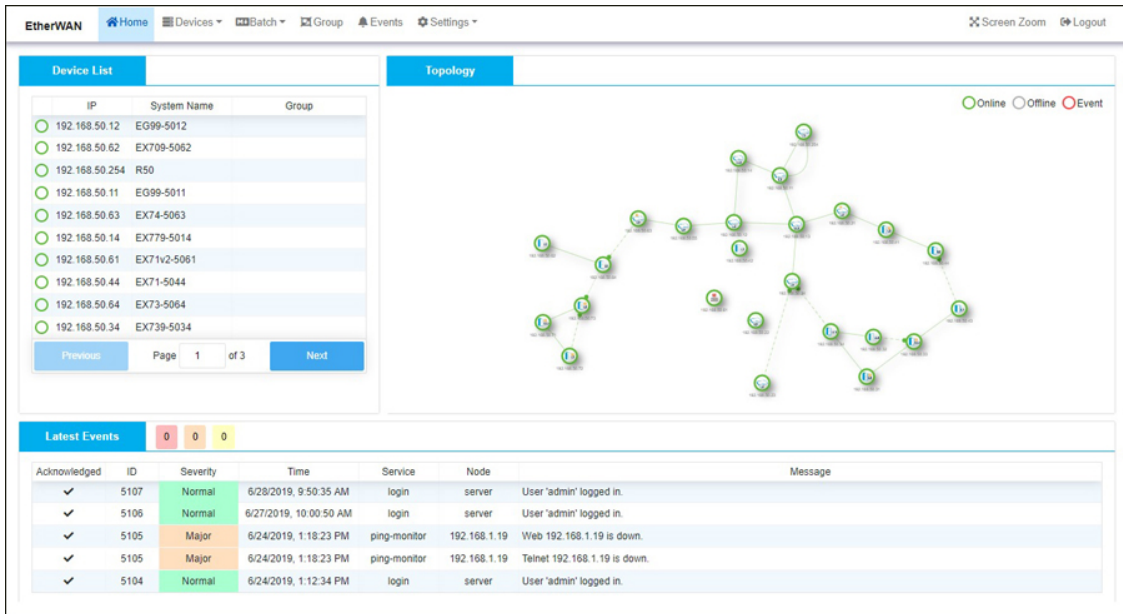

Device List


IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Topology

Legend: ● Online ○ Offline ○ Event

Latest Events

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

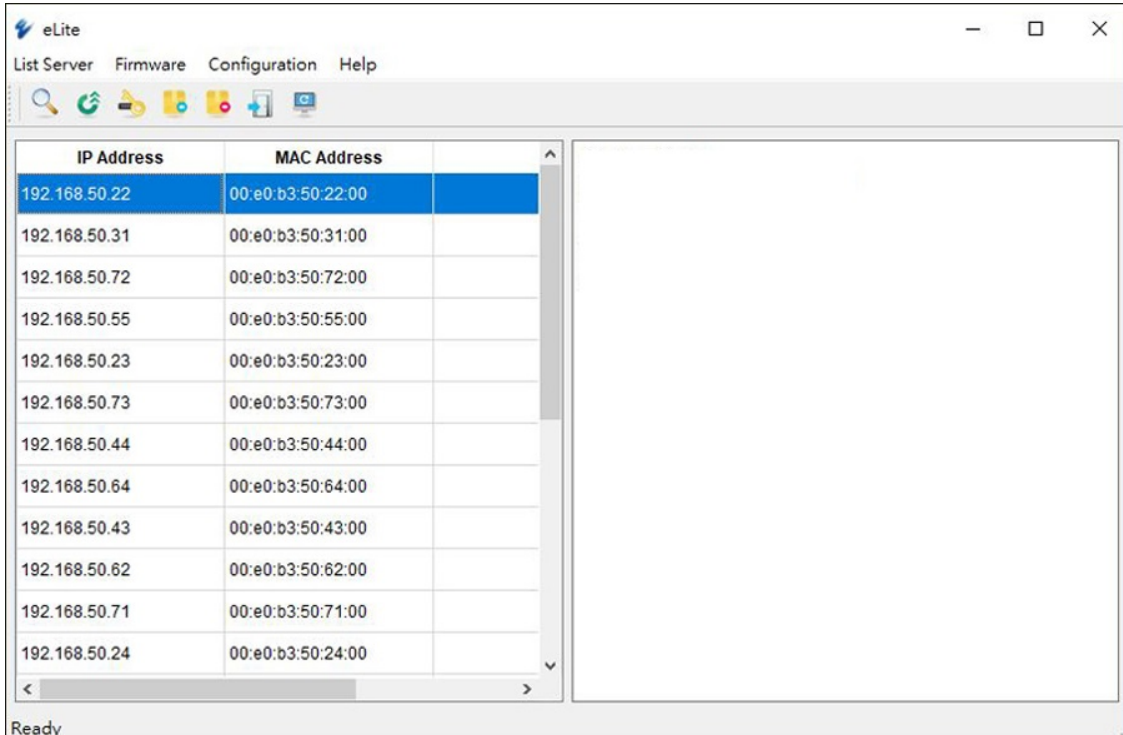

eLite

List Server Firmware Configuration Help

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ready

Ordering Info

+ Model

IG5-24004YYY	24-port 10/100/1000BASE-T(X) + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-16084YYY	16-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-08164YYY	8-port 10/100/1000BASE-T(X) + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-00244YYY	24-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

+ Power Input & Operation Temp. (YYY)

FTR	24VDC to 48VDC Redundant (Terminal Block), Hardened Grade (-40 to 75°C)
FWR	88-300VDC or 100-240VAC Redundant (Terminal Block), Hardened Grade (-40 to 75°C)
RCR	100-240VAC Redundant (AC Inlet), Hardened Grade (-40 to 75°C)
FWS	88-300VDC or 100-240VAC (Terminal Block), Hardened Grade (-40 to 75°C)
RCS	100-240VAC (AC Inlet), Hardened Grade (-40 to 75°C)

+ Accessories

Part Number	Speed Info	Mode	Distance	Operating Temperature	Wavelength	DDM
EX-0155NSP-MB2L-A	100Mbps	Multi	2km	-40 to 85°C	1310nm	-
SFPMIS20M	100Mbps	Single	20km	-40 to 85°C	1310nm	✓
SFPGIM5AM	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✓
SFPGIM02M	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✓
SFPGIS10M	1000Mbps	Single	10km	-40 to 85°C	1310nm	✓
SFPTIM3AM	10Gbps	Multi	300m	-40 to 85°C	850nm	✓
SFPTIM3AM	10Gbps	Single	10km	-40 to 85°C	1310nm	✓

+ For more SFP, please visit website:

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened 10G SFP+ Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply



© EtherWAN Systems, Inc. All rights reserved. 20240607

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.