



migrate-ed9.hellosanta.tw/products/emc1600-series EMC1600 Series

EMC1600 Series

16-Bay Media Converter and Ethernet Extender Chassis





Overview

The EMC1600 is a 16-Bay chassis specifically designed to house and power selected EtherWAN Media Converters and Ethernet Extenders in a 19" rack enclosure.

The hot swappable design enables easy installation, product additions, and deletions of EtherWAN Media Converters and Ethernet Extenders without interrupting existing communications within the chassis. Each bay is electrically isolated from each other with fused over-current protection resulting in unprecedented reliability. The redundant internal power supplies provide both power redundancy and load sharing. Support for AC power input allows the EMC1600 to be used worldwide. With its solid metal enclosure, standard 19" rack-mount and two-unit height design, the EMC1600 is ideal for interconnecting disparate network media and extending Ethernet beyond its boundaries.

EtherWAN — "When Connectivity is Crucial."

Spotlight

Hot-Swappable

» The chassis system is capable of hot-swap installations of select EtherWAN media converter and Ethernet extender models

16-Bay Rackmount Chassis

» Powers up 16 devices with redundant power supply modules

Supports EtherWAN's Ethernet Extenders and Media Converters

» Supported media converter models include EL2321, EL2211, EL2315, EM120, EL100/EL200 and ED3501 series

Specifications

Power

- **Input**
 - 100-240VAC, 50-60Hz Internal Universal PSU
 -
 - **Power Consumption**
 - System: 5.4W Max
 -
 - **Protection**
 - Over Current Protection
-

Mechanical

- **Casing**
 - Metal Case
 -
- **Dimensions**
 - 440 x 276 x 90mm (W x D x H)
(17.32" x 10.87" x 3.54")
 - Standard 19" rack-mount size, two-unit-height
 -
- **Weight**
 - 6.8Kg (14.96lbs)
 -
- **Installation**
 - Rack mounting

Interface

- **LED Indicators**
 - Per Unit: Power Status (Power)
 -
 - **Relay Output**
 - 30VDC/0.6A
-


Environment

- **Operating Temperature**
 - 0 to 45°C (32 to 113°F)
 -
 - **Storage Temperature**
 - -10 to 70°C (14 to 158°F)
 -
 - **Ambient Relative Humidity**
 - 5% to 95% (non-condensing)
-


Regulatory Approvals

- **ISO**
 - Manufactured in an ISO 9001 facility
 -
 - **Safety**
 - UL 60950-1
 -
 - **Emission Compliances**
 - CE Mark Class A
 - FCC Part 15B Class A
-

Application

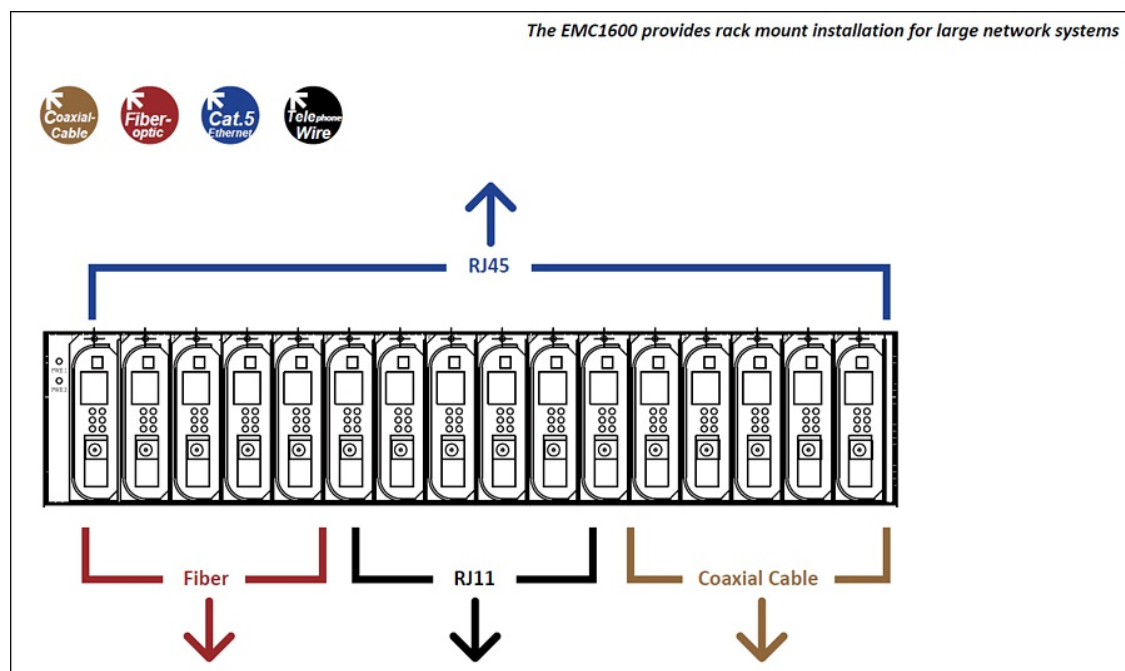

Dimensions

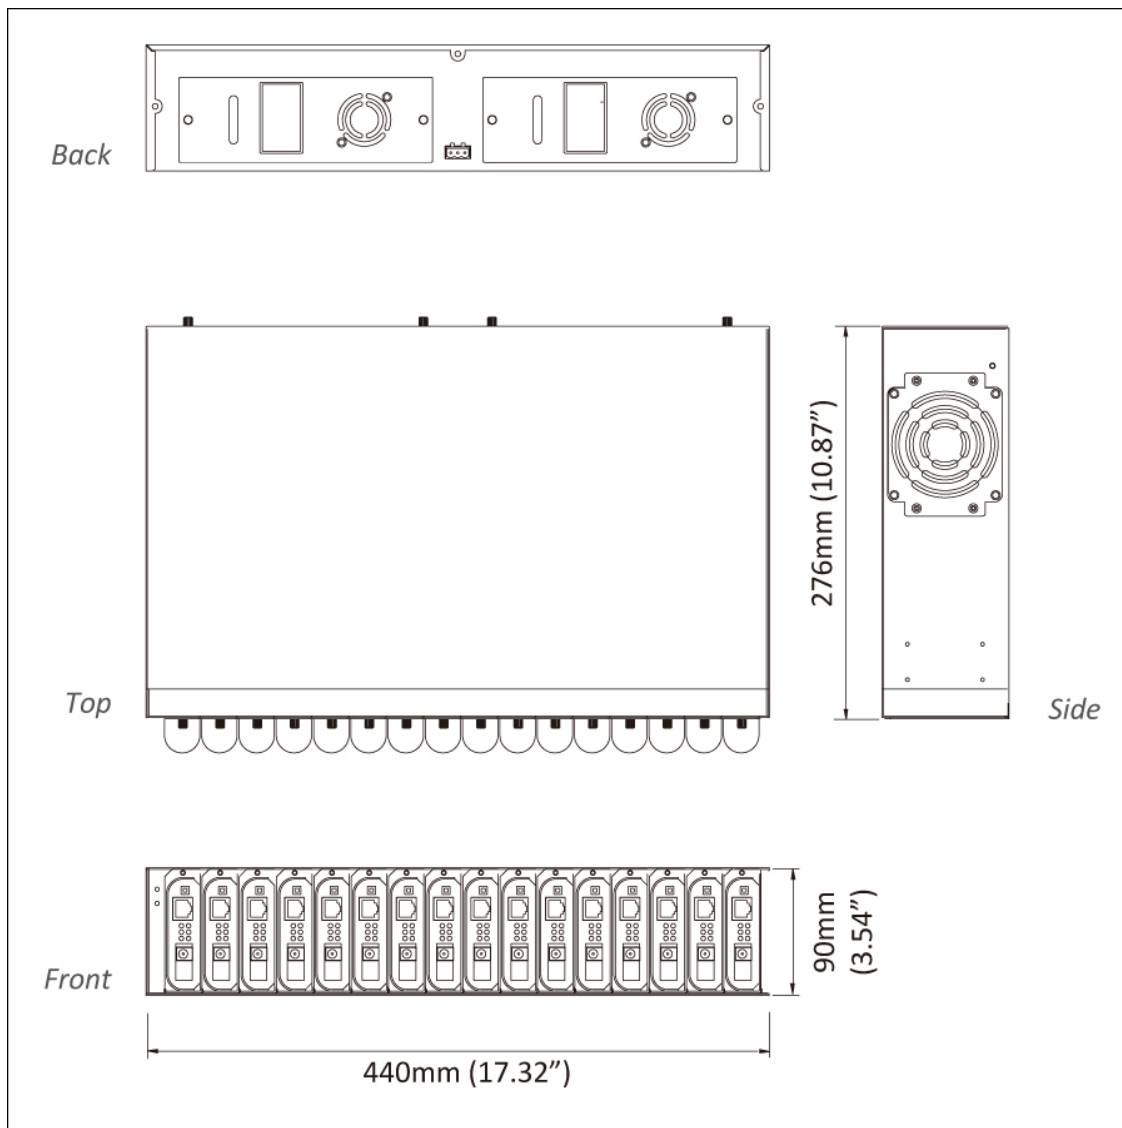

Ordering Info

Model

EMC1600 16-Bay Media Converter and Ethernet Extender Chassis, including 2 AC Power Supplies (EMC1600-RPSA)

EMC1600-RPSA Redundant AC Power Supply (84W) for EMC1600

EMC1600-RPSA2 Redundant AC Power Supply (108W) for EMC1600



© EtherWAN Systems, Inc. All rights reserved. 20220609

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.