

## EX27000 Series

IEC 61850-3/IEEE 1613 Managed 24-port 10/100BASE and 4-port Gigabit Ethernet Switch with SFP options



## Overview

EtherWAN's EX27000 series provides an industrial-grade fully managed 28-port switching platform combining high performance switching backbone with robust and secure management features required for mission critical and industrial environments where sustained connectivity is crucial.

The EX27000 series is equipped with 24 fast Ethernet ports and 4 gigabit uplink ports with fixed fiber or SFP options. Industrial-grade allows for fan-less operation in high EMI and vibration environments with a temperature range from -10 to 60°C (14 to 140°F).

Users are able to access EX27000 management features such as port security, IGMP snooping, VLANs, GARP protocols, and LACP via web browser, Telnet, SNMP, RMON, TFTP, and RS-232 console interfaces.

EX27000 is also comply with IEC 61850-3 and IEEE 1613 certified for power substations and EN 50121-4 certified for railway applications, it can be mountable on a 1U rack, and is equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

Certified for applications in electric power substations and railway managements

» Compliant with IEC 61850-3 & IEEE 1613, and EN 50121-4 standards

### Redundant power inputs

» Supports AC Inlet and DC Terminal Block

### SFP Options

» Supports a list of SFP modules, and the user can flexibly configure each port via SFP module management

### Fan-less Metal Casing

» For easy maintenance with -10 to 60°C (14 to 140°F) wide operating temperature

## Features

### Management

- » Interface
    - CLI, Telnet and Web Browser
    - SNMP v1/v2c/v3
  - » Firmware and configuration upgrade and backup via TFTP
  - » Supports DHCP Server/Client
  - » RMON (Remote Monitoring): group 1, 2, 3, 9
  - » Port mirroring: TX/RX and both
  - » NTP (Network Time Protocol) time synchronization
  - » IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
  - » IPv4/IPv6
- 

### Security

- » MAC Address by port security
  - » Enable/Disable port
  - » Storm control (Broadcast and multicast types)
  - » IEEE 802.1x LAN access control
  - » Remote authentication through RADIUS and TACAS+
  - » SSH for CLI and Telnet security
  - » SSL for web security
  - » ACL
  - » Multi-level user account/password against unauthorized configuration
- 

### Quality of Service (QoS)

- » Priority Queues: 8 queues per port
  - » Traffic classification based on IEEE 802.1p CoS, DSCP, WRR (Weighted Round Robin) and strict mode
  - » Rate Limiting (Ingress/Egress)
- 

### Layer 2 Features

- » Auto-negotiation for port speed and duplex mode
- » Flow Control
  - IEEE 802.3x full duplex mode

- Back-Pressure half duplex mode
  - » Redundant Protocol
    - IEEE 802.1D Spanning Tree Protocol (STP)
    - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
    - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
    - EtherWAN's Alpha-Ring network fault recovery (<15ms) and Alpha-Chain
  - » VLANs
    - Port-based VLANs
    - IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
    - GVRP (GARP VLAN Registration Protocol)
    - GMRP (GARP Multicast Registration Protocol)
  - » Link Aggregation
    - Static Trunk (8 groups, support MAC base)
    - IEEE 802.3ad Link Aggregation Control Protocol
  - » IGMP Snooping
    - IGMP Snooping v1/v2/v3
- 

## Performance

- » Switching Capability: 12.8Gbps
  - » Jumbo Frame: 9K bytes
-

# Specifications

## Technology

### Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-SX/1000BASE-LX
- IEEE 802.3x Full duplex and flow control
- IEEE 802.1p QoS
- IEEE 802.1Q Tag VLANs
- IEEE 802.1w RSTP
- IEEE 802.1x Port-based Network Access Control

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

### Packet Buffer Memory

- 12M bits

### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

### Address Table Size

- 16K MAC addresses
- 

## Power

### Input

- (T):  $\pm 48$ VDC Internal Universal PSU
- (W): 88-300VDC or 100-240VAC Internal Universal PSU

- (C): 100-240VAC, 50-60Hz Internal Universal PSU

### **Power Consumption**

- For models with all copper ports: EX27604 Series: 21.9W@230VAC
  - For models with all fiber ports: EX27064 Series: 40.6W@230VAC
- 

## **Mechanical**

### **Casing**

- Metal Case
- IP30

### **Dimensions**

- Redundant Power:  
442 x 375 x 44mm (W x D x H)  
(17.4" x 14.7" x 1.73")
- Single Power:  
442 x 284 x 44.2mm (W x D x H)  
(17.4" x 11.1" x 1.74")

### **Weight**

- 5Kg (11lbs)

### **Installation**

- Rack mounting
- 

## **Interface**

### **Ethernet Port**

- 10/100BASE-TX: 0, 8, 16 or 24 ports
- 100BASE-FX: 0, 8, 16 or 24 ports
- Gigabit: 4 ports

### **Console Port**

- Port: One DB9 RS-232 port

### **Alarm Contact**

- One relay output with current 0.6A/30VDC

### LED Indicators

- Per Unit: Power, Alarm
  - Per Port: Link/Activity (Green)
  - Per SFP Port: Selected (Green)
- 

## Environment

### Operating Temperature

- -10 to 60°C (14 to 140°F)
- Tested @ -20 to 70°C (-4 to 158°F)

### Storage Temperature

- -40 to 85°C (-40 to 185°F)

### Ambient Relative Humidity

- 5% to 95% (non-condensing)
- 

## Regulatory Approvals

### ISO

- Manufactured in an ISO 9001 facility

### Safety

UL 62368

### EMI

FCC Part 15B Class A

EN 61000-6-4

### EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

- IEC 61000-4-10 (Oscillatory wave magnetic field test)
- IEC 61000-4-16 (Power frequency immunity test)

### Environmental Test Compliance

FED STD 101C Method 5007.1 (Free fall w/package)

IEC 60068-2-6 Fc (Vibration Resistance)

IEC 60068-2-27 Ea (Shock)


### Industrial Compliance

IEC 61850-3/IEEE 1613

EN 50121-4


---


## Application

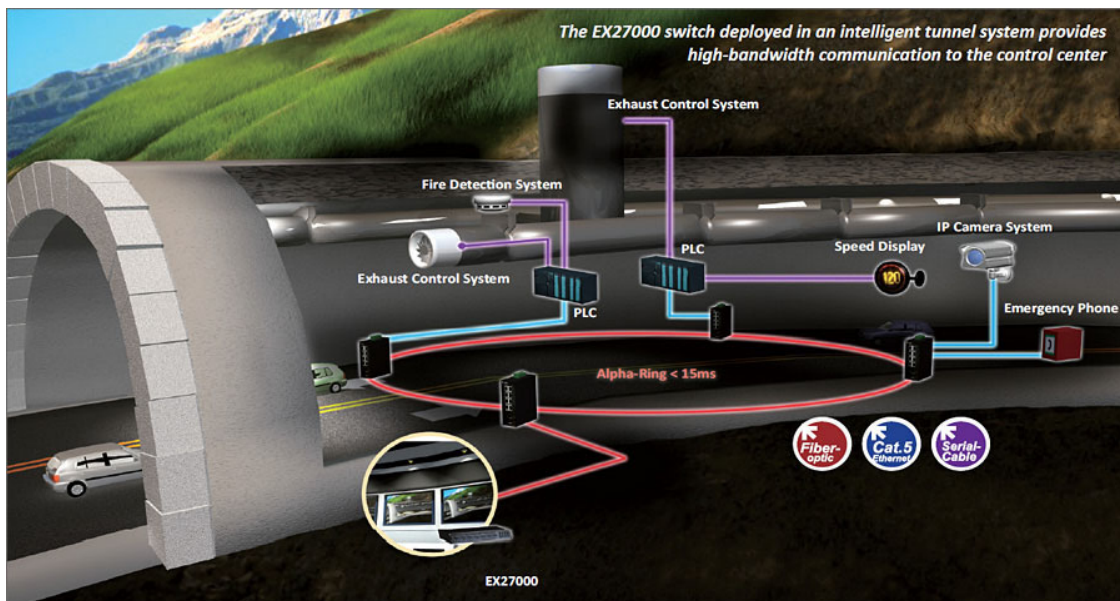



# Dimensions

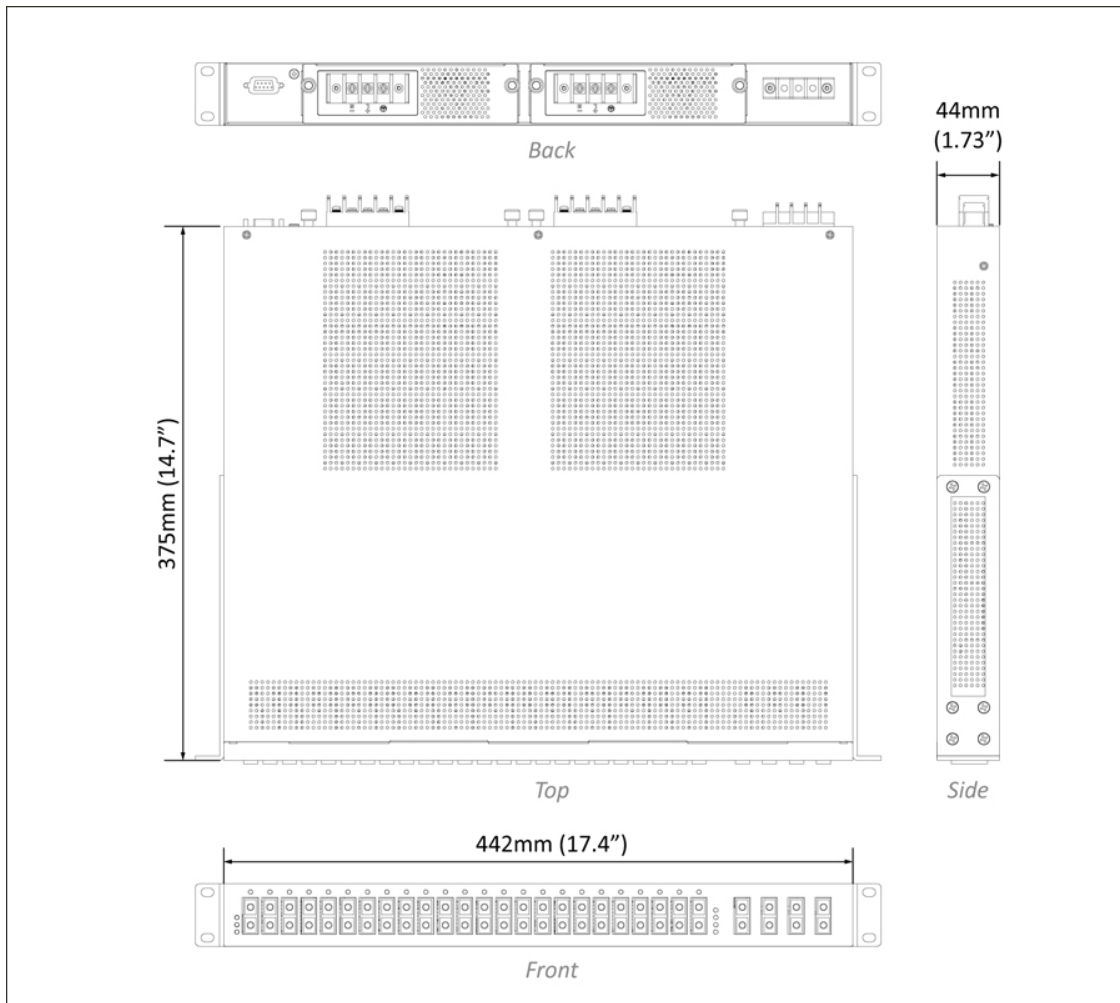

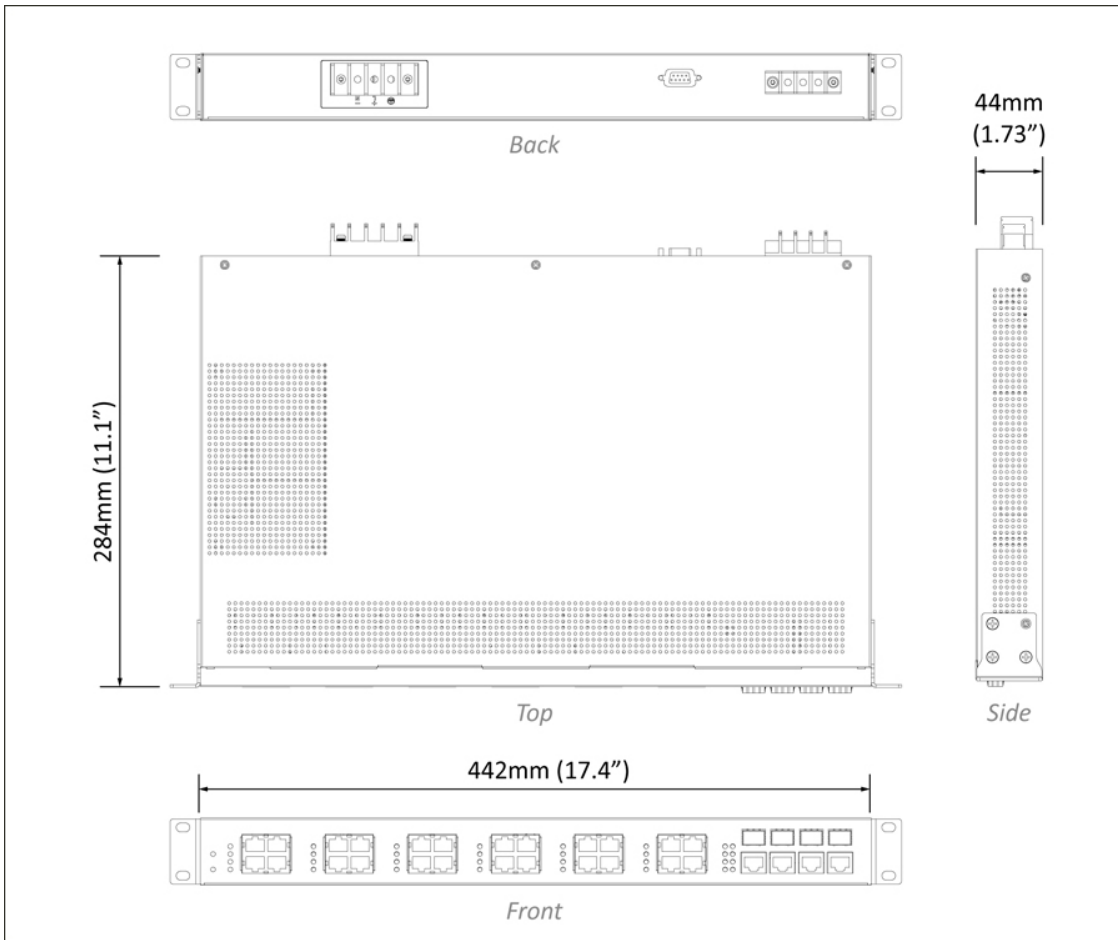

## Ordering Info

### Model

<b>EX27604-0XYZ</b>	24-port 10/100BASE-TX +4-port Gigabit Managed Ethernet Switch
<b>EX27424-WXYZ</b>	16-port 10/100BASE-TX +8-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX27244-WXYZ</b>	8-port 10/100BASE-TX +16-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX27064-WXYZ</b>	24-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX27064-V0VZ</b>	24-port 100BASE-SFP +4-port Gigabit SFP Combo Managed Ethernet Switch

\* Rack mounting kit included.

### 100FX Fiber Options (W)

<b>1</b>	Multi Mode (SC) - 2Km
<b>2</b>	Multi Mode (ST) - 2Km
<b>6</b>	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
<b>7</b>	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
<b>8</b>	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
<b>9</b>	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
<b>A</b>	Single Mode (SC) - 20Km
<b>P</b>	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>Q</b>	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>V</b>	SFP

### Number of Fixed Gigabit Fibers (X)

<b>0</b>	None
<b>4</b>	Four Gigabit Fiber Ports

### Gigabit Port Options (Y)

<b>3</b>	1000BASE-SX (SC) - 550m
----------	-------------------------

<b>4</b>	1000BASE-SX (SC) - 2Km
<b>A</b>	1000BASE-LX (SC) - 10Km
<b>B</b>	1000BASE-LX (SC) - 20Km
<b>R</b>	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>S</b>	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>V</b>	4-port 100/1000BASE SFP Combo with 10/100/1000BASE-TX

\* More Gigabit options also available upon request.

## Power Input Interface (Z)

<b>T</b>	±48VDC (Terminal Block)
<b>W</b>	88-300VDC or 100-240VAC (Terminal Block)
<b>C</b>	100-240VAC (AC Inlet)
<b>TR</b>	±48VDC Redundant (Terminal Block)
<b>WR</b>	88-300VDC or 100-240VAC Redundant (Terminal Block)
<b>CR</b>	100-240VAC Redundant (AC Inlet)

