

# EX73900X 系列

強固級網管型 12埠Gigabit +4埠1G/10G SFP+ 乙太網路交換器



## 產品亮點

### + High Bandwidth and Versatility

8 or 12 10/100/1000BASE-T(X) ports for high bandwidth connections  
Up to 4 dual-rate 1/10G SFP+ uplink ports for fiber connections  
Full capacity switching running at full duplex

### + Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)  
Fanless operation  
High impact, thermal shock, and electrical noise resistance

### + Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF support  
Redundancy with VRRP  
Reduces amount of broadcast traffic

### + Compliance

IEC 61850-3/IEEE 1613 certified for power substation  
NEMA TS2 rated  
UL certified for safety

### + Management/Security Features

Port control, SFTP  
Dying gasp feature provides SNMP trap upon power off  
Configure and monitor with eVue™ and eLite™

### + Support

Complimentary Technical Support  
Free Firmware Upgrades  
Limited Lifetime Warranty

## 產品介紹

EtherWAN's EX73900X series is a hardened DIN-rail mounted managed Ethernet switch platform. Equipped with up to 12 gigabit Ethernet and 4 dual-rate 10 gigabit SFP+ ports, the EX73900X series provides flexibility, speed, and reliability to support networks for urban infrastructure, transportation, security, power substations, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

## 產品特色

### + Interface

CLI, Telnet, Web GUI, SSH

### + Management

Firmware upgrade  
SFTP (Secured FTP) support  
Configuration backup  
DHCP Server/Client  
RMON (Remote Monitoring)  
Port Mirroring  
NTP (Network Time Protocol) synchronization  
LLDP (Link Layer Discovery Protocol)  
IPv4/IPv6  
SNMP v1/v2c/v3

### + Security

MAC Address filtering  
Enable/Disable port  
Storm Control  
System Logging  
IEEE 802.1x LAN Access Control  
Remote authentication through RADIUS and TACACS+  
Complex password support  
Multi-user login and privileged access management  
SSH for CLI and Telnet security  
TLS and HTTPS for Web security  
ACL (Access Control List, up to 4096 entries)  
Storm Detection Support

### + Quality of Service (QoS)

Priority Queues: 8 queues per port  
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode  
Rate Limiting (Ingress/Egress)

### + Layer 2 Features

**Auto-negotiation for port speed and duplex**  
Flow Control  
IEEE 802.3x full duplex mode  
Back-pressure half duplex mode

#### Redundant Protocols

IEEE 802.1D STP  
IEEE 802.1w RSTP  
IEEE 802.1s MSTP  
EtherWAN's Alpha-Ring network fault recovery

#### VLANs

IEEE 802.1Q Tag VLANs  
GVRP  
GMRP

#### Link Aggregation

Static Trunk (4 groups)  
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

### + Layer 3 Features

#### IP Packet Routing

Maximum number of routes in hardware: 64 entries  
Static Routing  
RIP v1/v2  
OSPF v2

#### Routing Redundancy

VRRP

### + Software Properties and Performance

#### Switching Fabric

104Gbps

#### Forwarding Rate

75.29Mpps

#### Max VLANs

256 (4096 VID)

#### Jumbo Frame Size

9KB

#### MAC Table Size

16K

#### Packet Buffer Memory

12M bits

## 產品規格

### + Interface

#### Ethernet

8 or 12 x 10/100/1000BASE-T(X)

2 or 4 x 1/10G SFP+

#### Console

1 x RJ45

#### Config Backup

1 x USB (Type A Connector)

#### Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;

max input current: 8mA

Dry Contact: Logic Level 1-Close to GND; Logic Level 0-Open

#### Alarm Contact

2 x Relay output, current capacity; 0.6A/30VDC

#### LED Indicators

Per Unit: Power 1, Power 2, Alarm

Per Port: Link/Activity

### + Technology

#### Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.1ab LLDP

IEEE 802.3az EEE

#### Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

14,881,000pps for 10Gbps

#### Processing Type

Store-and-forward

Auto-negotiation

Half-duplex back-pressure and full duplex flow control

Auto MDI/MDIX

System Memory  
2Gb DDR3 SDRAM

Flash Storage  
1Gb

## + Power

Input  
12-48VDC Redundant (Terminal block)

Power Consumption  
20W Max

Protection  
Reverse Polarity Protection

## + Physical

Casing Material  
Aluminum

IP Rating  
IP30

Dimensions  
72 x 140 x 170mm (W x D x H)  
2.8" x 5.5" x 6.7"

Weight  
1.4kg (3.08lbs)

Installation Type  
DIN-rail mounting

## + Environmental

Operating Temp.  
-40 to 75°C (-40 to 167°F)

Storage Temp.  
-45 to 85°C (-49 to 185°F)

Relative Humidity  
5% to 95% (non-condensing)

## + Regulatory

ISO  
Manufactured in ISO-9001 facility

EMI  
FCC Part 15B Class A  
VCCI Class A  
EN 61000-6-4  
EN 61000-3-2  
EN 61000-3-3

EMS  
EN 61000-6-2  
EN 61000-4-2 (ESD)  
EN 61000-4-3 (Radiated RFI)  
EN 61000-4-4 (Burst)  
EN 61000-4-5 (Surge)  
EN 61000-4-6 (Induced RFI)  
EN 61000-4-8 (Magnetic field)

Safety  
UL 61010

Traffic  
NEMA TS2

Rail  
EN 50121-4

Power Substation  
IEC 61850-3/IEEE 1613

Vibration  
IEC 60068-2-6

**Shock**  
IEC 60068-2-27

**Free Fall**  
FED STD 101C Method 5007.1

## + Warranty

**Length**  
Limited Lifetime

**Details**  
[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included


**Device**  
Ethernet switch

**Cables**  
1 Console cable


**Installation**  
Mounting brackets, screws

**Documentation**  
Quick install guide

## 產品尺寸圖

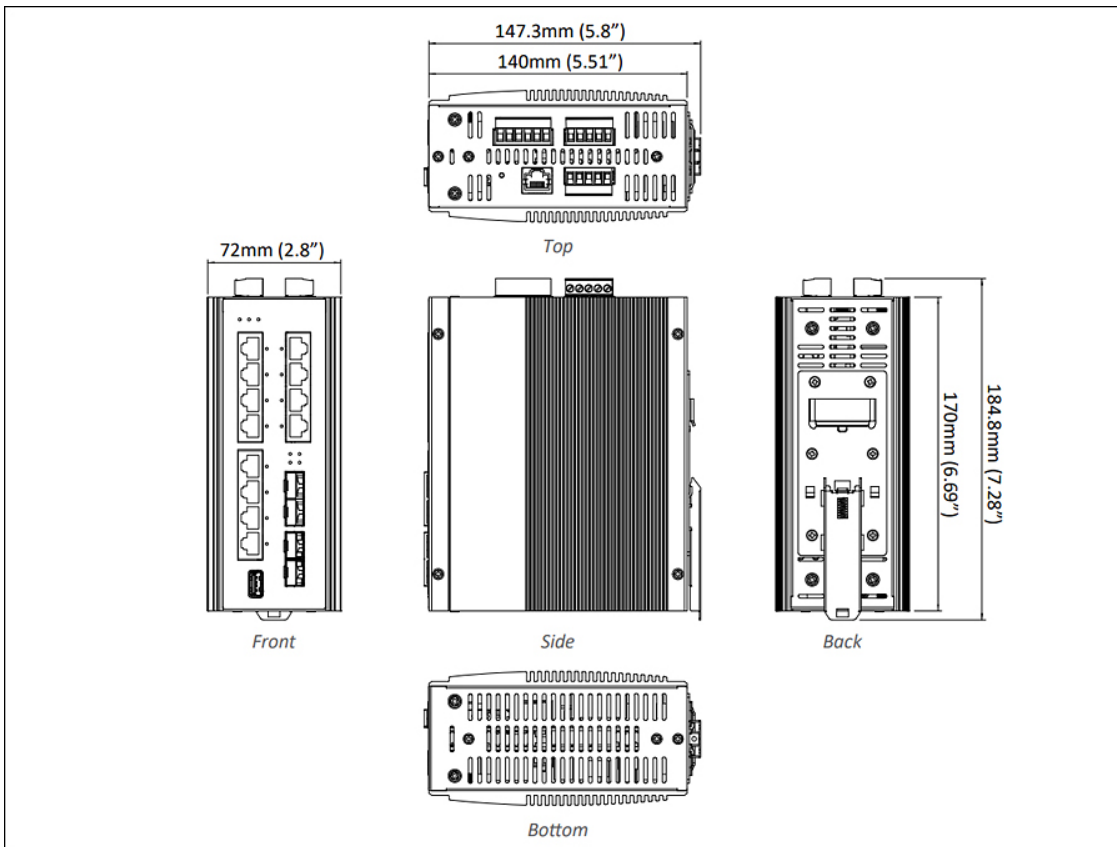


# 應用圖

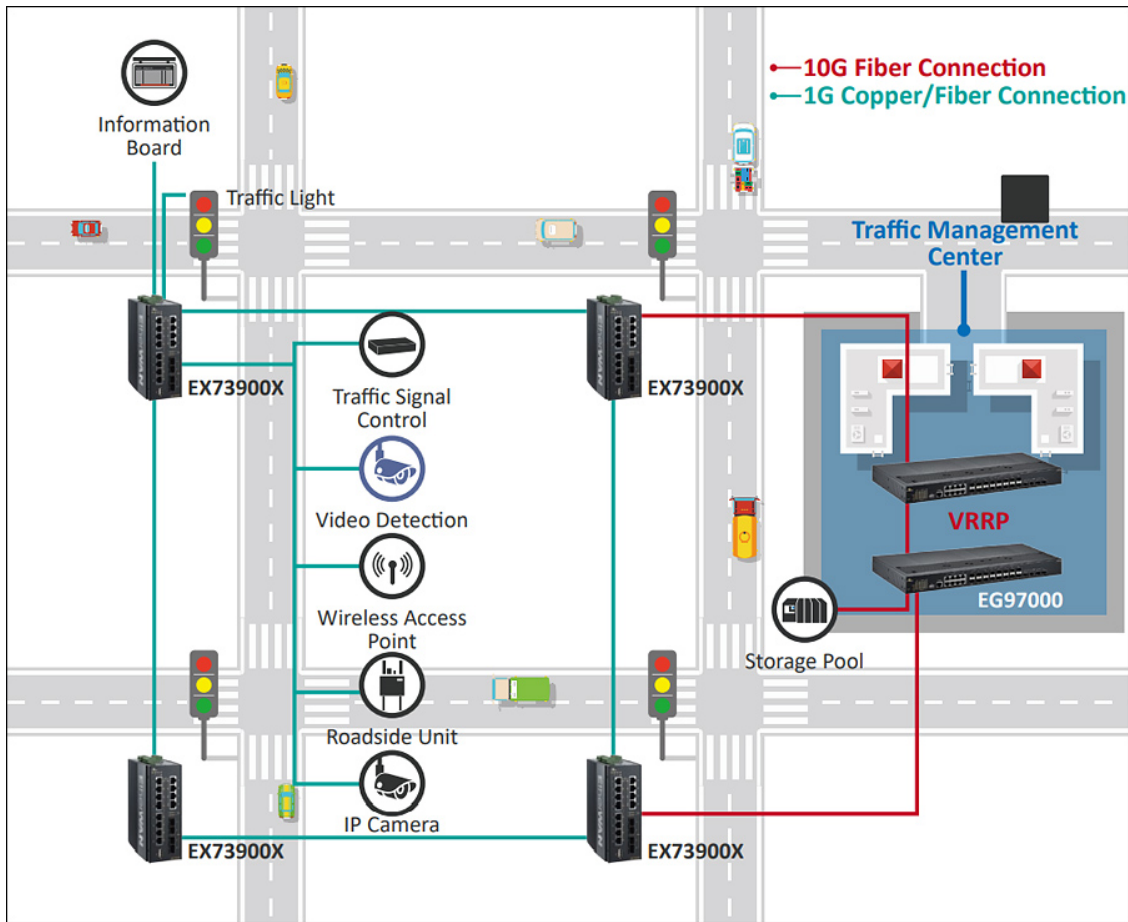

# 管理軟體

Network Management [eVue™ Network Configuration and Monitoring Tool](#)  
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

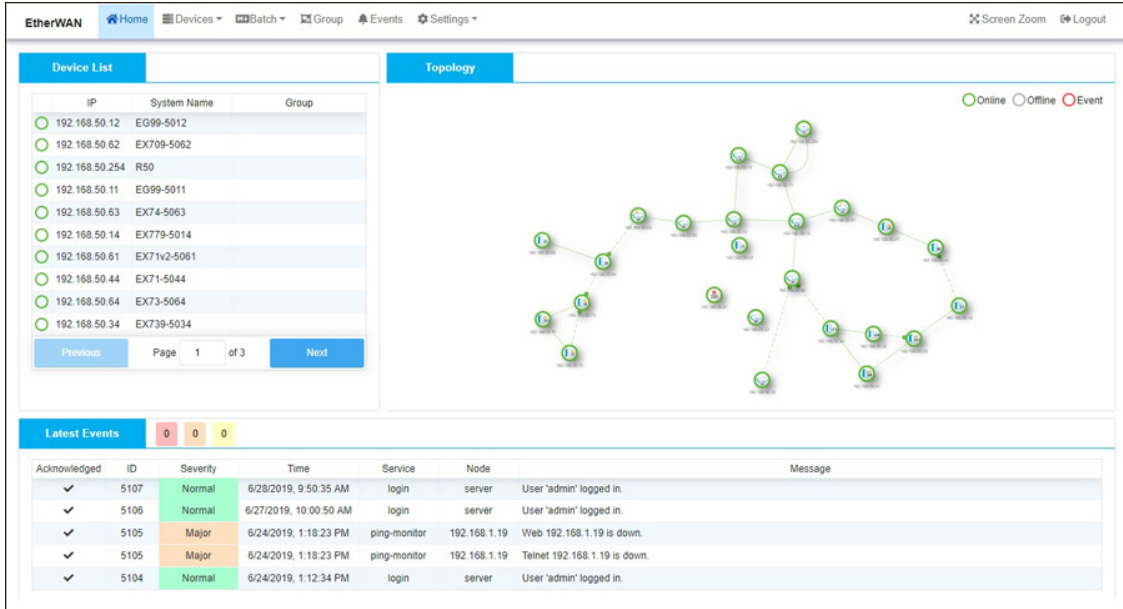

The screenshot shows the EtherWAN management interface. It features a navigation bar at the top with options like Home, Devices, Batch, Group, Events, and Settings. The main content area is divided into two sections: 'Device List' and 'Topology'.


**Device List:** A table listing network devices with columns for IP, System Name, and Group. The table contains 12 entries, all with green status indicators.

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

**Topology:** A network diagram showing interconnected devices represented by icons. A legend indicates Online (green circle), Offline (grey circle), and Event (red circle).

**Latest Events:** A table showing recent system events with columns for Acknowledged, ID, Severity, Time, Service, Node, and Message.

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

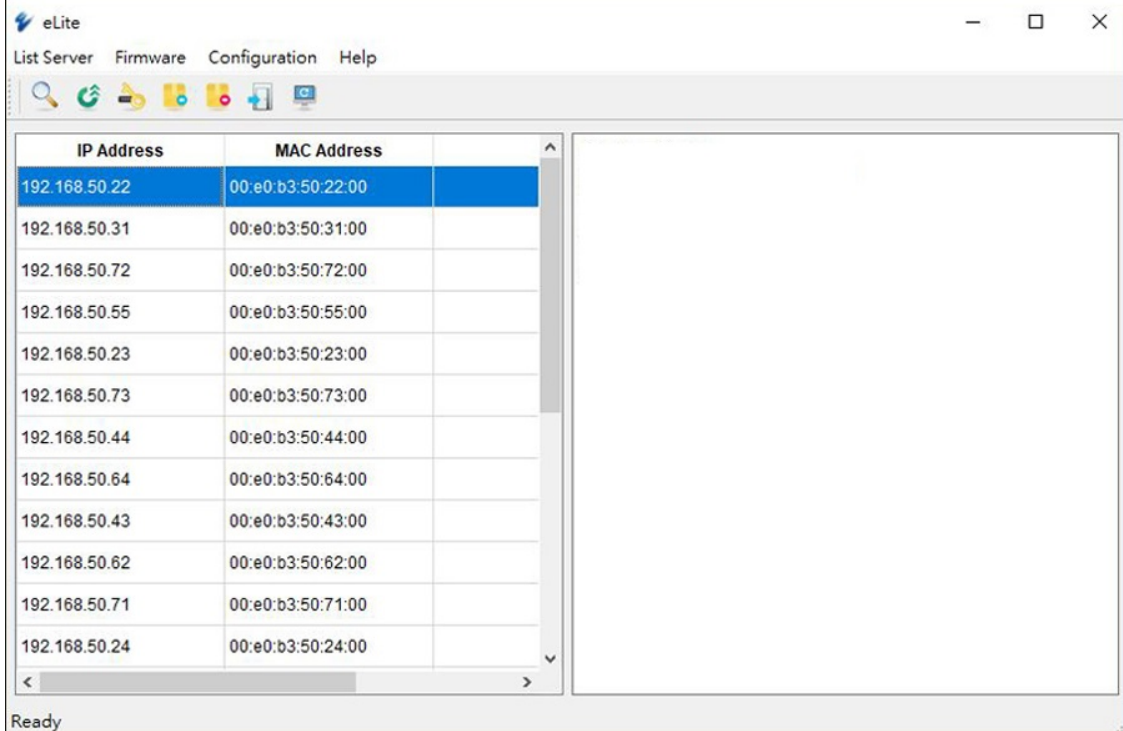

The screenshot shows the eLite network discovery tool interface. It has a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu is a toolbar with various icons. The main area displays a table of discovered devices.

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

The status bar at the bottom indicates 'Ready'.



## 訂購型號

### + Model

EX73934X-0VB 12-port 10/100/1000BASE-T(X) + 4-port 1/10G SFP+

EX73924X-0VB 8-port 10/100/1000BASE-T(X) + 4-port 1/10G SFP+

EX73922X-0VB 8-port 10/100/1000BASE-T(X) + 2-port 1/10G SFP+

### + Accessories

Hardened Gigabit & 10 Gigabit SFP Modules [www.etherwan.com/products/sfp-fiber-transceiver](http://www.etherwan.com/products/sfp-fiber-transceiver)

DIN-Rail Power Supplies [www.etherwan.com/products/din-rail-power-supply](http://www.etherwan.com/products/din-rail-power-supply) (\*)

\*Recommended Power Supply EX41-145046 Power Supply 45W 12VDC with Open Wire

