

EL200 系列

10/100BASE-TX-100BASE-BX WDM 光電轉換器



產品亮點

+ WDM接頭光電轉換器

支援多模、單模光纖規格，搭配WDM光纖接頭

+ 指撥開關設定

資料傳輸方式為Store-and-forward mode或者Converter mode，使用者可自行選用(出廠預設值為Store-and-forward mode)

是否啟動Link-fault-pass-through功能

是否啟動Ethernet埠Full-duplex或Half-duplex功能

是否啟動光纖埠Full-duplex或Half-duplex功能

+ 支援Link-Fault-Pass-Through (LFPT)

針對光電轉換器連線狀態提供持續的監控

當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路(RJ-45)埠之連線，以告知連線之設備網路連線已中斷

產品介紹

EL200系列具備1個10/100BASE-RJ45乙太網路連接埠搭配1個100BASE-FX光纖埠。支援熱插拔功能並可透過指撥式開關可彈性選擇Link-Fault-Pass-Through (LFPT)功能是否開啟。EL200系列專為WDM光纖應用解決方案所設計，可安裝於EtherWAN EMC1600/EMC400收容式機箱，最多可擴充達16組，適用於各種室內解決方案。

EtherWAN — "When Connectivity is Crucial."

產品規格

+ 介面

乙太網路埠
10/100BASE-TX: 1 port
100BASE-FX: 1 port

LED 指示燈號
Per Unit: Power
Per Port: 10/100TX: Link/Activity, Full duplex/Collision, Speed
Per Port 100FX: Link/Activity, Full duplex/Collision

+ 技術

標準
IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/FX
IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate
14,880pps for 10Mbps
148,810pps for 100Mbps

傳輸型式
Converter mode
Store-and-Forward
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

+ 電源

輸入電壓
12VDC

電力功耗
1.92W max. 0.16A@12VDC

+ 機構

機殼
Aluminum

尺寸
80.3 x 109.2 x 23.8mm (W x D x H)
3.16" x 4.30" x 0.94"

重量
0.15kg (0.33lbs)

安裝方式
Wall mounting, or in EMC1600 Chassis System

+ 環境

工作溫度
0 to 45°C (32 to 113°F)

儲存溫度
-10 to 70°C (-14 to 158°F)

工作濕度
5% to 95% (無凝結)

+ 通過認證

ISO
Manufactured in ISO-9001 facility

Safety
UL 62368-1

Emission Compliance
CE Mark Class A
FCC Part 15B Class A
VCCI Class A

+ 保固

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy


+ What's Included

Device
Media Converter


Power
12VDC Power Adapter

Documentation
Quick Install Guide

產品應用圖

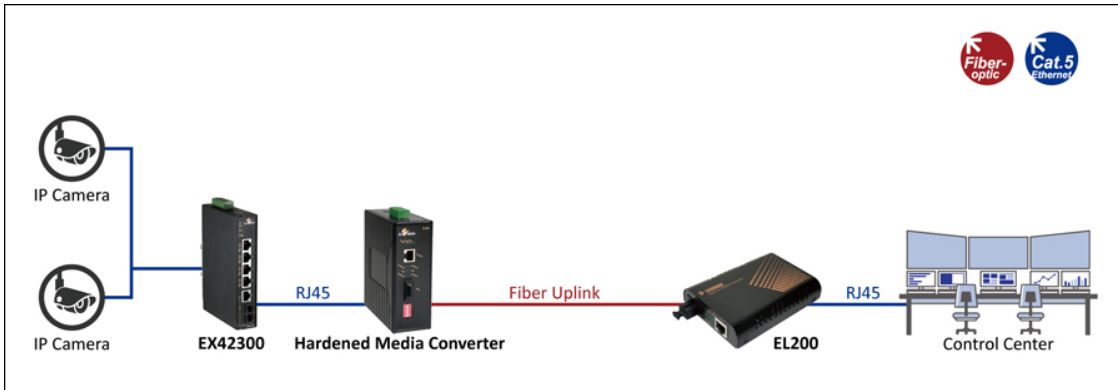

產品尺寸圖

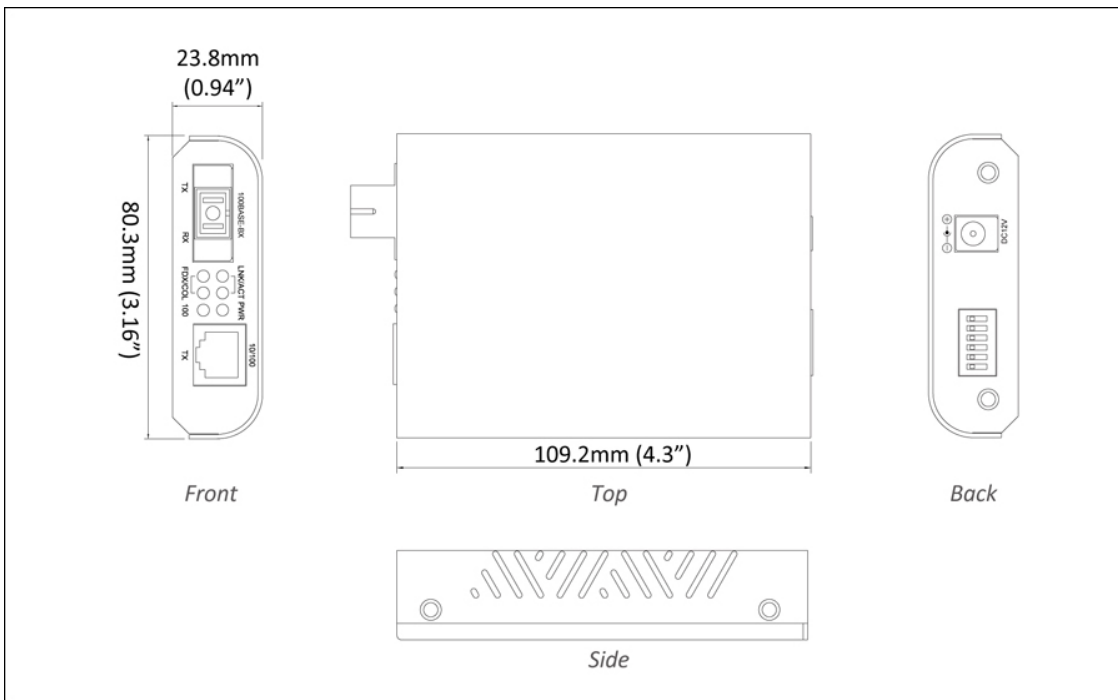

訂購型號

+ 型號

EL200CA-2	10/100BASE-TX to 100BASE-BX Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km Media Converter
EL200CB-2	10/100BASE-TX to 100BASE-BX Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km Media Converter
EL200CA-5	10/100BASE-TX to 100BASE-BX Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km Media Converter
EL200CB-5	10/100BASE-TX to 100BASE-BX Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km Media Converter
EL200CA-20	10/100BASE-TX to 100BASE-BX Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km Media Converter
EL200CB-20	10/100BASE-TX to 100BASE-BX Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km Media Converter
EL200CA-40	10/100BASE-TX to 100BASE-BX Single Mode (SC) WDM - TX: 1310nm/RX: 1550nm-40Km Media Converter
EL200CB-40	10/100BASE-TX to 100BASE-BX Single Mode (SC) WDM - TX: 1550nm/RX: 1310nm-40Km Media Converter

* EMC1600, proprietary 19" chassis system, can house up to 16 x EL200 Series Converters.

* EMC1600 Chassis System is available separately.

* More 100FX fiber options are also available upon request.

+ Accessories

Multiple Channel Chassis www.etherwan.com/products/media-converters/multiple-channel-media-converters

