

EL2211 系列

10/100/1000BASE-TX - 1000BASE-SX/LX/BX光電轉換器



產品亮點

+ Gigabit Connectivity

Auto 10/100/1000BASE-TX and 1000BASE-SX/LX/BX Ethernet transmission conversion
1000Mbps Full duplex, 10/100Mbps Full/Half duplex

+ Optional Chassis System

Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

+ Link-Fault-Pass-Through (LFPT)

LFPT function let network operators be aware of network connection status
If a link fails, the LFPT function will notify the connected device and disable the connection

產品介紹

EL2211系列提供10/100/1000BASE-TX與1000BASE-SX/LX/BX光電轉換；透過DIP Switch指撥器，可以開關LFPT功能，能針對光電轉換器連線狀態提供持續有效的監控。

EL2211採散熱性極佳的鋁製外殼設計，可支援0°C到50°C寬溫操作，提供Gigabit高速傳輸速率，支援9K bytes Jumbo Frame,可壁掛或搭配益網
[EMC1600](#)(19吋標準機箱)集中收容管理。

EtherWAN — "When Connectivity is Crucial."

產品規格

+ 介面

乙太網路埠
10/100/1000BASE-TX: 1 port
1000BASE-SX/LX/BX: 1 port

LED 指示燈號
Per Unit: Power, LFPT
Per Port: Link/Activity, Speed

+ 技術

標準
IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate
14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

傳輸型式
Store-and-forward
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto-negotiation
Auto MDI/MDIX

+ 電源

輸入電壓
12VDC

電力功耗
2.76W max. 0.23A@12VDC

+ 機構

機殼
Aluminum

尺寸
80.3 x 109.2 x 23.8mm (W x D x H)
3.16" x 4.30" x 0.94"

重量
0.15kg (0.33lbs)

安裝方式
Wall mounting, or in EMC1600 Chassis System

+ 環境

工作溫度
0 to 50°C (32 to 122°F)

儲存溫度
-10 to 70°C (-14 to 158°F)

工作濕度
5% to 95% (無凝結)

+ 通過認證

ISO
Manufactured in ISO-9001 facility

Safety
UL 60950-1

Emission Compliance
CE Mark Class A
FCC Part 15B Class A
VCCI Class A

+ 保固

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy


+ What's Included

Device
Media Converter


Power
12VDC Power Adapter

Documentation
Quick Install Guide

產品應用圖

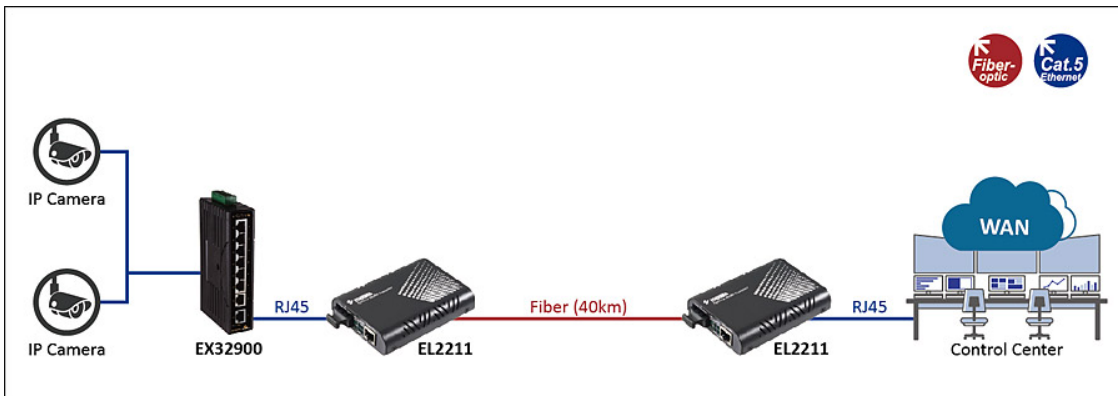

產品尺寸圖

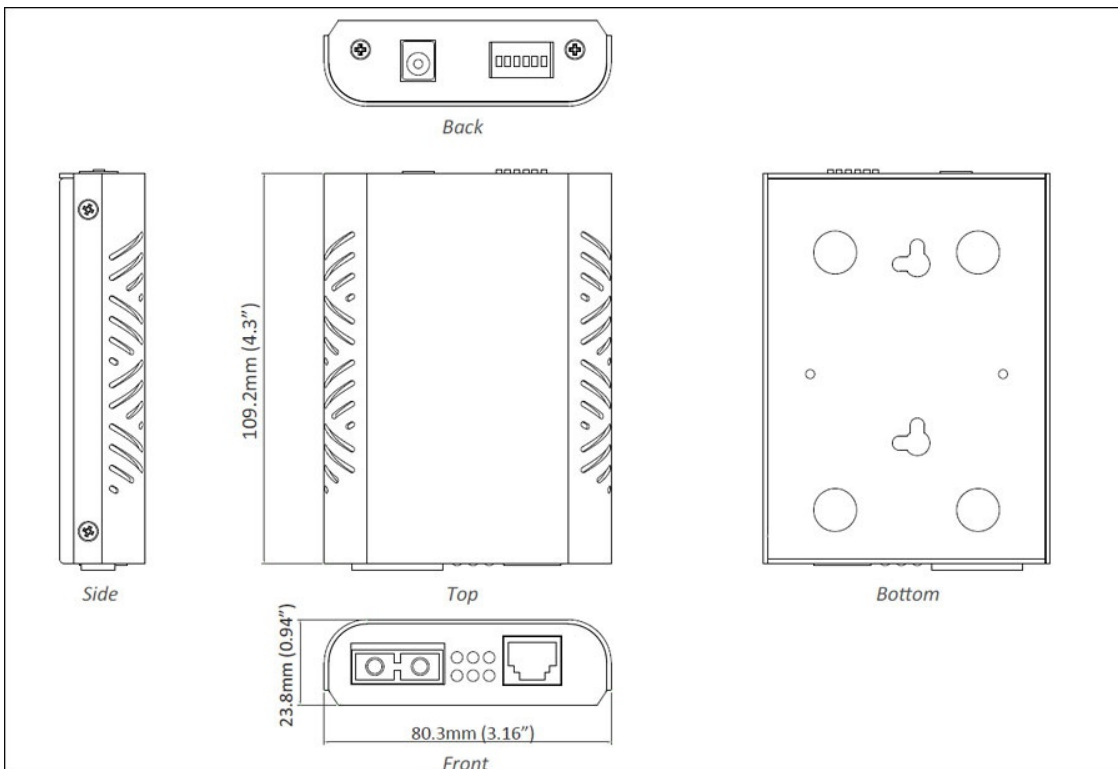

訂購型號

+ 型號

EL2211-X1Z 10/100/1000BASE-TX to 1000BASE-X Media Converter

+ Gigabit Port Options (X)

- 3 1000BASE-SX (SC) - 550m (850nm)
- 4 1000BASE-SX (SC) - 2Km (1310nm)
- 5 1000BASE-SX (ST) - 550m (850nm)
- A 1000BASE-LX (SC) - 10Km
- B 1000BASE-LX (SC) - 20Km (1310nm)
- E 1000BASE-LX (SC) - 40Km (1310nm)
- R 1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
- S 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

+ Power Adapter Options (Z)

- A with external power adapter for AU
- E with external power adapter for EU
- J with external power adapter for JP
- K with external power adapter for UK
- U with external power adapter for USA
- 3C with external power adapter for China

+ Accessories

Multiple Channel Chassis www.etherwan.com/products/media-converters/multiple-channel-media-converters

