

EM1000/EM2000 系列

1000BASE-T - 1000BASE-SX/LX/BX光電轉換器



產品介紹

本產品自2020年10月10日起停產。請點選 [此處](#) 尋找替代產品。

The EM1000/EM2000 Series provides media conversion between 1000BASE-T(X) and 1000BASE-FX Fiber. Easy plug-and play design facilitates network infrastructure construction. Also, this commercial grade Gigabit media converter supports EtherWAN EMC1600 chassis system for easy group installation. The EM1000/EM2000 is the ideal media converter for enterprise environments.

EtherWAN — "When Connectivity is Crucial."

產品亮點

Gigabit Connectivity

- » Auto 1000BASE-T and 1000BASE-SX/LX/BX Ethernet transmission conversion
- » 1000Mbps Full duplex
- » Full wire-speed forwarding rate

Optional Chassis System

- » Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

產品規格

Technology

Standards

- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.3x full duplex and flow control

Forward and Filtering Rate

- 1,488,100pps for 1000Mbps

Processing Type

- Auto Negotiation
- Auto MDI/MDIX

Power

Power Input

- Input Voltage: 12VDC

Power Consumption

- 2.4W Max. 0.2A @ 12VDC

Mechanical

Casing

- Aluminum Case

Dimensions

- 80.3mm (W) x 109.2mm (D) x 23.8mm (H)
(3.16" (W) x 4.3" (D) x 0.94" (H))

Weight

- 150g (0.336lbs.)

Installation

- Wall mounting or use with EMC1600 media converter chassis system

Interface

Ethernet Port

- 1000BASE-T: 1 port
- 1000BASE-SX/LX/BX: 1 port

LED Indicators

- Per Unit: Power Status (Power)
- Per Port: 1000T, 1000SX/LX: Link, Full-duplex/Collision
- Per Port 1000SX/LX: Link, Transmit, Receive

Environment

Operating Temperature

- 0°C to 45°C (32°F to 113°F)

Storage Temperature

- -10°C to 70°C (-14°F to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility


Emission Compliances

CE Mark Class A

FCC Part 15B Class A

VCCI Class A

產品尺寸圖

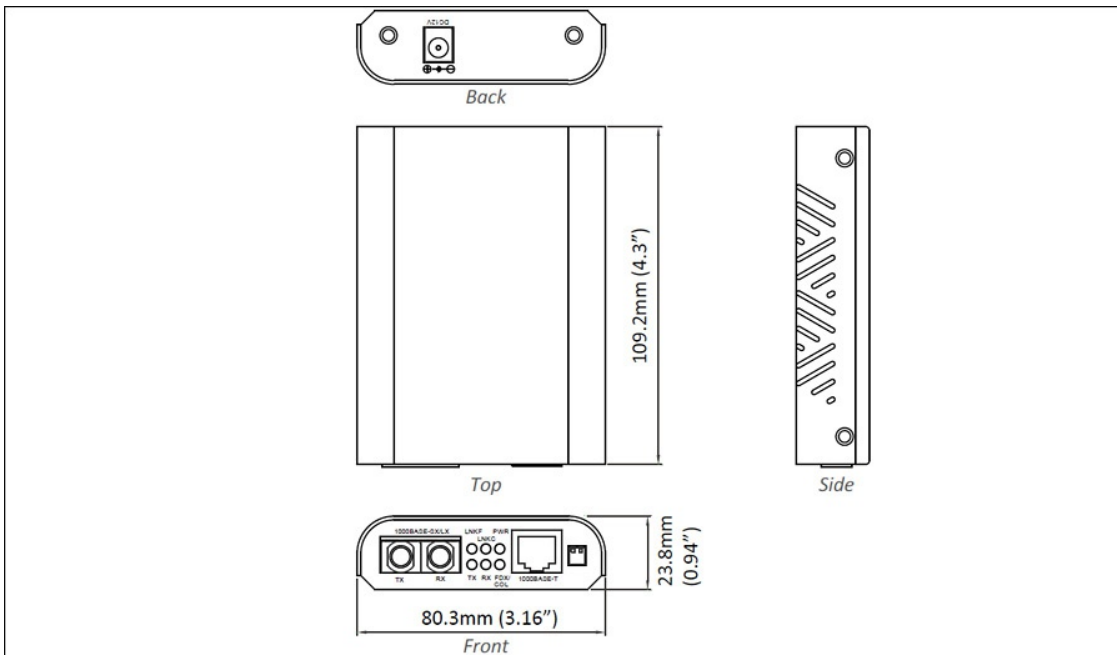

訂購型號

Model

EM1000TSC	1000BASE-T to 1000BASE-SX (SC) - 550m Media Converter (850nm)
EM1000TSC-2	1000BASE-T to 1000BASE-SX (SC) - 2Km Media Converter (1310nm)
EM1000TLC-10	1000BASE-T to 1000BASE-LX (SC) - 10Km Media Converter (1310nm)
EM1000TLC-20	1000BASE-T to 1000BASE-LX (SC) - 20Km Media Converter (1310nm)
EM2000TLCA-20	1000BASE-T to 1000BASE-LX (SC) WDM -TX:1310nm/RX:1550nm - 20Km Media Converter
EM2000TLCB-20	1000BASE-T to 1000BASE-LX (SC) WDM -TX:1550nm/RX:1310nm - 20Km Media Converter
EM2000TLCA-60	1000BASE-T to 1000BASE-LX (SC) WDM -TX:1310nm/RX:1550nm - 60Km Media Converter
EM2000TLCB-60	1000BASE-T to 1000BASE-LX (SC) WDM -TX:1550nm/RX:1310nm - 60Km Media Converter

* EMC1600 (available separately), a proprietary 19" chassis system, can house up to 16 x EM1000/EM2000 Series media converters.



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.