


EN301 系列

32bit PCI-Bus 100BASE-FX 乙太網路介面卡

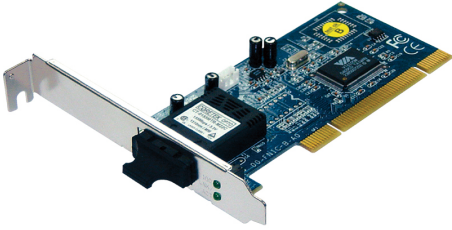

產品特色

本產品自2021年07月31日起停產。請點選 [此處](#) 尋找替代產品。

- » PCI 2.2 Specification compliant
- » Separate 2K Bytes FIFO for receive and transmit controllers
- » Advanced Configuration Power Interface (ACPI):
 - Supports PC99, PC2001 and Net PC requirements
 - Supports PCI Bus Power Management Interface Specification Version 1.0/1.1
 - Supports ACPI Specification 1.0
 - Support Network Device Class Power Management Specification Version 1.0a
 - Wake-up supports magic packet
- » MAC Enhancement Function
 - UDP, TCP/IP checksum for IPv4 frames
 - Statistics of 12 sets of hardware Management Information BASE counters
- » Utilities
 - Windows auto installation
 - MS-DOS diagnostics
 - Desktop Management Interface (DMI) 2.0 (Vista is not support)
- » 0°C to 45°C (32°F to 113°F) operating temperature range

產品規格

Technology

Standards

- IEEE802.3u 100BASE-FX
- IEEE802.3x
- IEEE802.1Q

Protocols

- IEEE802.3x full-duplex flow control; Multiple pause frame XON/XOFF

Driver

- Microsoft Windows 95 (including OSR2), Windows 98 (including SE), Windows ME, Windows 2000, Windows XP, Windows Vista (32bit/64bit), Windows NT 4.0,
- Windows 7 (32bit/64bit)
- LAN Manager, LANtastic, PC-NFS
- Novell Netware 3.11, 3.12, 4.x, 5.x, 6.0, Client 32
- Linux Kernel 2.2.x/2.4.x/2.6.x
- FreeBSD 3.2, 4.0, 4.11, 4.2, 5.x
- SCO UnixWare 7.x/OpenUnix 8, SCO UNIX 5.0

Power

Power Consumption

- 1W Max.

Mechanical

Dimensions

- EN301: 133mm (L) x 117.5mm (W) ; 5.23" (L) x 4.62" (W)
- EN301L: 133mm (L) x 80mm (W) ; 5.23" (L) x 3.14" (W)

Weight

- 80g (0.18lb.)
-

Interface

Ethernet Port

- 100BASE-FX: 1 port

LED Indicators

- Per Unit: Link/Activity, Speed
-

Environment

Operating Temperature

- 0°C to 45°C (32°F to 113°F)

Storage Temperature

- -10°C to 70°C (14°F to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals


ISO

- Manufactured in an ISO9001 facility

Emission Compliance

- FCC Part 15, Class B
 - CE Mark Class B
-

產品尺寸圖

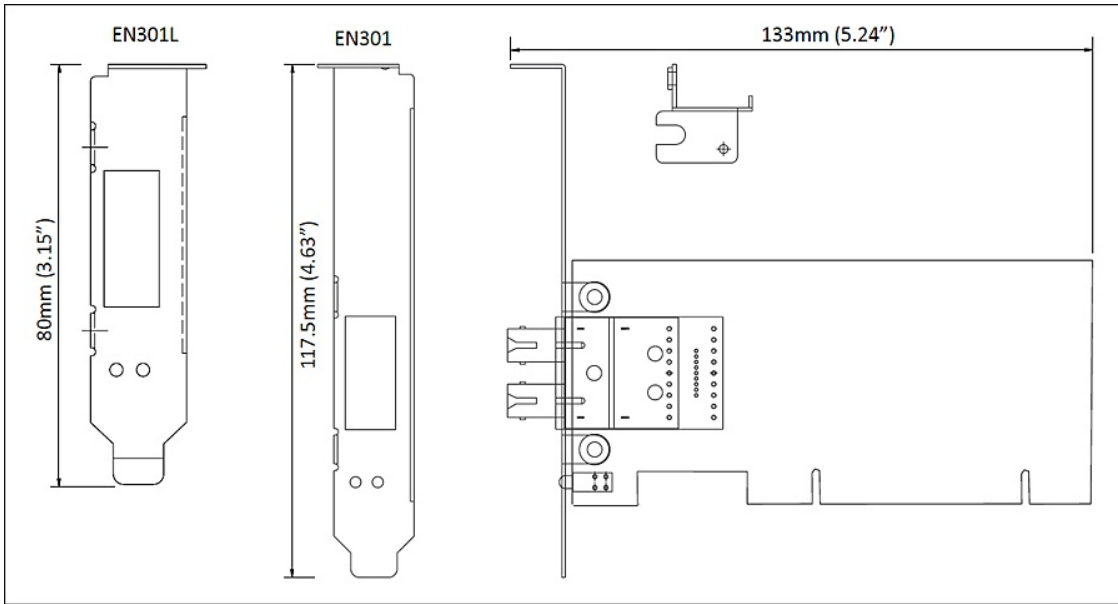

訂購型號

Model

| | |
|-------------|--|
| EN301C | 100BASE-FXMultiMode(SC) Ethernet Adapter |
| EN301T | 100BASE-FXMultiMode(ST) Ethernet Adapter |
| EN301C-20 | 100BASE-FXSingleMode(SC)-20Km Ethernet Adapter |
| EN301C-40 | 100BASE-FXSingleMode(SC)-40Km Ethernet Adapter |
| EN301T-20 | 100BASE-FXSingleMode(ST)-20Km EthernetAdapter |
| EN301CB-20 | 100BASE-FXSingleMode(SC) WDM-TX:1310nm/RX:1550nm-20Km Ethernet Adapter |
| EN301CA-40 | 100BASE-FXSingleMode(SC) WDM-TX:1310nm/RX:1550nm-40Km Ethernet Adapter |
| EN301CB-40 | 100BASE-FXSingleMode(SC) WDM-TX:1550nm/RX:1310nm-40Km Ethernet Adapter |
| EN301LC | 100BASE-FXMultiMode(SC) Ethernet Adapter with low-profile bracket |
| EN301LT | 100BASE-FXMultiMode(ST) Ethernet Adapter with low-profile bracket |
| EN301LC-20 | 100BASE-FXSingleMode(SC)-20Km Ethernet Adapter with low-profile bracket |
| EN301LC-40 | 100BASE-FXSingleMode(SC)-40Km Ethernet Adapter with low-profile bracket |
| EN301LT-20 | 100BASE-FXSingleMode(ST)-20Km Ethernet Adapter with low-profile bracket |
| EN301LCA-20 | 100BASE-FXSingleMode(SC)WDM-TX:1310nm/RX:1550nm-20Km Ethernet Adapter with low-profile bracket |
| EN301LCB-20 | 100BASE-FXSingleMode(SC)WDM-TX:1550nm/RX:1310nm-20Km Ethernet Adapter with low-profile bracket |
| EN301LCA-40 | 100BASE-FXSingleMode(SC)WDM-TX:1310nm/RX:1550nm-40Km Ethernet Adapter with low-profile bracket |
| EN301LCB-40 | 100BASE-FXSingleMode(SC)WDM-TX:1550nm/RX:1310nm-40Km Etherne tAdapter with low-profile bracket |



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.