


工業級 DIN-Rail 電源供應器

工業級 電源供應器 系列

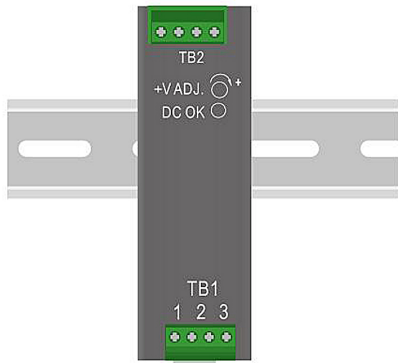

Overview

Stable Performance under Difficult Environments

EtherWAN provides DC single output industrial DIN rail power supply units come with such protection features as short circuit, overload, over voltage and over temperature for the stable operation of industrial Ethernet equipment. It uses the free air convection cooling system to prevent operating temperature from rising. Being able to operate under the temperature range from -20 to 70 degrees C (maximum), the DC single output industrial DIN rail power supply units can be placed in almost any difficult environments.

EtherWAN — "When Connectivity is Crucial."

Ordering Info

Model

| Model number | Working Temperature | Input Voltage | Output Voltage | Description | datasheet |
|-------------------|---------------------|---------------|----------------|---|---------------------------|
| HDR-30-12 | -30 ~ +70°C | 85-264VAC | 12VDC | 30W/ 2A DIN Rail 12VDC Industrial Power Supply | datasheet |
| HDR-30-24 | -30 ~ +70°C | 85-264VAC | 24VDC | 30W/1.5A DIN- Rail 24VDC Industrial Power Supply | datasheet |
| HDR-60-24 | -30 ~ +70°C | 85-264VAC | 24VDC | 60W/2.5A DIN- Rail 24VDC Industrial Power Supply | datasheet |
| EDR-75-24 | -20 ~ +60°C | 90-264VAC | 24VDC | 75W/3.2A DIN- Rail 24VDC Industrial Power Supply | datasheet |
| EDR-75-48 | -20 ~ +60°C | 90-264VAC | 48VDC | 75W/1.6A DIN- Rail 48VDC Industrial Power Supply | datasheet |
| EDR-120-24 | -20 ~ +60°C | 90-264VAC | 24VDC | 120W/5A DIN- Rail 24VDC Industrial Power Supply | datasheet |

| | | | | | |
|--------------------|-------------|--------------|-------|--|---------------------------|
| EDR-120-48 | -20 ~ +60°C | 90-264VAC | 48VDC | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | datasheet |
| NDR-120-48 | -20 ~ +70°C | 90-264VAC | 48VDC | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | datasheet |
| NDR-240-48 | -20 ~ +70°C | 90-264VAC | 48VDC | 240W/5A DIN-Rail 48VDC Industrial Power Supply | datasheet |
| NDR-480-48 | -20 ~ +70°C | 90-264VAC | 48VDC | 480W/10A DIN-Rail 48VDC Industrial Power Supply | datasheet |
| DDR-120A-48 | -40 ~ +70°C | 9-18VDC | 48VDC | 120W/2.1A DIN-Rail 48VDC Industrial Power Supply | datasheet |
| DDR-120B-48 | -40 ~ +70°C | 16.8-33.6VDC | 48VDC | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | datasheet |

