

EG97000 系列

強固級網管型 8埠10/100/1000BASE-T +16埠 100/1000BASE SFP +4埠1/10G SFP+ Layer 3 乙太網路交換器



產品介紹

EtherWAN 的 EG97244 產品為高效能超高速第 3 層乙太網路交換器。EG97244 具有用於光纖的多個千兆位 (1G SFP) 連接埠以及 4 個 10 千兆 (10G SFP+) 的連接埠，主要定位是應用於骨幹型網路上。產品本身具有高度彈性、快速和穩定可靠的優勢，可廣泛應用於城市基礎設施、交通、安全和以及其它與網路串聯相關的網路管理工程領域中。

EtherWAN — "When Connectivity is Crucial."

產品亮點

+ 具高頻寬且多點網路連結的靈活性與傳輸能力+ 專案合規等級的網路產品

16 個 100/1000M 雙速率 SFP 連接埠，用於多組光纖連接
4 個 1/10G 雙速率 SFP+ 連接埠，用於連接到核心與集線核心層
8 個 10/100/1000BASE-T RJ45 連接埠，用於乙太網路的銅線連接

符合美國政府 TAA 專案標準
符合 NEMA TS2 等級
符合 UL 安全認證

+ 適用於不通風和惡劣環境的強固設計

-40 至 75°C (-40 至 167°F) 寬工作溫度範圍
無風扇設計
高耐溫衝擊和高雜訊抗噪

+ 穩定且安全的網路管理機制

連接埠端口控管 (Port control)
透過風暴 (Storm detection and control) 偵測和控管
可搭配 eVue™ 和 eLite 軟體來做網路監管

產品特色

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware upgrade
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3
Modbus TCP

+ Security

MAC Address filtering
Enable/Disable port
Storm control
System logging
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL and HTTPS for web security
ACL (Access Control List, up to 4096 entries)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs

IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRP

+ Quality of Service (QoS)

Priority Queues: 8 queues per port
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode
Rate Limiting (Ingress/Egress)

+ Software Properties and Performance

Switching Fabric
32Gbps

Forwarding Rate
23.5Mpps

Max VLANs
256 (4096 VID)

Jumbo Frame Size
9KB

MAC Table Size
16K

Packet Buffer Memory
12M bits

產品規格

+ Interface

Ethernet

8 or 12 x 10/100/1000BASE-T(X)
2 or 4 x 100/1000BASE SFP

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;
Max Input Current: 8mA

Dry Contact: Logic Level 1-Close to GND; Logic
Level 0-Open

Alarm Contact

2 x Relay output, current capacity 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

Per PoE Port: PoE Status (Orange)

+ Physical

Casing Material

Aluminum

IP Rating

IP30

Dimensions

72 x 140 x 170mm (W x D x H)
2.8" x 5.5" x 6.7"

Weight

1.5kg (3.3lbs)

Installation Type

DIN-rail mounting

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

1,108,382 hours

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3ad link aggregation control
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x full duplex and flow control
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.1ab LLDP
IEEE 802.3az EEE
IEEE 802.3af/at/bt Power over Ethernet
IEEE 1588v2 PTP

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory

2Gb DDR3 SDRAM

Flash Storage

1Gb

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS

EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
PoE Ports: line to earth 6kV Surge
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety

UL 61010

Traffic

NEMA TS2

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

FED STD 101C Method 5007.1

Industrial

EN 50121-4

+ Power

Input

46-57VDC Redundant (Terminal block)**
** 46-57VDC for IEEE 802.3af type 1, ≤15.4W PD devices.

52-57VDC for IEEE 802.3at/bt type 2/3, 30W, 60W PD devices.

54-57VDC for IEEE 802.3bt, type 4, 90W PD devices

Power Consumption

20W Max (without PoE)

PoE Modes

802.3af/at Mode A: Pins 1/2(-), 3/6(+)

802.3bt (60W): Mode A & B, Pins 1/2(-), 3/6(+), 4/5(+), 7/8(-)

PoE Power Output

Ports 1-4, 9-12: Up to 30W/port

Ports 5-8: Up to 60W/port

Power Budget: 240W

Protection

Reverse Polarity Protection

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch

Cables

1 Console Cable

Installation

Mounting brackets, screws

Documentation

Quick Install Guide


管理軟體

Network Management

[eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery

[eLite™ Network Discovery and IP Configuration Tool](#)

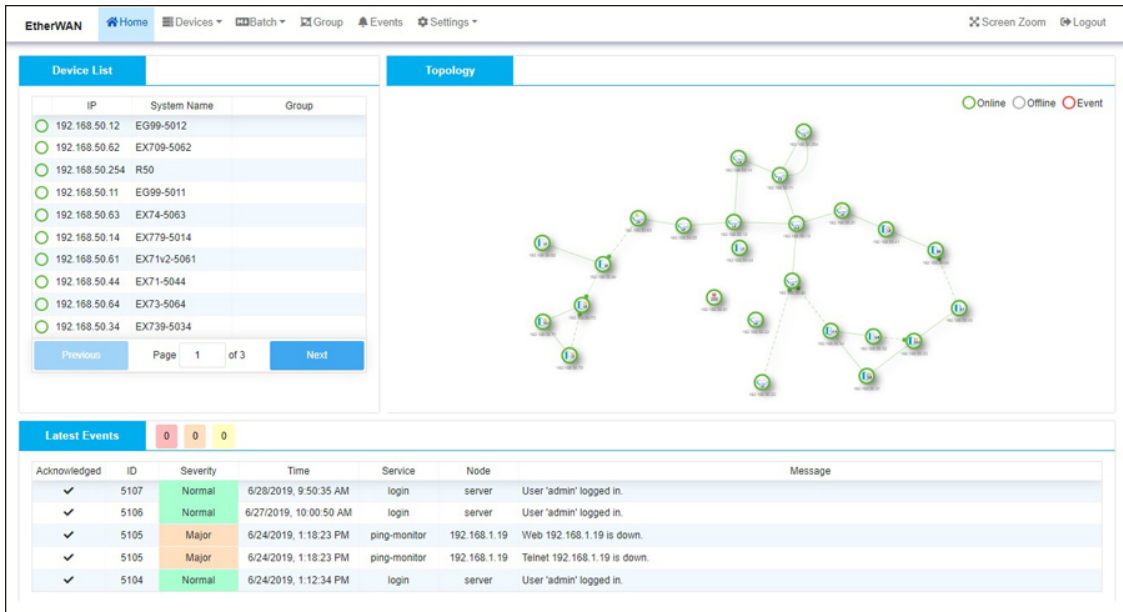

Device List


| IP | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12 | EG99-5012 | |
| 192.168.50.62 | EX709-5062 | |
| 192.168.50.254 | R50 | |
| 192.168.50.11 | EG99-5011 | |
| 192.168.50.63 | EX74-5063 | |
| 192.168.50.14 | EX779-5014 | |
| 192.168.50.61 | EX71v2-5061 | |
| 192.168.50.44 | EX71-5044 | |
| 192.168.50.64 | EX73-5064 | |
| 192.168.50.34 | EX739-5034 | |

Topology

Legend: ● Online ○ Offline ○ Event

Latest Events

| Acknowledged | ID | Severity | Time | Service | Node | Message |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓ | 5107 | Normal | 6/28/2019, 9:50:35 AM | login | server | User 'admin' logged in. |
| ✓ | 5106 | Normal | 6/27/2019, 10:00:50 AM | login | server | User 'admin' logged in. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓ | 5104 | Normal | 6/24/2019, 1:12:34 PM | login | server | User 'admin' logged in. |

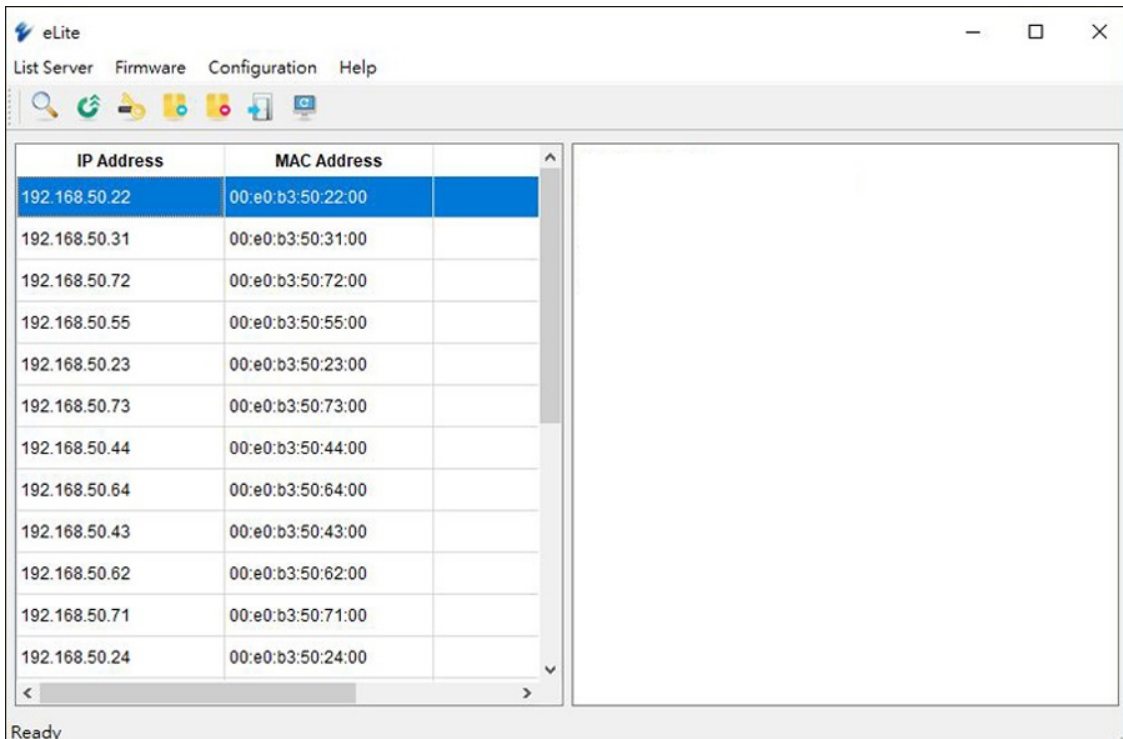

eLite

List Server Firmware Configuration Help

| IP Address | MAC Address |
|---------------|-------------------|
| 192.168.50.22 | 00:e0:b3:50:22:00 |
| 192.168.50.31 | 00:e0:b3:50:31:00 |
| 192.168.50.72 | 00:e0:b3:50:72:00 |
| 192.168.50.55 | 00:e0:b3:50:55:00 |
| 192.168.50.23 | 00:e0:b3:50:23:00 |
| 192.168.50.73 | 00:e0:b3:50:73:00 |
| 192.168.50.44 | 00:e0:b3:50:44:00 |
| 192.168.50.64 | 00:e0:b3:50:64:00 |
| 192.168.50.43 | 00:e0:b3:50:43:00 |
| 192.168.50.62 | 00:e0:b3:50:62:00 |
| 192.168.50.71 | 00:e0:b3:50:71:00 |
| 192.168.50.24 | 00:e0:b3:50:24:00 |

Ready

訂購型號


+ Model

| | |
|--------------|--|
| EX78934E-0VB | 12-port 10/100/1000BASE-T(X) PoE + 4-port 100/1000BASE SFP |
| EX78924E-0VB | 8-port 10/100/1000BASE-T(X) PoE + 4-port 100/1000BASE SFP |
| EX78922E-0VB | 8-port 10/100/1000BASE-T(X) PoE + 2-port 100/1000BASE SFP |

+ Accessories

| | |
|------------------------------|--|
| Hardened 100BASE SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| Hardened Gigabit SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| DIN-Rail Power Supplies | www.etherwan.com/products/din-rail-power-supply (*) |
| *Recommended Power Supply | NDR-480-48 480W 48VDC DIN-Rail Power Supply |

產品尺寸圖

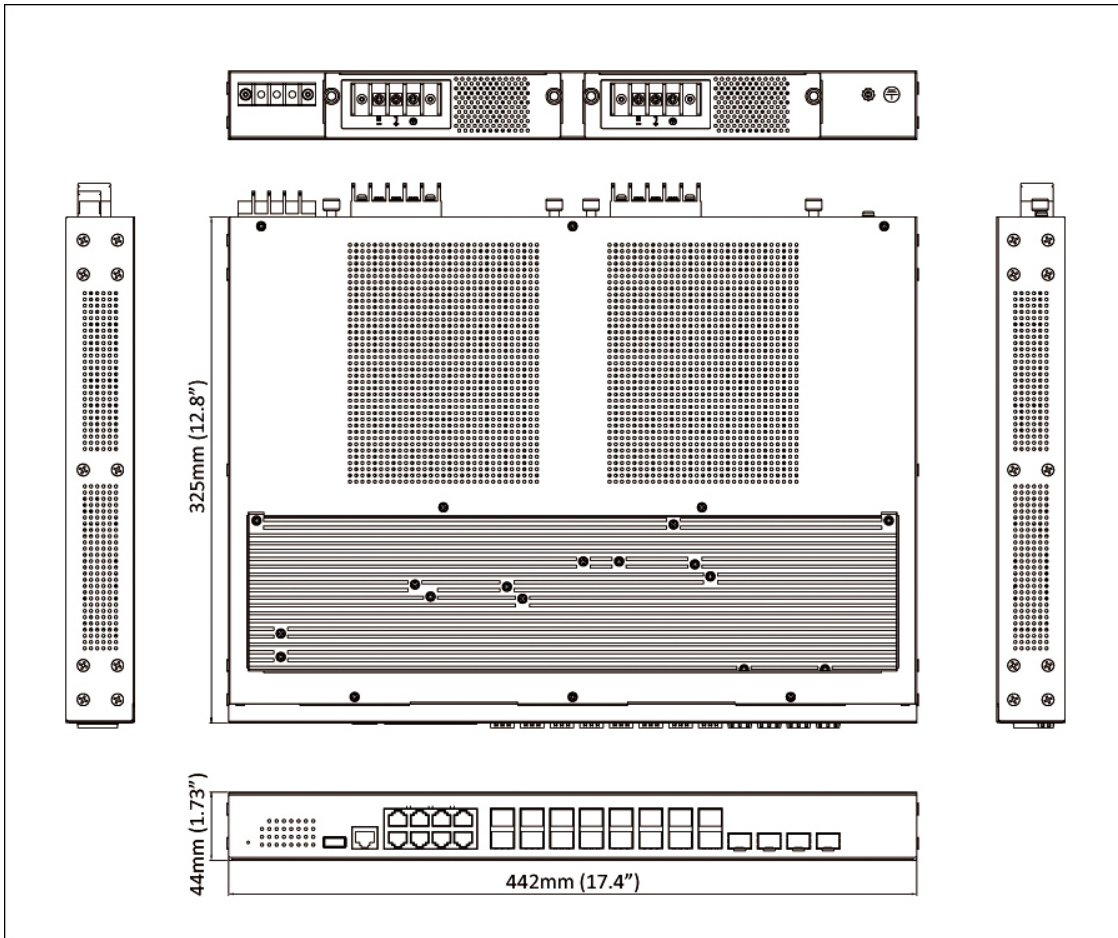

產品應用圖

