

EX47000 系列

IEC 61850-3/IEEE 1613 強固級非網管 2-8埠10/100BASE-TX +2-6埠100BASE-FX 乙太網路交換器



產品介紹

本產品自2021年07月31日起停產。請點選 [EX42008](#) 和 [EX42900](#) 尋找替代產品。

EtherWAN's EX47000 Series is a hardened unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments.

The EX47000 Series is equipped with eight Fast Ethernet ports, or a combination of Fast Ethernet copper ports and two 100FX ports for long distance connectivity. Although unmanaged, the EX47000 is feature rich with full wire speed Fast Ethernet throughput, making the EX47000 Series a powerful network switch. With its hardened-grade specifications and IEC61850 & IEEE1613 certifications, the EX47000 Series is capable of operating under high EMI environments at the temperatures ranging from -40°C to 75°C, making it an ideal choice for harsh applications.

EtherWAN — "When Connectivity is Crucial."

產品亮點

Hardened Grade

- » Supports -40°C to 75°C (-40°F to 167°F) operating temperature

Versatile mounting Options

- » DIN-Rail or panel mounting

Fiber Connectivity

- » Up to two 100BASE-FX ports with SC, ST and WDM options

產品規格

Technology

Standards

- IEEE802.3, 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 448K bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

Power

Input

- 2048 MAC addresses
- Redundant power inputs:
12 to 48VDC (Terminal Block)
12VDC (DC Jack)

Power Consumption

- 6W Max. 12VDC @ 0.5A

24VDC @ 0.25A

48VDC @ 0.125A

Protection

- Reverse polarity protection
-

Mechanical

Casing

- Aluminum Case
- IP30

Dimensions

- 60mm (W) x 125mm (D) x 145mm (H)
(2.36" (W) x 4.92" (D) x 5.7" (H))

Weight

- 1Kg (2.2lbs.)

Installation

- DIN-Rail (Top hat type 35mm) or Panel mounting Interface

Ethernet Ports

- 10/100BASE-TX: 16, 15 or 14 ports
- 100BASE-FX: 0, 1 or 2 ports

LED Indicators

- Per Unit: Power 1 (Green)
Power 2 (Green)
Power 3 (Green)
Fault (Red)
- Per Port: Link/Act (Green)
100M (Green)

Alarm Contact

- One relay output with current 1A @ 24VDC
-

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)
- Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals

ISO

- Manufactured in an ISO 9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 55022 Class A

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated FRI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

EN 55024

Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)


FED STD 101C Method 5007.1 (Free fall w/ package)

Industrial Compliance

IEC 61850 / IEEE 1613

EN 50121-4

產品尺寸圖

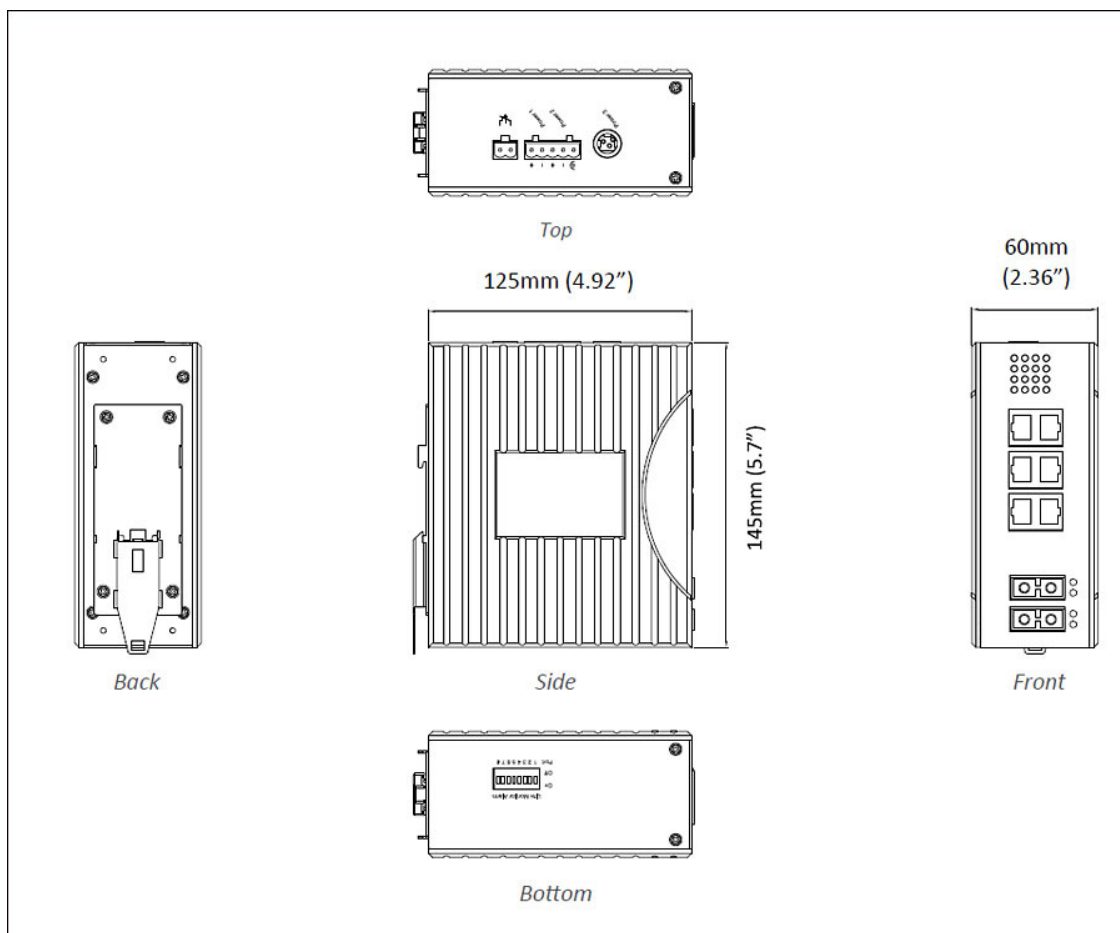

訂購型號

型號

EX47080-00B	8-port 10/100BASE-TX Hardened Unmanaged Ethernet Switch
EX47062-X0B	6-port 10/100BASE-TX +2-port 100BASE-FX Hardened Unmanaged Ethernet Switch
EX47061-X0B	6-port 10/100BASE-TX +1-port 100BASE-FX Hardened Unmanaged Ethernet Switch
EX47042-X0B	4-port 10/100BASE-TX +2-port 100BASE-FX Hardened Unmanaged Ethernet Switch
EX47041-X0B	4-port 10/100BASE-TX +1-port 100BASE-FX Hardened Unmanaged Ethernet Switch
EX47026-X0B	2-port 10/100BASE-TX +6-port 100BASE-FX Hardened Unmanaged Ethernet Switch

* DIN-Rail mounting kit included.

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

* More 100FX Fiber options also available upon request.

Optional Accessories

KP-AA96-480	Panel mounting kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA
EX41-145044-X	Power Supply 45W 12VDC with Latch (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA

