

EX63000 系列

工業級網管型 16埠10/100BASE + 2埠Gigabit combo 乙太網路交換器



產品介紹

EX63000系列為網管型鋁軌式安裝機種，內建16個10/100BASE乙太網路連接埠及2個Gigabit combo埠，可搭配固定式光纖，工業等級設計可在-10到60°C溫度環境下穩定運作，具備完整管理功能，包含port security、IGMP snooping、VLANs、GARP 協定和LACP；使用者可透過網頁瀏覽telnet、SNMP、RMON、TFTP 和 RS-232 console管理介面，使複雜的專案規劃事半功倍。

支援益網獨家技術Alpha-Ring環狀網路備援機制，可在網路發生斷線時迅速啟動備援機制，於小於15毫秒內便可快速恢復連線通訊。同時支援 Redundant Pair 協定，可將不同的備援環狀網路串接在一起，可大幅延伸備援機制架構，同時最高可支援235個環狀網路並支援50毫秒的網路回覆時間。

EtherWAN — [When Connectivity is Crucial.](#)

產品亮點

多元彈性介面組合

- » 支援16個10/100base-TX加2埠Gigabit SX/LX/BX combo

工業等級設計

- » 操作溫度(-10到60°C)
- » 無風扇和堅固的金屬外殼設計，可有效避免高溫及高濕度環境導致材質老化

遠端安全存取介面

- » 支援802.1x及RADIUS等優化網路安全機制

產品特色

Management

- » Interface
 - CLI, Telnet and web browser
 - SNMP v1/v2c/v3
 - » Firmware and configuration upgrade and backup via TFTP
 - » Supports DHCP Server/Client
 - » RMON (Remote monitoring): group 1, 2, 3, 9
 - » Port mirroring: TX/RX and both
 - » NTP (Network Time Protocol) time synchronization
 - » IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
 - » IPv4/IPv6
-

Security

- » MAC address filtering
 - » Enable/disable port
 - » Storm control (broadcast and multicast types)
 - » IEEE 802.1x LAN access control
 - » Remote authentication through RADIUS
 - » SSH for CLI and Telnet security
 - » SSL for web security
 - » Multi-level user account/password against unauthorized configuration
 - » System log (remote/local)
-

Quality of Service (QoS)

- » Priority Queues: 4 queues per port
 - » Traffic classification based on IEEE 802.1p CoS, DSCP, WRR (Weighted Round Robin) and strict mode
 - » Rate Limiting (Ingress/Egress)
-

Layer 2 Features

- » Auto-negotiation for port speed and duplex mode
- » Flow Control
 - IEEE 802.3x full duplex mode

- Back-Pressure half duplex mode
 - » Redundant Protocol
 - IEEE 802.1D Spanning Tree Protocol (STP)
 - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
 - » VLANs
 - Port-based VLANs
 - IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
 - GVRP (GARP VLAN Registration Protocol)
 - GMRP (GARP Multicast Registration Protocol)
 - » Link Aggregation
 - Static Trunk (2 groups, support MAC base)
 - IEEE 802.3ad Link Aggregation Control Protocol
 - » IGMP Snooping
 - IGMP Snooping v1/v2/v3
-

Performance

- » Switching Capability: 7.2Gbps
-

產品規格

技術

標準

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-SX/1000BASE-LX
- IEEE 802.3x Full duplex and flow control
- IEEE 802.1p QoS
- IEEE 802.1Q Tag VLANs
- IEEE 802.1w RSTP
- IEEE 802.1x Port-based Network Access Control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

緩衝記憶體封包

- 12M bits

傳輸型式

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

MAC地址表

- 16K MAC addresses
-

電源

輸入電壓

- Redundant power inputs: 12-48VDC (Terminal Block)

電力功耗

- 8.06W 0.336A@24VDC

Protection

- Reverse polarity protection
-

機構

機殼

- 金屬材質
- IP30

尺寸

- 59 x 125 x 145mm (W x D x H)
(2.32" x 4.92" x 5.71")

重量

- 0.84Kg

安裝方式

- DIN-Rail
-

介面

乙太網路埠

- 10/100BASE-TX: 16 ports
- Gigabit: 0, 1 or 2 ports

Console Port

- Port: One DB9 RS-232 port

LED 指示燈號

- Per Unit: Power 1, Power 2
- Per Port: Link/Activity (Green: Copper; Orange: Fiber)

Alarm Contact

- One relay output with current 0.6A@30VDC
-

環境

工作溫度

- -10 to 60°C (-14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

儲存溫度

- -45 to 85°C (-49 to 185°F)

工作濕度

- 5% to 95% (無凝結)
-

通過認證

ISO

- Manufactured in an ISO 9001 facility

Safety

UL 61010 (pending)

EMI

FCC Part 15B Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-6-2


- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

Environmental Test Compliances


IEC 60068-2-6 Fc (Vibration Resistance)

FED STD 101C Method 5007.1 (Free fall w/package)

產品應用圖

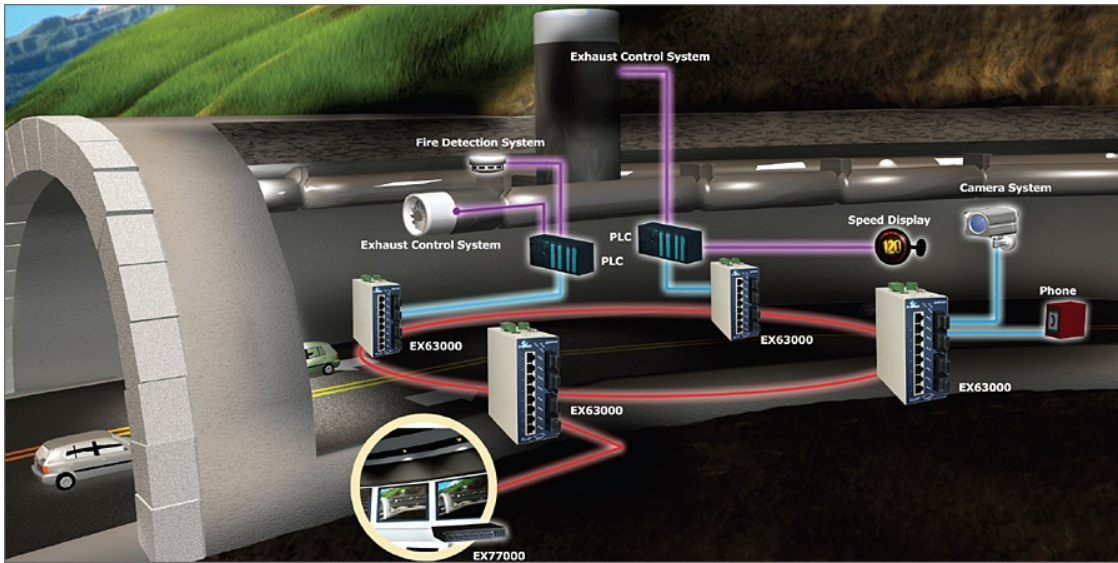

產品尺寸圖

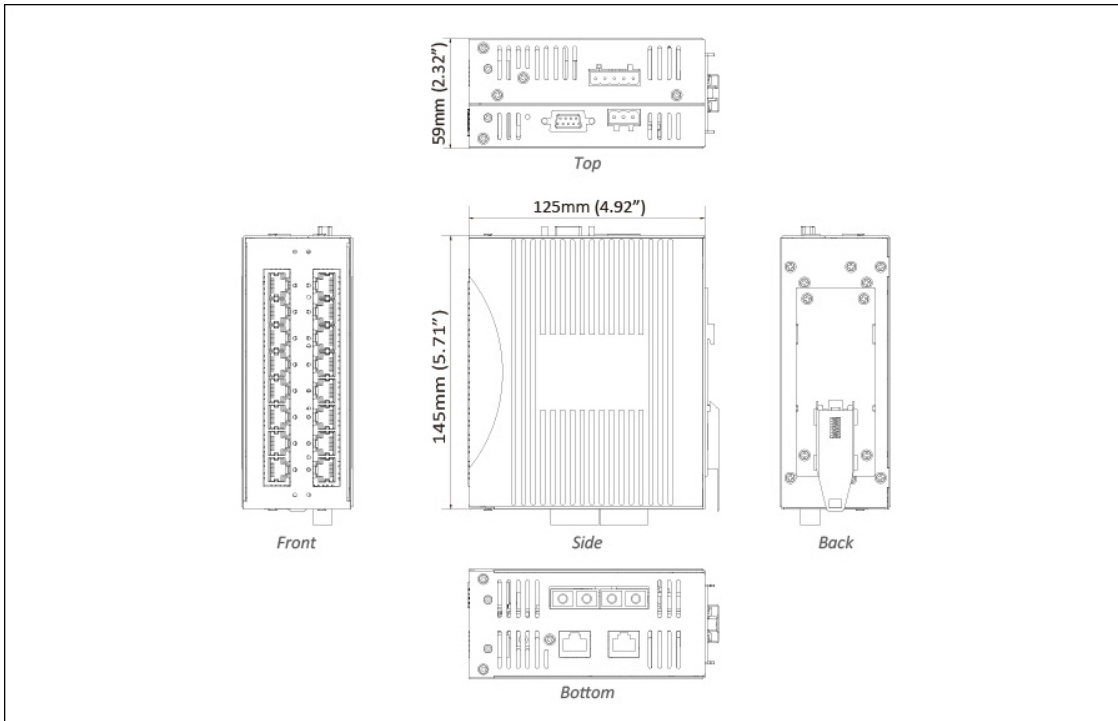

訂購型號

型號

EX63400-00B	16-port 10/100BASE-TX Industrial Managed Ethernet Switch
EX63402-0YB	16-port 10/100BASE-TX +2-port Gigabit Industrial Managed Ethernet Switch

* DIN-Rail mounting kit included.

Gigabit Port Options (Y)

1	10/100/1000BASE-TX (No Gigabit Fiber port supported)
3	Combo port: 10/100/1000BASE-TX with 1000BASE-SX (SC) - 550m
4	Combo port: 10/100/1000BASE-TX with 1000BASE-SX (SC) - 2Km
5	Combo port: 10/100/1000BASE-TX with 1000BASE-SX (ST) - 550m
A	Combo port: 10/100/1000BASE-TX with 1000BASE-LX (SC) - 10Km
B	Combo port: 10/100/1000BASE-TX with 1000BASE-LX (SC) - 20Km

Optional Accessories

KP-AA96-480	Panel mounting Kits
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EX41-136046-X	Power Supply 36W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA

