


EW75000-13MP

Hardened IP67 Outdoor Wireless Bridge/Access Point

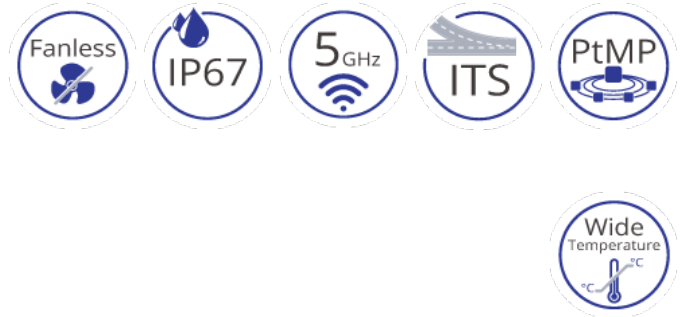

Overview

The eWAV EW75000-13MP is a hardened IP67 outdoor wireless Multi-Point Bridge/Access Point unit providing high speed wireless connectivity remotely. Comprised of high-power IEEE 802.11ac MIMO wireless radios with gigabit IEEE 802.3at PoE connectivity, the EW75000-13MP is hardened against extreme temperatures and water ingress for harsh and demanding environments and is designed to accept Multiple connections from the EW75000-13 Bridge Subscriber Unit

eWAV delivers the power and range (up to 20 miles) to wirelessly connect remote networks, or extend existing networks in an efficient and cost-effective way. It supports 5GHz 802.11 a/n/ac for long distance Point-to-Point data transmission. Maximum transmission speeds are up to 866Mbps on the 5GHz band.

EtherWAN — "When Connectivity is Crucial."

Highlights

High bandwidth wireless connectivity

- » Designed for Point-to-Multi-Point wireless remote connectivity
- » IEEE 802.11a/n/ac providing high throughput data transmission on 5GHz up to 866Mbps
- » 2 x 2 MIMO antennas with high gains

Hardened grade with IP67 protection

- » Wide operating temperature range for extreme environments
- » Fanless and ruggedized outdoor IP67 enclosure

Comprehensive and advanced software features

- » Static routing, RIPv1 & v2 and OSPFv2
- » Built in Stateful Firewall and RADIUS for security control
- » RF strength LEDs and Bandwidth Tester to ease installation effort

Software Features

Management

- » Interface
 - Web Browser
 - SNMP v1/v2/v3
 - » Firmware and configuration upgrade and backup via Web Browser
 - » Supports DHCP Server/Client/Relay
 - » DNS cache and Web Proxy
 - » System health monitoring including temperature and voltage
 - » Local system log, e-mail and remote log service
 - » SNTP client
 - » Useful tools such as Bandwidth Test, E-mail, Ping, Traceroute, Packet Sniffer and Traffic Generator
-

Wireless

- » Encryption: WPA, WPA2, WEP, AES
 - » Dynamic Frequency selection
 - » Proprietary Nstreme and Nv2 protocols for long distance transmission
-

Security

- » RADIUS client
- » Powerful Firewall
 - Stateful packet inspection
 - Layer-7 protocol detection
 - Peer-to-peer protocols filtering
 - Traffic classification by:
 1. Source MAC address
 2. IP addresses (network or list) and address types (broadcast, local, multicast, unicast)
 3. Port or port range
 4. IP protocols
 5. Protocol options (ICMP type and code fields, TCP flags, IP options and MSS)
 6. Interface the packet arrived from or left through
 7. Internal flow and connection marks
 8. DSCP byte

- 9. Packet content
 - 10. Rate at which packets arrive and sequence numbers
 - 11. Packet size
 - 12. Packet arrival time
-

Routing

- » Static routing, RIPv1 & v2 and OSPFv2
 - » Bidirectional Forwarding Detection
 - » Prefix List to filter and control the routing table
-

Hardware Specifications

Technology

Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.11a/n/ac Wireless LAN

Performance

- Wireless transmission rate 5GHz:
11a: 108Mbps, 11n: 300Mbps, 11ac: 866Mbps
- Ethernet data rate
Up to 540Mbps (LAN to wireless 11ac)

Wireless

- RF channels
2 Non-overlapping
- Frequency range
5GHz: 5150-5250MHz and 5725-5850MHz
- Channel width
5GHz: 10MHz, 20MHz, 40MHz, 80MHz
- Data security
256-bit AES-CCM

Transmit power and receive sensitivity 5GHz

| | Transmit power (dBm) | Receive Sensitivity |
|-----------------|----------------------|---------------------|
| 6MBit/s | 31 | -96 |
| 54MBit/s | 27 | -81 |
| MCS0 | 30 | -96 |
| MCS7 | 27 | -77 |
| MCS9 | 22 | -72 |

Power

Input

- PoE, 802.3af/at/bt PSE

Power Consumption

- 13W Max.
-

Mechanical

Casing

- UV Protected Polystyrene case with internal metal enclosure
- IP67

Dimensions (W x H x D)

- 270 x 301.7 x 76mm (10.63"x 11.88" x 3")

Weight

- 3.5lbs


Installation

- Pole/Wall Mounting
-

Interface

Ethernet Port

- 10/100/1000BASE-TX PoE

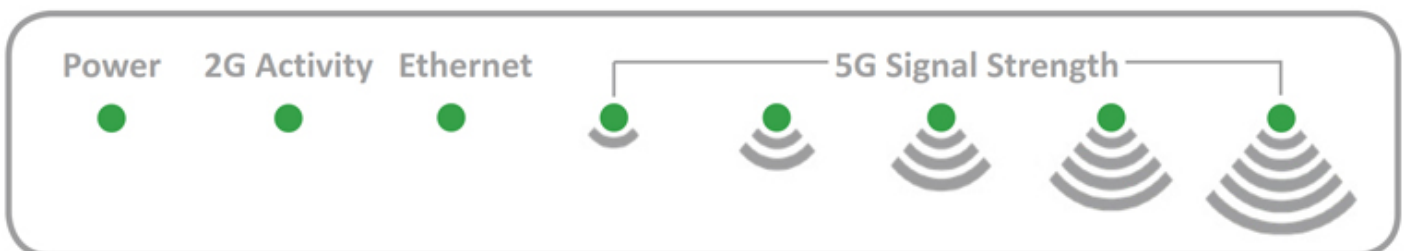

Environment

Operating Temperature

- -40 to 75°C (-40 to 167°F)

Storage Temperature

- -45 to 85°C (-49 to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals

ISO

- Manufactured in an ISO 9001 facility

EMI

FCC Part 15B Class A


FCC Part 15C

Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration Resistance)

FED STD 101C Method 5007.1 (Free fall w/package)

Application

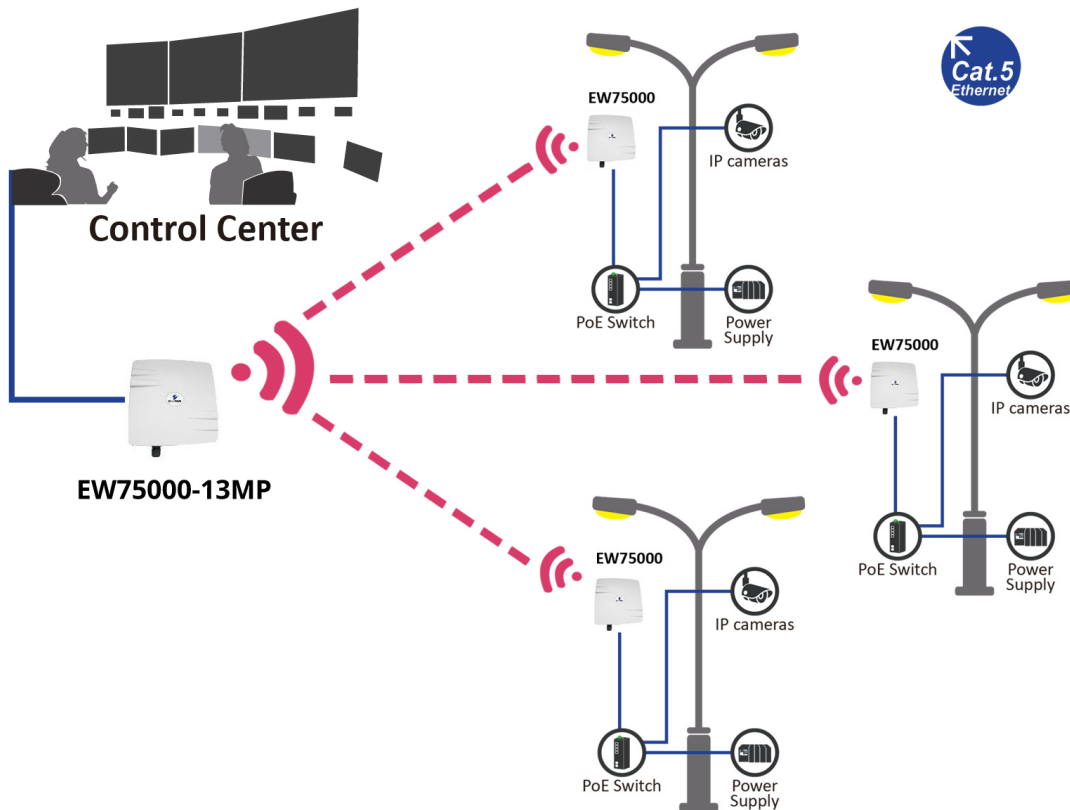

Ordering Info

Model

| | |
|---------------------|---|
| EW75000-13MP | Hardened IP67 outdoor wireless bridge/access point unit with 5GHz/19dBi Panel antenna |
|---------------------|---|

Accessories

| | |
|-------------------|--|
| EW-JPole18 | 18" Wall Mount J-Pole |
| Cable 25 | 25' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating |
| Cable 50 | 50' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating |
| Cable 150 | 150' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating |
| Cable 300 | 330' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating |



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.