

# EasyPoE™ Box Series

NEMA-Rated Indoor/Outdoor Enclosure with Integrated PoE Switch



## Highlights

### + NEMA-Rated Indoor/Outdoor Design for Non-Ventilated & Harsh Environments

Wide operating temperature -40 to 70°C (-40 to 158°F)

Fanless design

Weather-resistant, anti-corrosion, and vandal-resistant design

### + Time/Cost Saving Features

Integrated splicing tray for safe fiber connection storage

Adapter for wall and pole mounting

Preinstalled bulkheads for cable connections and DIN-rail for additional devices/accessories

### + Smart PoE and Power

Futureproof with 90W/port and backward compatibility with all PoE protocols (60W/30W/15W)

PoE watchdog monitors status of connected PoE devices

Built-in power supply and surge protection with auxiliary DC power output

### + Support

Complimentary technical support

Free firmware upgrades and notifications

Limited lifetime warranty

## Overview

EtherWAN's EasyPoE Box Series is an integrated solution that combines a managed PoE switch, splice tray, power supply, and a DIN-rail for accessories, all in a single, secure, NEMA-rated cabinet enclosure. Equipped with up to 4 gigabit PoE ports that provide from 15W up to 90W output per port using the latest IEEE 802.3bt technology and 2 uplink ports, the smart camera box series provides the power, time-saving design, and convenience to support a wide variety of applications including surveillance, LED lighting, and other networking applications.

EtherWAN — "When Connectivity is Crucial."

## 3D Model

## Software Features

### + Interface

- CLI and Web Browser
- SNMP v2/v3

### + Management

- Firmware upgrade
- Configuration backup
- DHCP Client
- RMON (Remote Monitoring)
- Port Mirroring
- SNTP (Simple Network Time Protocol) synchronization
- LLDP (Link Layer Discovery Protocol)
- IPv4/IPv6

### + Security

- MAC address filtering
- Enable/Disable port
- System logging
- IEEE 802.1x LAN Access Control
- Remote authentication through RADIUS
- SSH for CLI and Telnet security
- SSL and HTTPS for Web security
- Multi-user login and privileged access management
- Port security

### + Layer 2 Features

- Auto-negotiation for port speed and duplex mode
- Flow Control
- IEEE 802.3x full duplex mode
- Back-pressure half duplex mode

- Redundant Protocol**
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

- VLANs**
- IEEE 802.1Q Tag VLANs (Up to 32 VLANs)

## Hardware Specifications

### + Interface

#### Ethernet Port

10/100/1000BASE-T PoE: 2 or 4 ports

10/100/1000BASE-T: 0 or 2 ports

100/1000BASE SFP: 0 or 2 ports

#### LED Indicators

Per Unit: Power (Green), Aux Power (Green)

Per Port: Link/Activity (Green: 10/100M, Orange: 1000M; On: connection established, Flashing: data transmission in progress)

Per Port: PoE (Green: Auto Mode, Orange: Force Mode)

#### Mode Button

Exiting without changes

Resetting to the factory settings

Operating with a static IP address

Setting DHCP mode

Setting BootP

Setting unmanaged mode

### + Technology

#### Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3x full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1ab LLDP

IEEE 802.3af/at/bt Power over Ethernet

IEEE 802.1x Port-based Network Access Control

#### Forward/Filtering Rate

14,880pps for 10Mbps

148,880pps for 100Mbps

1,488,000pps for 1000Mbps

#### Processing Type

Store-and-Forward

Auto-Negotiation

Half-duplex back-pressure full-duplex flow control

Auto MDI/MDIX

#### Address Table Size

8K

### + Power

Input

100-240VAC, -15% - +10% (single-phase)

**Output**

24VDC, 300mA (typical)

**PoE Power Output**

Ports 1-3: Up to 90W/port

Port 4: Up to 30W

**PoE Power Budget**

165W (155W if power output used)

## + Physical

**Casing Material**

Polycarbonate (PC)

**IP Rating**

IP65

**NEMA Rating**

NEMA 4/4X

**Impact Protection**

IK10

**Dimensions**

11.2 x 4.8 x 14.3in (W x D x H)

284 x 121 x 364mm (W x D x H)

**Weight**

9.5lbs (4.3Kg)

**Installation Type**

Wall or Pole Mounting

## + Environmental

**Operating Temp.**

-40 to 75°C (-40 to 167°F)

**Storage Temp.**

-40 to 85°C (-40 to 185°F)

**Relative Humidity**

5% to 95% (non-condensing)

**MTBF**

805,920 hours

## + Regulatory

**ISO**

Manufactured in ISO-9001 facility

**EMI**

FCC Part 15B Class A

VCCI Class A

ICES-003

EN 61000-6-4

**EMS**

EN 61000-6-2

EN 61000-6-3

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

EN 61000-4-6 (Induced RFI)

**Safety**

UL 61010

**Vibration**

IEC 60068-2-6

**Shock**

IEC 60068-2-27

## + Warranty

### Length

Limited Lifetime

### Details

[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included

### Device

Smart Camera Box



### Installation

Mounting Adapter


### Documentation

Quick install guide

## Dimensions

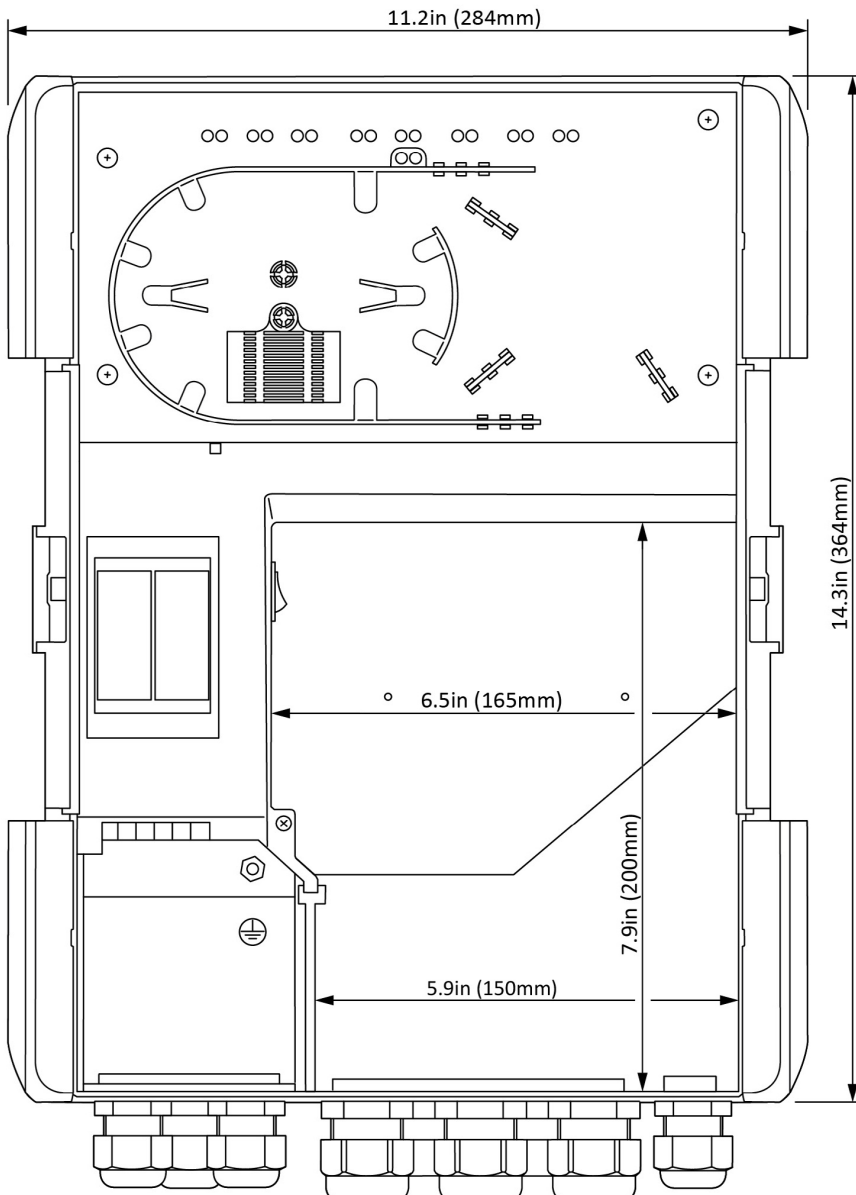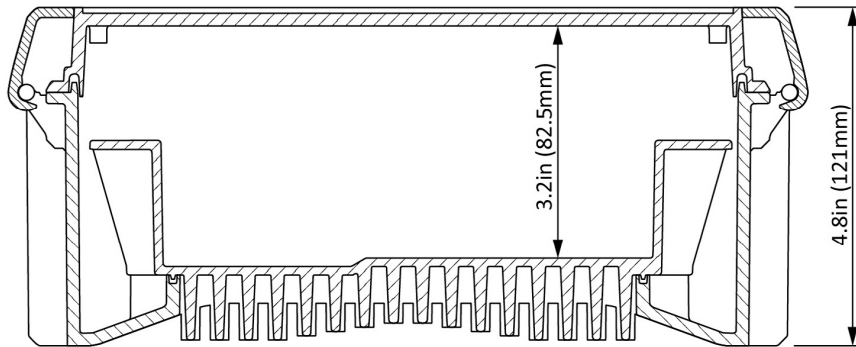

## Application

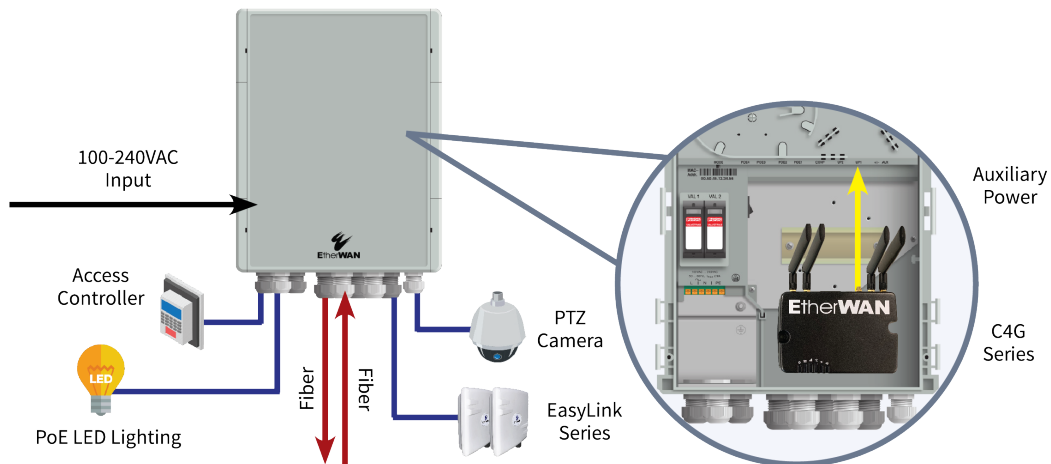

## Ordering Info

### + Model

<b>EASYPOEBOX4F</b>	4-Port 10/100/1000BASE-T PoE + 2-Port 100/1000BASE SFP Managed Ethernet Switch
<b>EASYPOEBOX4C</b>	4-Port 10/100/1000BASE-T PoE + 2-Port 10/100/1000BASE-T Managed Ethernet Switch
<b>EASYPOEBOX2F</b>	2-Port 10/100/1000BASE-T PoE + 2-Port 100/1000BASE SFP Managed Ethernet Switch
<b>EASYPOEBOX2C</b>	2-Port 10/100/1000BASE-T PoE + 2-Port 10/100/1000BASE-T Managed Ethernet Switch

### + Accessories

<b>EASYPOEBOXLOCK</b>	Door lock with locking tab
<b>EASYPOEBOXMCS</b>	Mast clamps for masts (51-127mm)
<b>EASYPOEBOXMCL</b>	Mast clamps for masts (102-254mm)

