


EX78900R Series

Hardened Managed 16-Port Gigabit PoE Ethernet Switch



Highlights

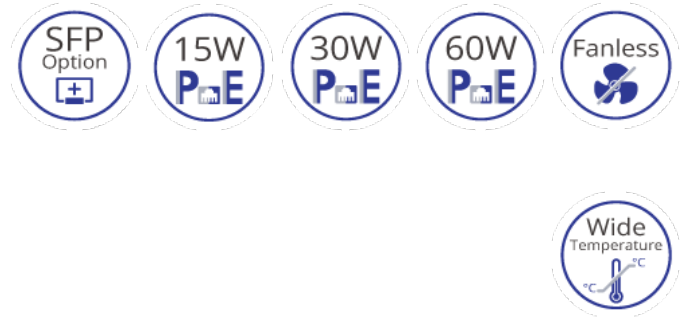

High Bandwidth and Versatility

12 10/100/1000BASE-T(X) ports for high bandwidth connections
4 Dual-rate 100/1000BASE SFP uplink ports for fiber connections
Full capacity switching running at full duplex



Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance



Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
Redundancy with VRRP
Reduces amount of broadcast traffic



PoE Features

IEEE 802.3bt with 60W; 240W Power budget
Long distance PoE up to 250m (820ft)
PoE watchdog monitors status of connected PoE devices



Management/Security Features

Port control
802.1x port-based network access control and remote authentication through RADIUS
Configure and monitor with eVue™ and eLite™



Support

Complimentary Technical Support
Free Firmware Upgrades and notifications
Limited Lifetime Warranty

Overview

EtherWAN's EX78900R series is a hardened managed PoE Ethernet switch platform. Equipped with 12 gigabit PoE ports along with 60W power and IEEE 802.3.bt protocol support and 4 dual-rate gigabit SFP ports, the EX78900R series provides flexibility, speed, and reliability for networks in urban infrastructure, transportation, security, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

Features

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware upgrade
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3

+ Security

MAC Address filtering
Enable/Disable port
Storm control
System logging
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL and HTTPS for web security
ACL (Access Control List, up to 4096 entries)

+ Quality of Service (QoS)

Priority Queues: 8 queues per port
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols
IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs
IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation
Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing
Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy
VRRP

+ Software Properties and Performance

Switching Fabric
32Gbps

Forwarding Rate
23.5Mpps

Max VLANs
256 (4096 VID)

Jumbo Frame Size
9KB

MAC Table Size
16K

Packet Buffer Memory
12M bits

Specifications

+ Interface

Ethernet

12 x 10/100/1000BASE-T(X)

4 x 100/1000BASE SFP

Console

1 x RS232

Config Backup

1 x USB (Type A Connector)

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

Per PoE Port: PoE Status (Orange)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.1ab LLDP

IEEE 802.3af/at/bt Power over Ethernet*

Forward/Filtering Rate

14,800pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

Processing Type

Store-and-forward

Auto-negotiation

Half-duplex back-pressure and full-duplex flow control

Auto MDI/MDIX

System Memory

2Gb DDR3 SDRAM

Flash Storage

1Gb

+ Power

Input

52-57VDC Redundant (Terminal block)

Power Consumption

20W Max (without PoE)

PoE Modes

802.3af/at Mode A: Pins 1/2(+), 3/6(-)

802.3af/at Mode B: Pins 4/5(+), 7/8(-)

802.3bt (60W): Mode A & B, Pins 1/2(+), 3/6(-),
4/5(+), 7/8(-)

PoE Power Output

Ports 1-4, 9-12: Up to 30W/port

Ports 5-8: Up to 60W/port

Power Budget: 240W

Protection

Reverse Polarity Protection

+ Physical

Casing Material

Aluminum

IP Rating

IP30

Dimensions

72 x 140 x 170mm (W x D x H)

2.8" x 5.5" x 6.7"

Weight

1.5kg (3.3lbs)

+ Environmental

Operating Temp.

-40 to 70°C (-40 to 158°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

EN 61000-4-6 (Induced RFI)

EN 61000-4-8 (Magnetic field)

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

FED STD 101C Method 5007.1

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy


+ What's Included

Device
 Ethernet Switch

Cables
 1 Console Cable

Documentation
 Quick install guide

Dimensions

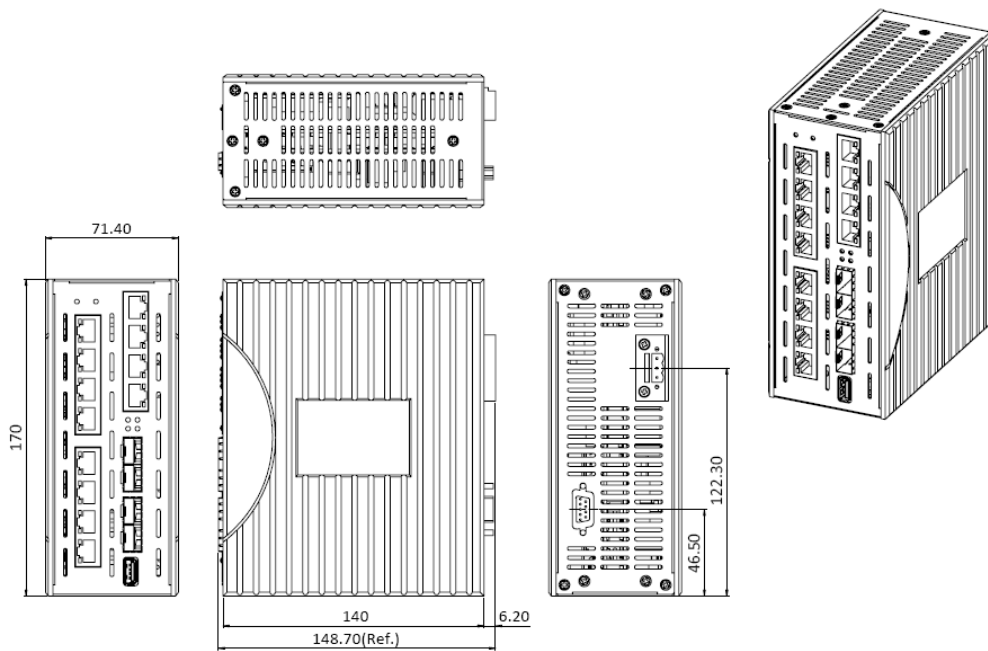

Ordering Info

+ Model

EX78934R-0VB 12-port 10/100/1000BASE-T(X) PoE + 4-port 100/1000BASE SFP

+ Accessories

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.