

EX26262F V2

Managed 24-port Gigabit PoE + 2-port 100/1000 SFP Combo Ethernet Switch

image not found or type unknown



Overview

EtherWAN's EX26262F is a managed 26-port PoE Ethernet switch platform. Equipped with 24 gigabit PoE ports along with a high total PoE power budget of 450W and 2 gigabit combo RJ45/SFP ports, the EX26262F provides flexibility, speed, and reliability for networks in urban infrastructure, security, and other areas where connectivity is crucial

EtherWAN — "When Connectivity is Crucial."

Highlights

+ High Bandwidth and Versatility

- 24 10/100/1000BASE-T(X) ports for high bandwidth connections
- 2 combo RJ45/SFP connections for uplink
- Full capacity switching running at full duplex

+ High Power PoE Power Budget

- Maximum PoE power budget of up to 450W
- Provides up to 30W per port for PTZ cameras and other high power devices

+ Management/Security Features

- PoE watchdog monitors status of connected PoE devices
- 802.1x port-based network access control and remote authentication through RADIUS and TACACS+
- Port control and security

+ Support

- Complimentary technical support
- Free firmware upgrades

Features

+ Interface

CLI, Telnet and Web Browser SNMP v1/v2c/v3

+ Management

Firmware and configuration upgrade and backup via TFTP

Supports DHCP Server/Client

RMON (Remote Monitoring): group 1, 2, 3, 9

Port mirroring: TX/RX and both

NTP (Network Time Protocol) Time Synchronization

IEEE 802.1ab LLDP (Link Layer Discovery Protocol)

IPv4/IPv6

PoE Watchdog

Virtual Stacking

+ Security

MAC Address Filtering

Enable/Disable Port

Storm Control (Broadcast and Multicast Types)

IEEE802.1x LAN Access Control

Remote Authentication through RADIUS & TACACS+

SSH for CLI and Telnet Security

SSL for Web Security

System Log

ACL

+ Quality of Service (QoS)

Priority Queues: 8 Queues per Port

Traffic Classification Based on IEEE802.1p CoS, DSCP, WRR, and Strict Mode

Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Flow Control

IEEE802.3x full duplex mode

Back-Pressure half duplex mode

Redundant Protocol

IEEE802.1D Spanning Tree Protocol (STP)

IEEE802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE802.1s Multiple Spanning Tree Protocol (MSTP)

VLANs

Supports up to 4K VLANs simultaneously (128 groups, 4096 VID)

Port-based VLAN

Voice VLAN

Link Aggregation

Static trunk (13 groups, 4 ports per group)

IEEE802.3ad Link Aggregation Control Protocol

IGMP Snooping

IGMP snooping v1/v2/v3

Specifications

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-T
IEEE 802.3ab 1000BASE-T
IEEE 802.3ad LACP
IEEE 802.3af PoE
IEEE 802.3at PoE+
IEEE 802.3x Full duplex and flow control
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x Port-based Network Access Control
IEEE 802.1ab LLDP
G.0832 ERPS

Forward/Filtering Rate

14,800pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10gbps

Packet Buffer Memory

32M Bits

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

Address Table Size

32K MAC Addresses

Switching Fabric

176Gbps

Forwarding Rate

130.94Mpps

Jumbo Framze Size

9.6KB

+ Interface

Ethernet

10/100/1000BASE-T(X): 24 ports
100/1000 Combo (RJ45 or SFP): 2 ports

Console

Two Ports
1 x RJ45

LED Indicators

Per Unit: Power
Per Port: Link/Activity, PoE

+ Power

Input

100-240VAC

Power Consumption

37W Max (without PoE) w/ PoE power budget of 450W
up to 30W/port Poe power output

+ Physical

Casing Material

Aluminum

Dimensions

EX26262F: 17.3" x 12.99" x 1.73" (W x D x H)

(440 x 330 x 44mm)

Weight

10.56lbs (5.5kg)

Installation Type

Rack Mounting

+ Environmental

Operating Temp.
32 to 122°F(0 to 50°C)

Storage Temp.
-10 to 158°F (-10 to 70°C)

Relative Humidity
10% to 90% (non-condensing)

+ Regulatory

EMI
FCC Part 15B
VCCI Class A
CE Mark Class A

Safety
UL 62368-1

+ Warranty

Length
3 Years

Details
www.etherwan.com/support/warranty-policy


+ What's Included

Device
Ethernet Switch

Accessories
AC Power Cord
Rack Mounting Kit

Documentation
Quick install guide

Application

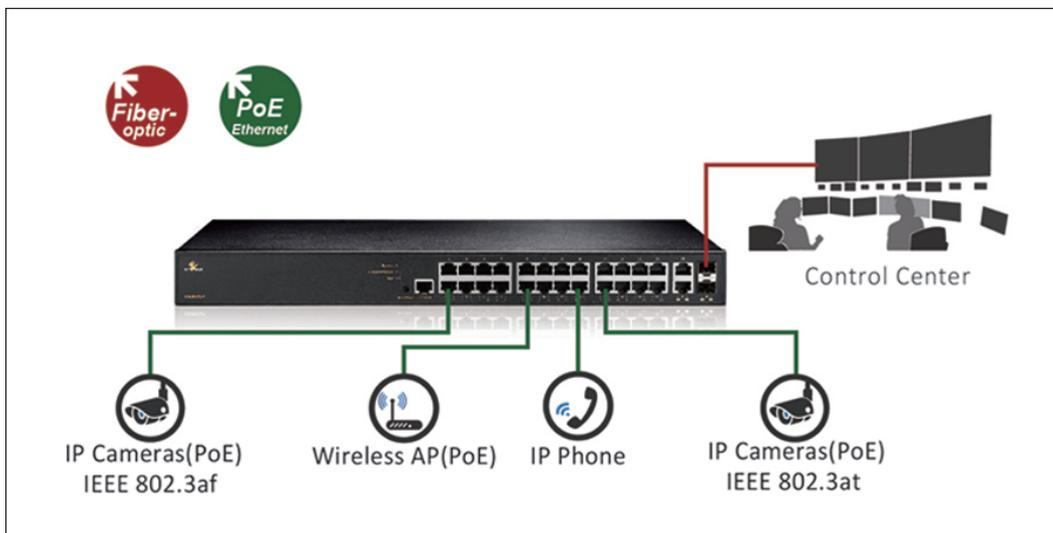

Dimensions

EX26262F_v2_Dimensions

Image not found of type unknown

Ordering Info

+ Model

EX26262F	Managed 24-port Gigabit PoE + 2-port 100/1000 SFP Combo Ethernet Switch
----------	---

* Rack mounting kit included



© EtherWAN Systems, Inc. All rights reserved. 20240906

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.