Huiling - IG5 SV Series-US

IEC 61850-3/IEEE 1613 Hardened Managed 24-port Gigabit (8*PoE) and 4-port 1G/10G SFP+ Ethernet PoE Switch

Overview

When should you use an Industrial Layer 3 switch?

123 EtherWAN's IG5 SV switches have been enhanced for better performance and retain the original versatile port combination of the IG5 series. New options include 8 IEEE 802.3af/at PoE ports combined with either 16 TX ports or 8 TX ports, providing more flexible network applications. These models deliver up to 30 watts per port and built-in intelligent controller optimizes real-time allocation of 90w total power budget, making ideal for applications requiring high power safety protection and integrated network power configuration.

With a minimum input voltage of 24VDC, rugged IP40 metal casing protection combined with a more compact body size offers better flexibility for installation in spaces with limited depth. Rich Layer 2 and Layer 3 management functionalities, featuring equipped digital I/O and relay control ports, expanding for detection and alarm systems, enable diverse network construction.

All models meet the IEC 61850-90-4 GOOSE message transmission requirements and the IEEE 1588v2 Precision Time Protocol (PTP) for network time synchronization, ensure rapid response and high reliability of the power system. With 10G bandwidth, IEEE 802.3at type 2 compatibility, and compliance with IEC 61850-3 ,IEEE 1613, and IEC 60255- 27 with up to 5kV Impulse protection. The IG5 SV is an ideal choice for critical mission applications such as urban infrastructure, intelligent transportation, industrial IoT, and smart energy network management.

EtherWAN — "**When Connectivity is Crucial.**"

Highlights

High Bandwidth and Versatility

24 full gigabit port with multiple configurations

4 1G/10G SFP+ uplink ports

Sufficient switching capacity at 128Gbp

DnA solutions for Digital I/O & Relay control

PoE Features

8-port IEEE 802.3 af/at PSE with 90W total power budget

PoE watchdog monitors status of connected PD devices

Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF

Redundancy with VRRPv2

Flexible Installation

Support Rack and Panel mount installation

Concise communication status display

Considerable ease of cabling management

Substation communication and time synchronization

Complies with IEC61850-90-4 GOOSE and multicast message transmission

IEEE 1588v2 Available in all ports

Support One-Step and Two-Step delay measurement mechanism

Operation as transparent clock

Designed for Crucial Environments

Wide Operation Temperature range from -40 to 75°C(-40 to 167°F)

Thermal shock and electrical noise resistance

Features

Interface

CLI, Telnet, Web GUI

Management

Firmware Upgrade

Configuration Backup

DHCP Server/Client

RMON (Remote Monitoring)

Port Mirroring

NTP (Network Time Protocol) Synchronization

LLDP (Link Layer Discovery Protocol)

IPv4/IPv6

SNMP v1/v2c/v3

Modbus

Security

MAC Address Filtering

Enable/Disable Port

Storm Control

System Logging

IEEE 802.1x LAN Access Control

Remote Authentication through RADIUS and TACACS+

Complex Password Support

Multi-user Login and Privileged Access Management

SSH for CLI and Telnet Security

SSL and HTTPS for Web Security

ACL (Access Control List, up to 4096 Entries)

IPSG (IP Source guard)

DAI (Dynamic ARP Inspection)

DHCP Snooping

Layer 2 Features

Auto-negotiation for Port Speed and Duplex

Flow Control

IEEE 802.3x full duplex mode

Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP

IEEE 802.1w RSTP

IEEE 802.1s MSTP

EtherWAN's Alpha-Ring network fault recovery

VLANs

IEEE 802.1Q Tag VLANs

GVRP

GMRP

Link Aggregation

Static Trunk (4 groups)

IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware:
512 entries

Static Routing

RIP v1/v2

OSPF v2

Routing Redundancy

VRRPv2

Quality of Service (QoS)

Priority Queues: 8 Queues Per Port

Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode

Rate Limiting (Ingress/Egress)

Software Properties and Performance

Switching Fabric

128Gbps

Forwarding Rate

95.23Mpps

Max VLANs

256 (4096 VID)

Jumbo Frame Size

9KB

MAC Table Size

16K

Packet Buffer Memory

12M bits

Dimensions

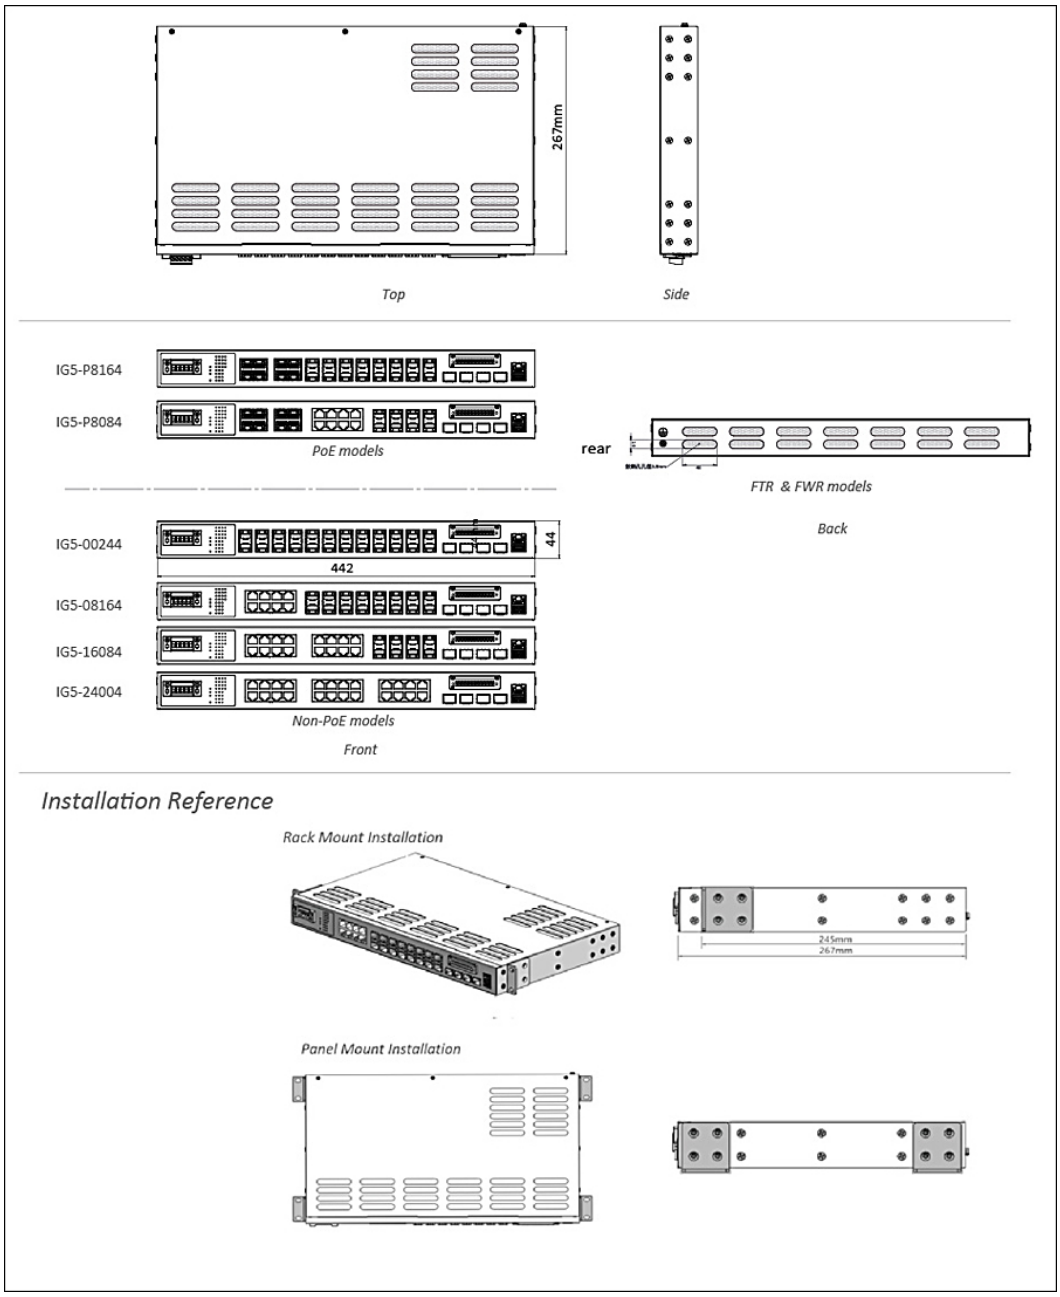
267mm
Top
Side
IG5-P8164
IG5-P8084
PoE models
rear
FTR & FWR models
Back
IG5-00244
442
44
IG5-08164
IG5-16084
IG5-24004
Non-PoE models
Front
Installation Reference
Rack Mount Installation
245mm
267mm
Panel Mount Installation

Ordering Info

PoE Models

IG5-P8084FTE	8-port 10/100/1000BASE-T(X) PoE + 8-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-P8164FTE	8-port 10/100/1000BASE-T(X) PoE + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

Non-PoE Models

IG5-24004FTE	24-port 10/100/1000BASE-T(X) + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-16084FTE	16-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-08164FTE	8-port 10/100/1000BASE-T(X) + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-00244FTE	24-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

Accessories

Part Number	Speed Info	Mode	Distance	Operating Temperature	Wavelength	DDM
EX-0155NSP-MB2L-A	100Mbps	Multi	2km	-40 to 85°C	1310nm	-
SFPMIS20M	100Mbps	Single	20km	-40 to 85°C	1310nm	✔
SFPGIM5AM	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✔
SFPGIM02M	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✔
SFPGIS10M	1000Mbps	Single	10km	-40 to 85°C	1310nm	✔
SFPTIM3AM	10Gbps	Multi	300m	-40 to 85°C	850nm	✔
SFPTIM3AM	10Gbps	Single	10km	-40 to 85°C	1310nm	✔

For more SFP, please visit website:

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened 10G SFP+ Modules	www.etherwan.com/jp/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/jp/products/din-rail-power-supply

© EtherWAN Systems, Inc. All rights reserved. 20250709
EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.