


EX77964

Lite L3 広範囲動作温度対応産業用/管理型 24ポート ギガビット+ 4ポート1G/10G SFP+ イーサネットスイッチ

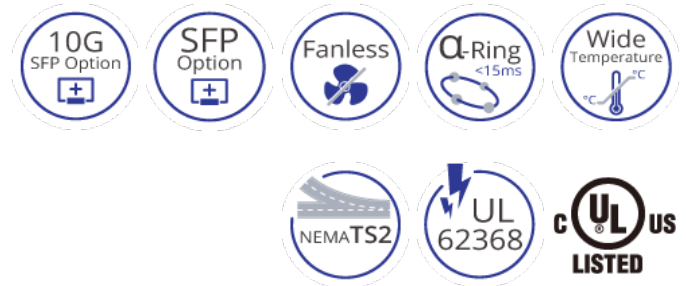

概要

EtherWANのEX77964 シリーズは広範囲動作温度対応 管理型 全ギガビット最大28ポート運用可能なイーサネットスイッチです。スタティック ルーティング、ルーティングエンフォースメントプロトコル (RIP) V1/V2とVirtual Router Redundancy Protocol (仮想ルータ冗長プロトコルVRRP) などのレイア3 ルーティング プロトコルを搭載した堅牢な管理機能と産業用仕様にあわせ、柔軟に安全的にハイパフォーマンスとコスト的なパッケージをご提供します。

EX77964は28ポートギガビット、又は24ポート ギガビット カッパー ポート +10G SFP+ 4ポートを装備し、コア ネットワークの一員として、使用されており、深さ254mmの特別な筐体設計により、狭いキャビネットの装置に最適です。

ポート セキュリティや IGMP snooping、ポートベース VLAN、GARPプロトコル、リンク アグリゲーションと ACLなどの様々な管理機能をブラウザ経由で設定可能で、Telnet、SSH、SNMP、RMON、TFTP、RS-232コンソール接続などにも対応します。EX77964は産業用-40~75°Cの広温度範囲の環境に安定したハイパフォーマンスをご提供します。

EtherWAN — "When Connectivity is Crucial."

特長

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ High Bandwidth and Versatility

Up to 24 10/100/1000BASE-T(X) ports
Up to 8 dual-rate 100/1000BASE SFP ports
4 1G/10G SFP+ uplink ports

+ Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF support
Redundancy with VRRP
Reduces amount of broadcast traffic

+ Support

Complimentary Technical Support
Free Firmware Upgrades
Limited Lifetime Warranty

機能

+ Interface

CLI, Telnet and Web Browser
SNMP v1/v2c/v3

+ Management

Firmware upgrade
Configuration backup via TFTP
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring: TX/RX and both
NTP (Network Time Protocol) synchronization
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
IPv4/IPv6

+ Security

MAC Address Filtering
Enable/Disable port
Storm control (Broadcast and multicast types)
IEEE 802.1x LAN Access Control
Remote authentication through RADIUS and TACACS+
SSH for CLI and Telnet security
SSL for web security
ACL (Access Control List)

+ Quality of Service (QoS)

Priority Queues: 4 queues per port
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex mode
Flow Control
IEEE 802.3x Full duplex mode
Back-Pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery (<15ms) and Alpha-Chain

VLANs

IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups, support MAC base)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRP

仕様

+ Interface

Ethernet

16 or 24 x 10/100/1000BASE-T(X)

8 x 100/1000BASE SFP

4 x 10G SFP+

Console

1 x RJ45 RS-232

Config Backup

1 x USB (Type A Connector)

Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

LED Indicators

Per Unit: Power

Per Port: Link/Activity (Green)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1x PNAC

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

14,881,000pps for 10Gbps

Processing Type

Store-and-Forward

Auto-negotiation

Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control

Auto MDI/MDIX

Address Table Size

16K MAC Addresses

+ Power

Input

12-24VDC Redundant (Terminal block)

Power Consumption

31.08W

+ Physical

Casing Material
Metal

IP Rating
IP30

Dimensions
430 x 254 x 44.2mm (W x D x H)
16.9" x 10" x 1.74"

Weight
3.29Kg (7.25lbs)

Installation Type
Rack mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic Field)

Safety
UL 62368

Vibration
IEC 60068-2-6 Fc

Shock
IEC 60068-2-27 Ea

Free Fall
FED STD 101C Method 5007.1

Industrial Compliance
NEMA TS2

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy

+ What's Included

Device
Ethernet Switch


Cables
1 Console Cable

Installation


Mounting brackets

Documentation
Quick Install Guide

寸法図

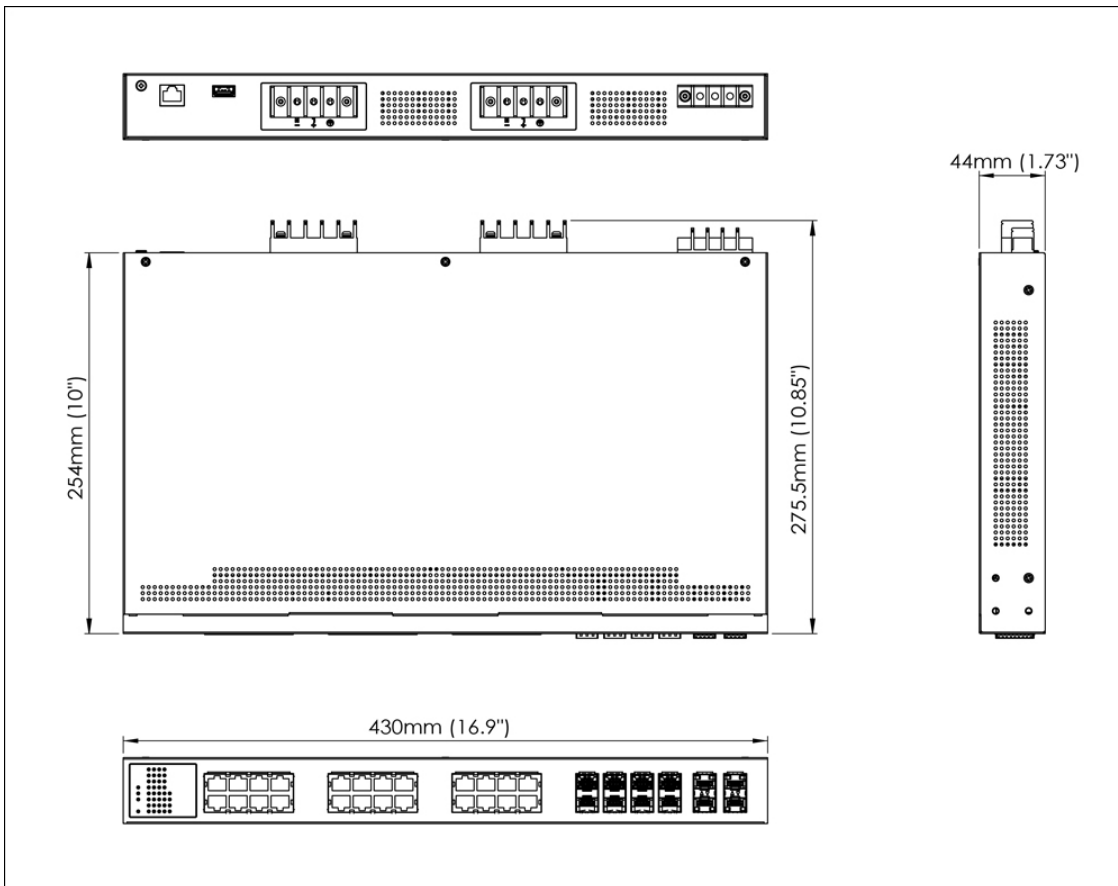


応用例

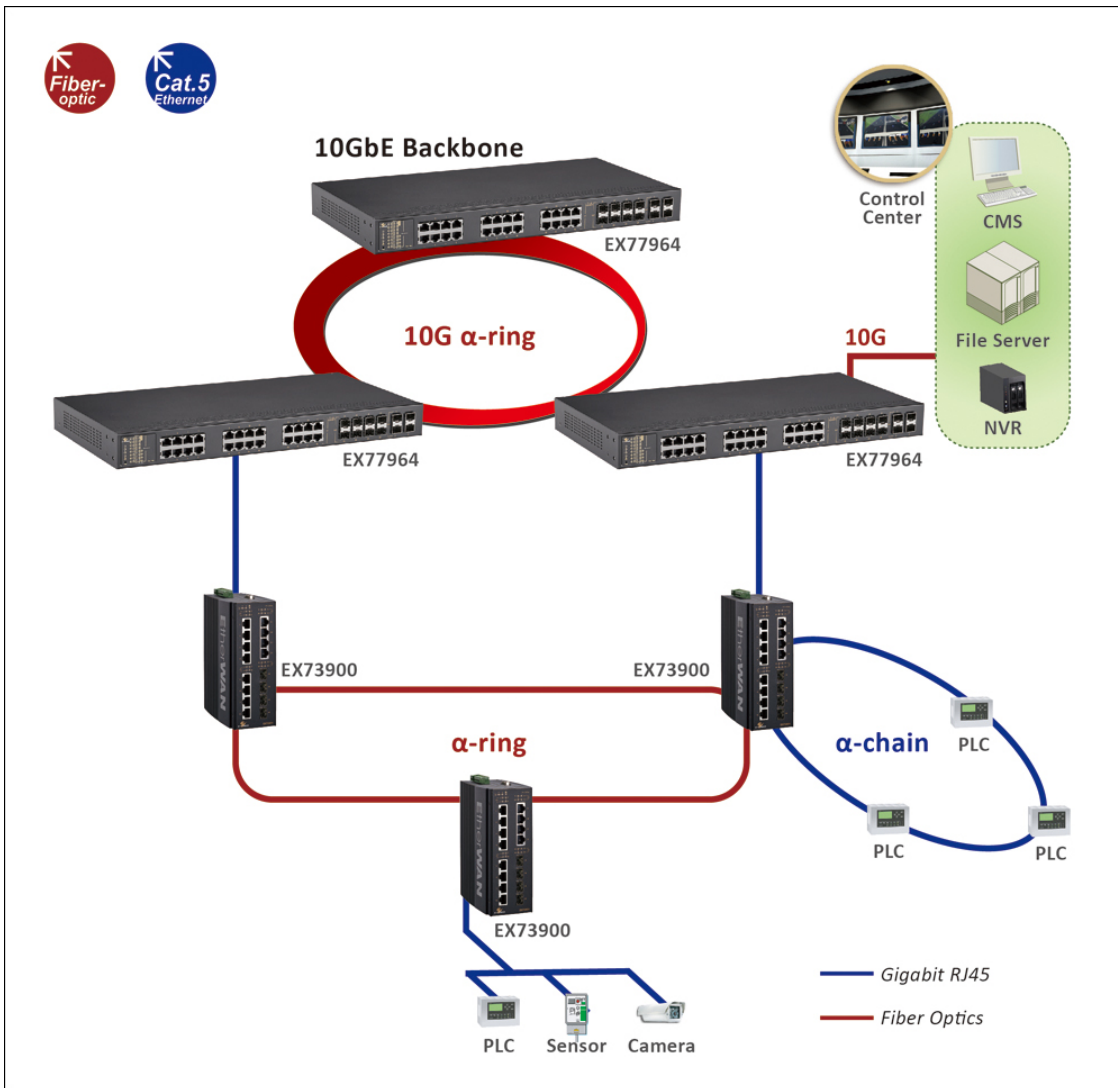

ソフトウェア

Network Management [eVue™ Network Configuration and Monitoring Tool](#)
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

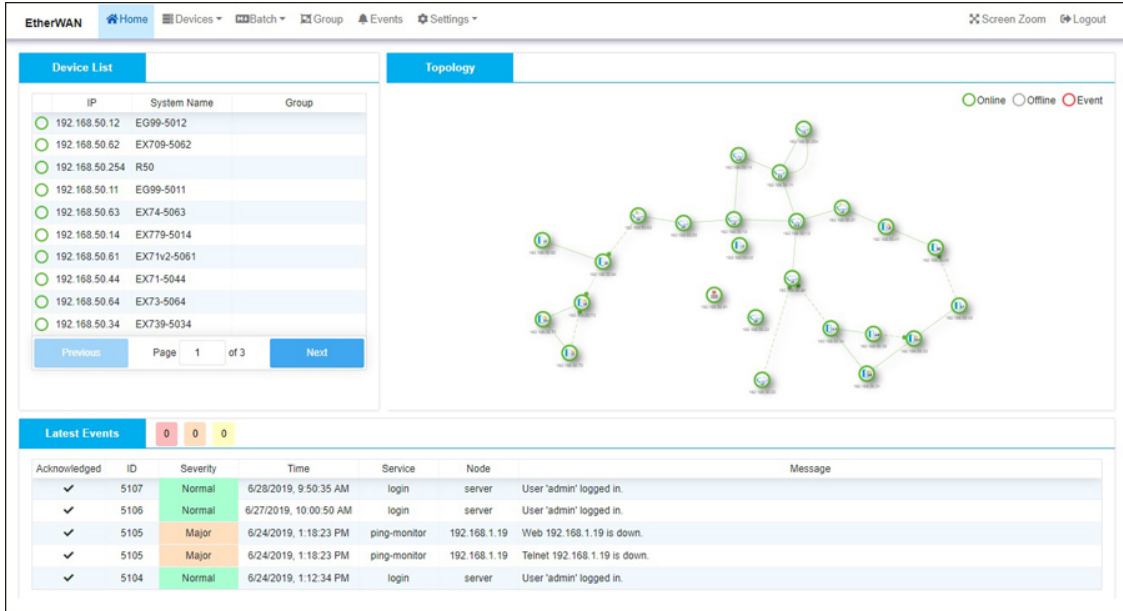

The screenshot shows the EtherWAN web interface. At the top, there are navigation tabs: Home, Devices, Batch, Group, Events, and Settings. The main content area is divided into two sections: 'Device List' and 'Topology'.

Device List: A table with columns for IP, System Name, and Group. It lists 12 devices, all with green status indicators.

| IP | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12 | EG99-5012 | |
| 192.168.50.62 | EX709-5062 | |
| 192.168.50.254 | R50 | |
| 192.168.50.11 | EG99-5011 | |
| 192.168.50.63 | EX74-5063 | |
| 192.168.50.14 | EX779-5014 | |
| 192.168.50.61 | EX71v2-5061 | |
| 192.168.50.44 | EX71-5044 | |
| 192.168.50.64 | EX73-5064 | |
| 192.168.50.34 | EX739-5034 | |

Topology: A network diagram showing various nodes connected in a mesh-like structure. A legend indicates Online (green circle), Offline (grey circle), and Event (red circle).

Latest Events: A table showing recent system events.

| Acknowledged | ID | Severity | Time | Service | Node | Message |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓ | 5107 | Normal | 6/28/2019, 9:50:35 AM | login | server | User 'admin' logged in. |
| ✓ | 5106 | Normal | 6/27/2019, 10:00:50 AM | login | server | User 'admin' logged in. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓ | 5104 | Normal | 6/24/2019, 1:12:34 PM | login | server | User 'admin' logged in. |



The screenshot shows the eLite web interface. At the top, there are navigation tabs: List Server, Firmware, Configuration, and Help. The main content area is a table with columns for IP Address and MAC Address.

| IP Address | MAC Address |
|---------------|-------------------|
| 192.168.50.22 | 00:e0:b3:50:22:00 |
| 192.168.50.31 | 00:e0:b3:50:31:00 |
| 192.168.50.72 | 00:e0:b3:50:72:00 |
| 192.168.50.55 | 00:e0:b3:50:55:00 |
| 192.168.50.23 | 00:e0:b3:50:23:00 |
| 192.168.50.73 | 00:e0:b3:50:73:00 |
| 192.168.50.44 | 00:e0:b3:50:44:00 |
| 192.168.50.64 | 00:e0:b3:50:64:00 |
| 192.168.50.43 | 00:e0:b3:50:43:00 |
| 192.168.50.62 | 00:e0:b3:50:62:00 |
| 192.168.50.71 | 00:e0:b3:50:71:00 |
| 192.168.50.24 | 00:e0:b3:50:24:00 |

The interface also includes a search bar and a 'Ready' status indicator at the bottom.

製品型番

+ Model

EX77964-8VB 16-port 10/100/1000BASE-TX + 8-port 100/1000BASE SFP Combo + 4-port 1G/10G SFP+ (12-24VDC)

+ Accessories

| | |
|---|--|
| Hardened 100BASE SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| Hardened Gigabit and 10-Gigabit SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| DIN-Rail Power Supplies | www.etherwan.com/products/din-rail-power-supply (*) |
| *Recommended Power Supply EB-232 | HDR-60-24 60W 24VDC DIN-Rail Power Supply Configuration Backup and Restoration Tool |

