


EL1141 系列

IEC 61850/IEEE 1613 強固級10/100BASE-TX- 100BASE-FX 光電轉換器

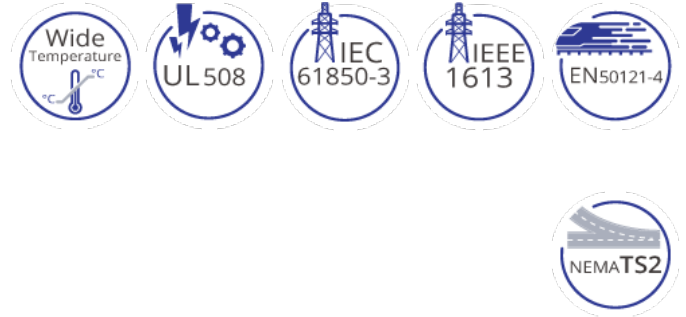

產品介紹

EL1141光電轉換器具備1組獨立10/100BASE-T網路埠和1個100BASE-SX-LX光纖埠，支援雙電源輸入、斷線告警、Link-Fault-Pass-Through等功能，符合IEC 61850-3/IEEE 1613相容認證，抗電磁干擾設計，適用於變電站、電力整合等應用市場。

EL1141光電轉換器採工業等級設計，可承受強力的落摔衝擊、防震動及抗電磁波干擾，更可在-40到75°C寬溫環境下穩定運作，於嚴峻的專案規劃佈局中扮演致勝的關鍵角色。

EtherWAN — "When Connectivity is Crucial."

產品亮點

符合IEC 61850-3/IEEE 1613認證

- » 符合變電站自動化所需之應用標準

符合EN 50121-4認證

- » 專為軌道環境應用設計及測試

強固等級設計

- » 寬溫操作(-40到75°C)

支援Link-Fault-Pass-Through (LFPT)

- » 針對光電轉換器連線狀態提供持續的監控
- » 當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路(RJ-45)埠之連線，以告知連線之設備網路連線已中斷

產品規格

技術

標準

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/FX
- IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

緩衝記憶體封包

- 128K bits

傳輸型式

- Store-and-forward
 - Auto Negotiation
 - Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
 - Auto MDI/MDIX
-

電源

輸入電壓

- 12-48VDC (Terminal Block)
- 12VDC (DC Jack)

電力功耗

- 2.4W MAX. 0.2A@12VDC, 0.05A@48VDC

Protection

- Overload current protection
 - Reverse polarity protection
-

機構

機殼

- Aluminum Case

- IP30

尺寸

- 50 x 110 x 135mm (W x D x H)
(1.97" x 4.33" x 5.31")

重量

- 0.8Kg (1.76lbs.)

安裝方式

- DIN-Rail (Top hat type 35mm), Panel, or Rack mounting
-

介面

乙太網路埠

- 10/100BASE-TX: 1 port
- 100BASE-FX: 1 port

LED 指示燈號

- Per Unit: Power 1, Power 2, Fault, Link-Fault-Pass-Through
- Per Port 10/100TX: Link/Activity, Full-duplex/Collision, Speed
- Per Port 100FX: Link/Activity, Full-duplex/Collision

Relay Contact

- Relay contact rating with current 1A@30VDC, 0.5A@120VAC
-

環境

工作溫度

- -40 to 75°C (-40 to 167°F)
Tested @ -40 to 85°C (-40 to 185°F)

儲存溫度

- -40 to 85°C (-40 to 185°F)

工作濕度

- 5% to 95% (無凝結)
-

通過認證

ISO

- Manufactured in an ISO 9001 facility

Safety

UL 508

EMI

FCC Part 15B Class A

EN 61000-6-4

EN 55022

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration Resistance)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)


EMS

IEC 61850-3/IEEE 1613


EN 50121-4

NEMA TS2

產品應用圖

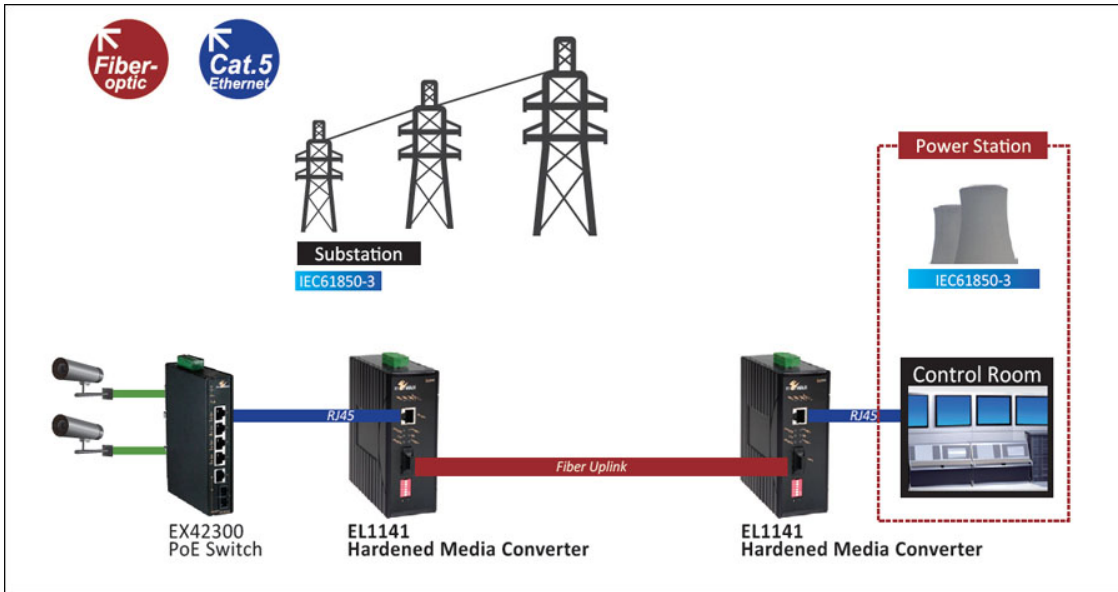

產品尺寸圖

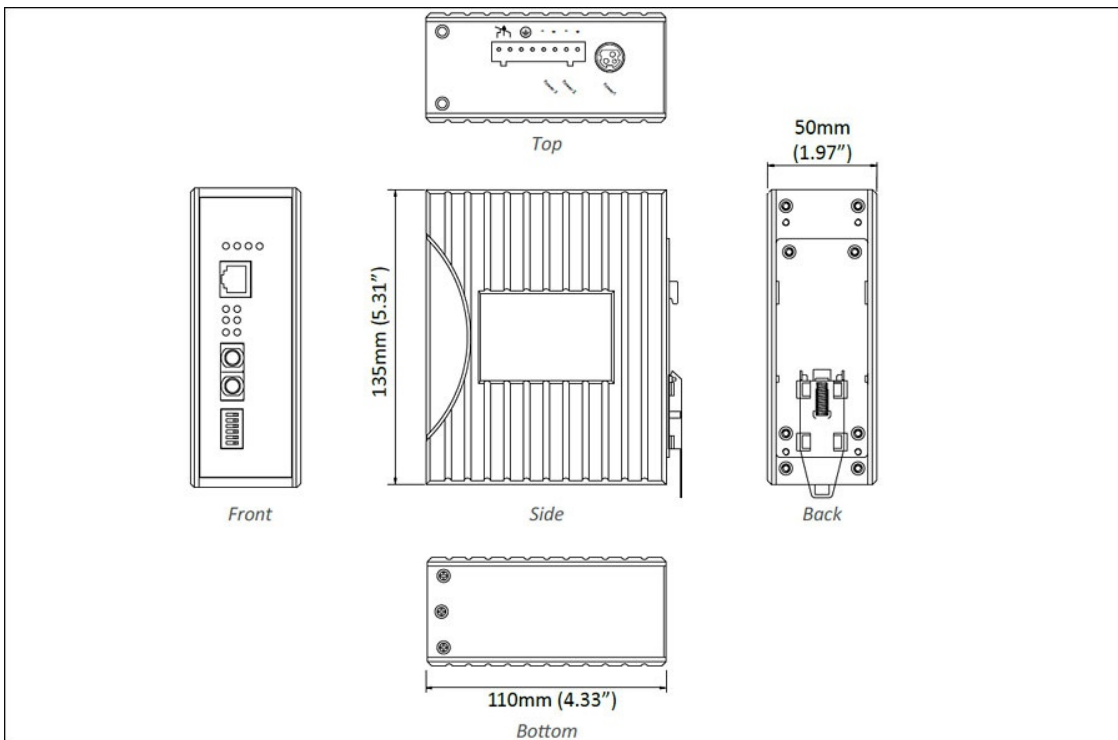

訂購型號

型號

EL1141-X0B	10/100BASE-TX to 100BASE-FX Hardened Media Converter
-------------------	--

* DIN-Rail mounting kit included.

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km (1310nm)
2	Multi Mode (ST) - 2Km (1310nm)
A	Single Mode (SC) - 20Km (1310nm)
B	Single Mode (SC) - 40Km (1310nm)
H	Single Mode (ST) - 20Km (1310nm)
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

* More 100FX Fiber options also available upon request.

Optional Accessories

KP-AA96-480	Panel mounting kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply

EX41-145046-X

Power Supply 45W 12VDC with Open Wire
(X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.